

Super-mini Two-wire Signal Conditioners T-UNIT

Span adjustment: 95 to 105 % (front)

SIGNAL TRANSMITTER


(isolated)

Functions & Features

- Converting a DC input into an isolated 4 - 20 mA DC signal
- Monitor terminals
- High-density mounting

Typical Applications

- mV, voltage and current scaling

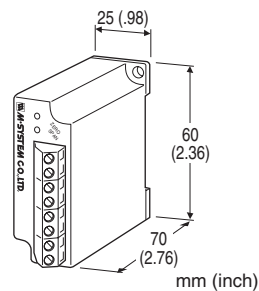

MODEL: TVS-[1]

ORDERING INFORMATION

- Code number: TVS-[1]
- Specify a code from below for [1].
(e.g. TVS-6)
- Special input range (For code 0)

[1] INPUT

Voltage

- 1: 0 - 10 mV DC (Input resistance 10 kΩ min.)
- 2: 0 - 100 mV DC (Input resistance 100 kΩ min.)
- 3: 0 - 1 V DC (Input resistance 1 MΩ min.)
- 4: 0 - 10 V DC (Input resistance 1 MΩ min.)
- 5: 0 - 5 V DC (Input resistance 1 MΩ min.)
- 6: 1 - 5 V DC (Input resistance 1 MΩ min.)
- 0: Specify voltage (0 % or 50 % input must be equal to 0 V.)

GENERAL SPECIFICATIONS

Construction: Stand-alone; terminal access at the front

Connection: Euro type terminal

(applicable wire size: 0.25 to 1.5 mm², stripped length 7 mm)

Housing material: Flame-resistant resin (black)

Isolation: Input to output

Zero adjustment: -5 to +5 % (front)

INPUT SPECIFICATIONS

Input: -300 - +300 V DC

Minimum span: 10 mV

Input resistance

(Input Span: Input Resistance)

10 - 100 mV: ≥ 10 kΩ

0.1 - 1 V: ≥ 100 kΩ

≥ 1 V: ≥ 1 MΩ


OUTPUT SPECIFICATIONS

Output: 4 - 20 mA DC

Load resistance vs. supply voltage:

Load Resistance (Ω) = (Supply Voltage (V) - 12 (V)) ÷ 0.02

(A) (including leadwire resistance)

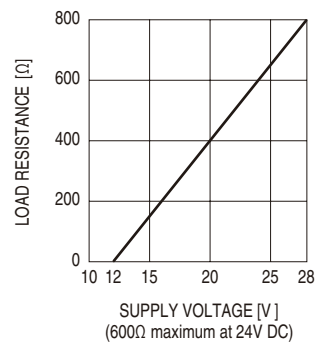

INSTALLATION

Supply voltage: 12 - 28 V DC

Operating temperature: -5 to +60°C (23 to 140°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Surface or DIN rail

Weight: 120 g (0.26 lb)

PERFORMANCE in percentage of span

Accuracy: ±0.1 %


Temp. coefficient: ±0.015 %/°C (±0.008 %/°F)

Response time: ≤ 0.5 sec. (0 - 90 %)

Insulation resistance: ≥ 100 MΩ with 500 V DC


Dielectric strength: 500 V AC @ 1 minute (input to output)

EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm (inch)

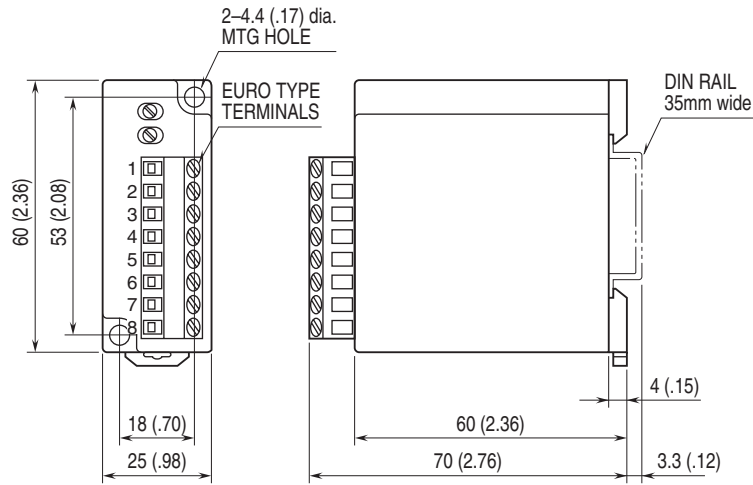

•When mounting, no extra space is needed between units.

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

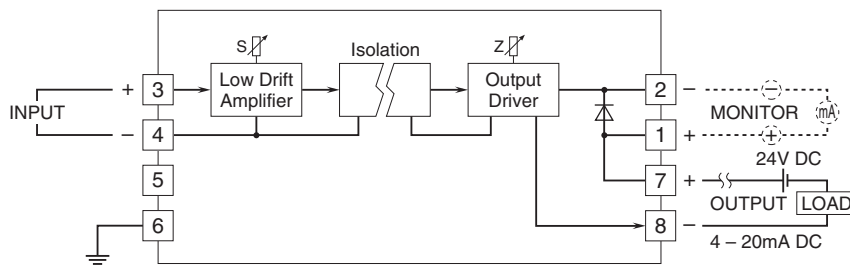

Specifications are subject to change without notice.