

EFRP-G507

500W ERP1U Redundant Power Module

Features:

- 80PLUS Gold Level High Efficiency
- 500W with +12V and +5VSB Output
- PMBus 1.2 Support
- 0~50°C Working Temperature

General Specification

- Input Range: 100 to 240 VAC, +/-10%
- Power Factor: ≥0.95 minimum
- Efficiency: Meet 80plus Gold Level Standard
- Hold Up Time: 16ms minimum @70% load
- Short Circuit Protection
- Over Current Protection
- Over Voltage Protection
- Over Temperature Protection
- MTBF >100,000 Hours
- Operating Temperature: 0 to 50°C
- Operating Humidity: 20 to 90 %
- EMI/RFI: CE, FCC class B
- Safety: UL, TUV, CCC, CB, BSMI



Input and Output Characteristics

Input			DC Output		
Voltage	Frequency	Current	Load	+12V	+5VSB
100~240VAC	47~63Hz	7~3.5A	Max.Load	41A	3A
			Min.Load	1A	0A

Note: Total combined output shall not exceed 650W


Ripple and Noise

Output	+12V	5Vsb
Load Regulation	± 5%	± 5%
Line Regulation	± 1%	± 1%
Ripple & Noise	120mV	60mV

Mechanical

Outline Dimension: 50.5(W) x 40(H) x 280(D) mm

Outline Drawing

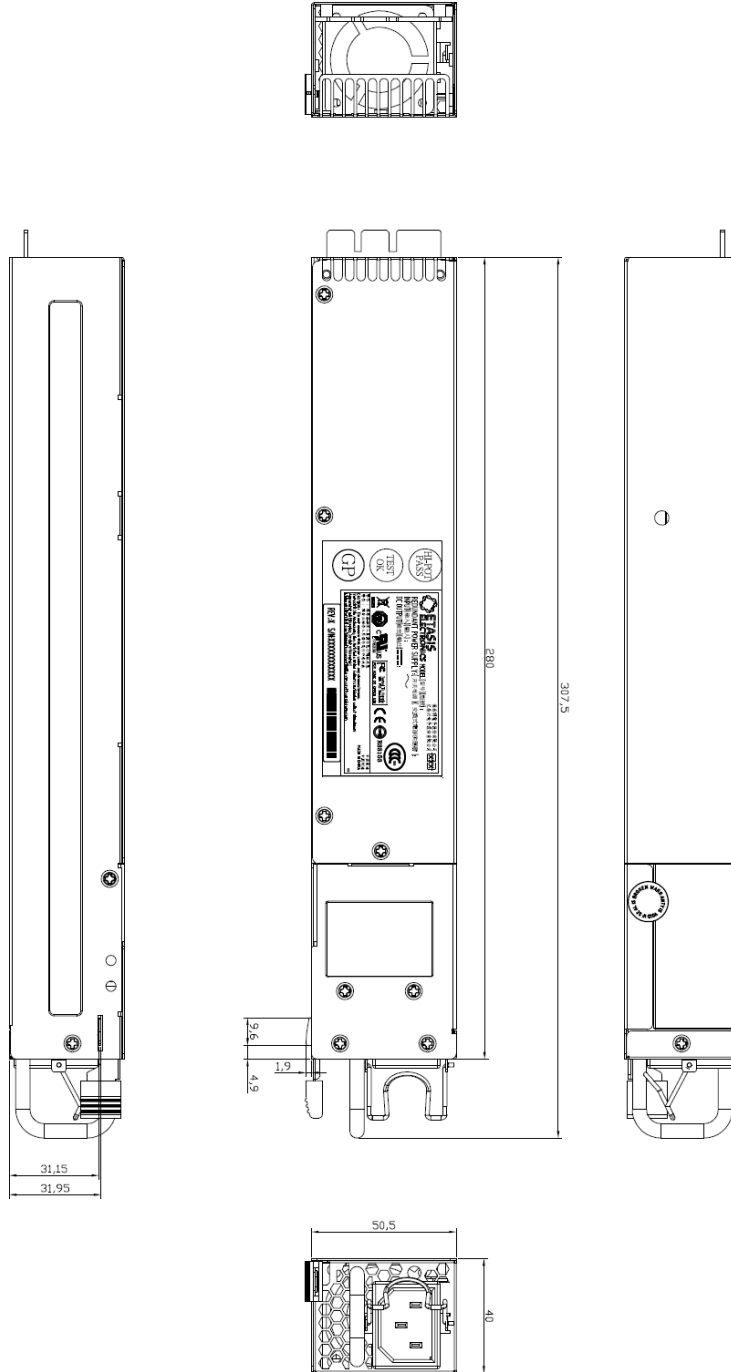

©ETASIS Electronic Corporation. All rights reserved. ETASIS Electronics Corporation reserves the right to make changes to their products, specification, or to discontinue any product and its service at anytime without notice. The information and specification from ETASIS is believed to be accurate and reliable. However, ETASIS assumes no responsibility for any business loss due to specification changes. ETASIS products are not designed to be used in system deemed to be critical, or in any system wherein failure or malfunction could result in injury or death.