


■ ELECTRICAL SPECIFICATION

PARAMETER	SPECIFICATIONS	UNIT
Frequency Range	470 ~ 490	MHz
VSWR, max	1.5	-
Input Impedance	50	Ω
Radiation	Omni-direction	-
Polarization	Vertical	-
Gain	5.5	dBi
Power, max	150	W
Lighting Protection	Direct – current earth	-


■ MECHANICAL SPECIFICATION

PARAMETER	SPECIFICATIONS	UNIT
Length	1200 \pm 50	mm
Pedestal Diameter	86	mm
Connector	BNC	-
RF Cable	Type	RG58
	Length	3000

■ DIMENSIONS

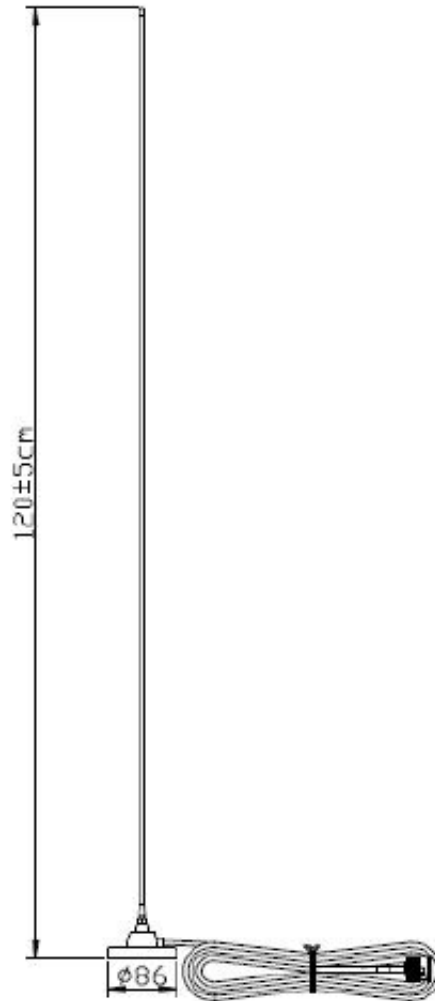

■ FREQUENCY CHARACTERISTICS

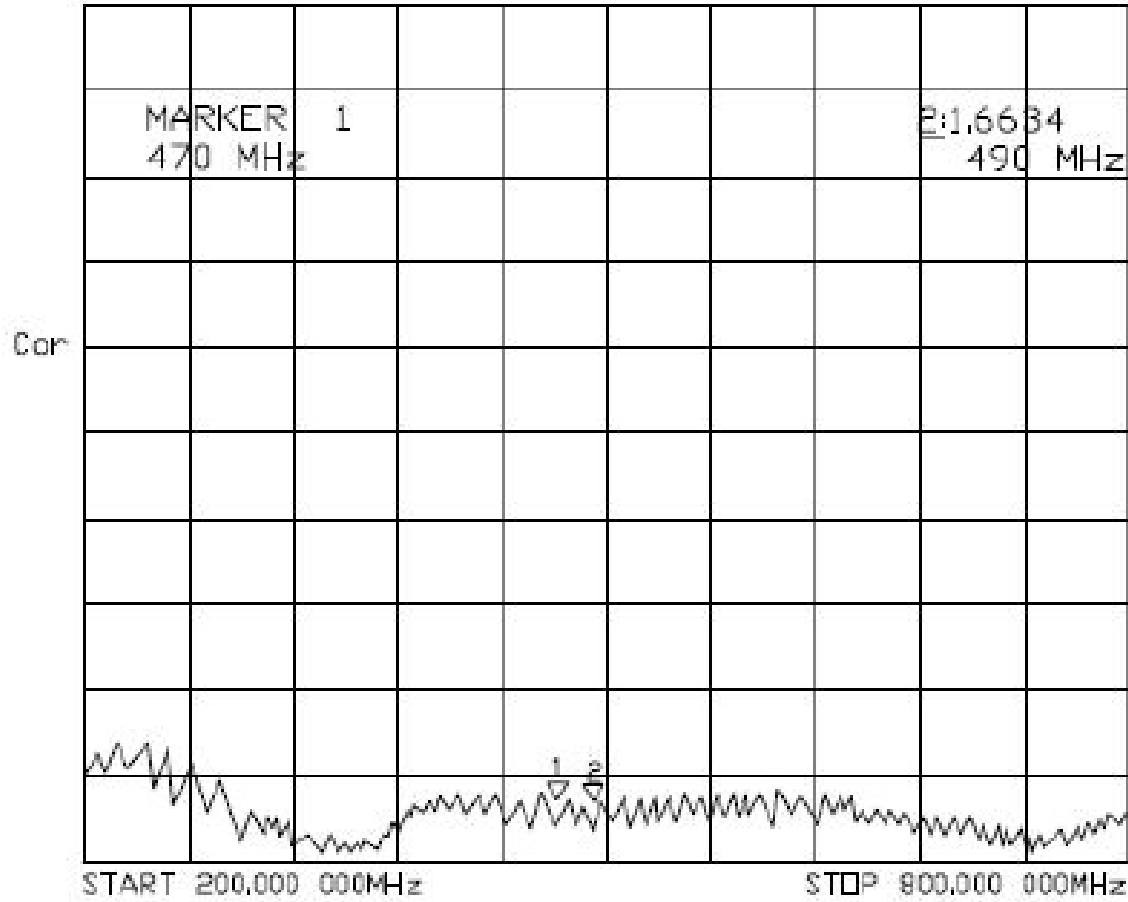

May, 2016