
US3A THRU US3M

Surface Mount Ultra Fast Rectifiers

Features

- Low profile package
- Ideal for automated placement
- Glass passivated chip junctions
- Fast switching for high efficiency
- High forward surge capability
- High temperature soldering:
  260℃/10 seconds at terminals
- Component in accordance to
  RoHS 2002/95/1 and WEEE 2002/96/EC



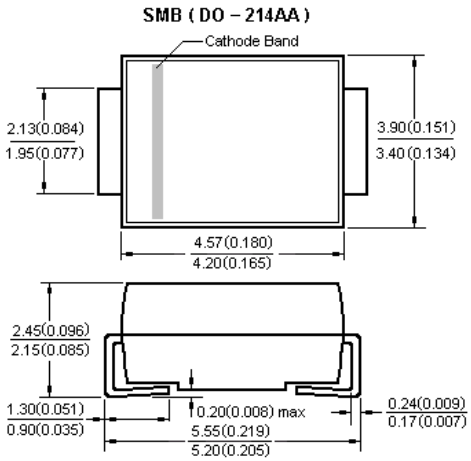

Dimentsions in millimeters and (inchs)

Mechanical Date

- **Case:** JEDEC DO-214AA molded plastic body over glass passivated chip
- **Terminals:** Solder plated, solderable per J-STD-002B and JESD22-B102D
- **Polarity:** Laser band denotes cathode end

Maximum Ratings and Electrical Characteristics Rating at 25℃

ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%

Type Number	SYMBOL	UF3A	UF3B	UF3D	UF3G	UF3J	UF3K	UF3M	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Average Rectified Output Current @T_L =90℃	$I_{F(AV)}$	3.0							A
Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	80							A
Forward Voltage @IF=3.0A	V_{FM}	1.0			1.3	1.7			V
Peak Reverse Current @T_A =25℃	I_R	3.0							uA
At Rated DC Blocking Voltage @T_A =125℃		100							
I^2t Rating for Fusing (t < 8.3ms)	I^2t	26.56							A^2s
Maximum Reverse Recovery Time (Note 1)	Trr	50				75			ns
Typical Junction Capacitance (Note 2)	C_J	28							pF
Typical Thermal Resistance Junction to Ambient(Note 3)	$R_{\theta JA}$	20							℃/W
Operating Temperature Range	T_J	-55 to+150							℃
Storage Temperature Range	T_{STG}	-55 to +150							℃

Note: 1.Reverse Recovery Test Conditions:IF=0.5A,IR=1.0A,IRR=0.25A.
2. Measured at 1.0 MHz and Applied reverse Voltage of 4.0V D.C
3. 8.0MM² (.013mm Thick) Land Areas.

http://www.trr-jx.com Download from alldatasheet.com 广东钜兴电子科技有限公司 GUANGDONG JUXING ELECTRONICE TECHNOLOGY., LTD

Characteristic Curves (T_A=25 ℃ unless otherwise noted)

FIG.1MAXIMUM AVERAGE FORWARD CURRENT DERATING

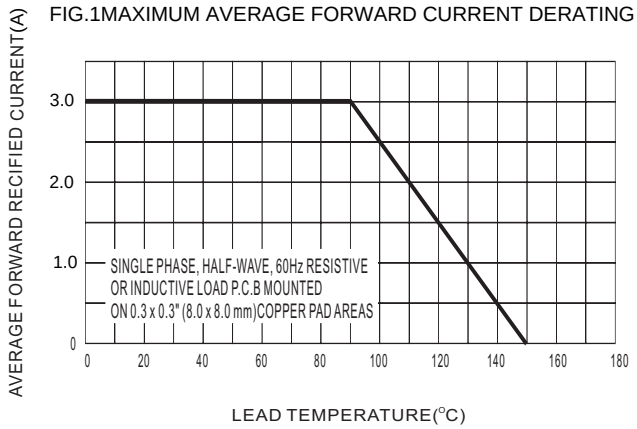


FIG.2TYPICAL FORWARD CHARACTERISTICS

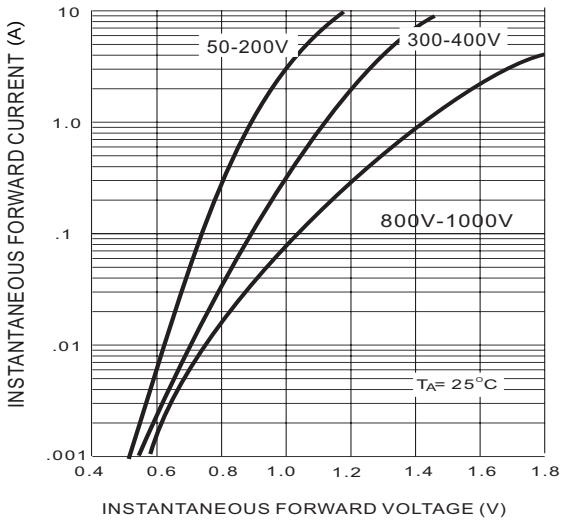


FIG.3MAXIMUM NON-REPEITIVE SURGE CURRENT

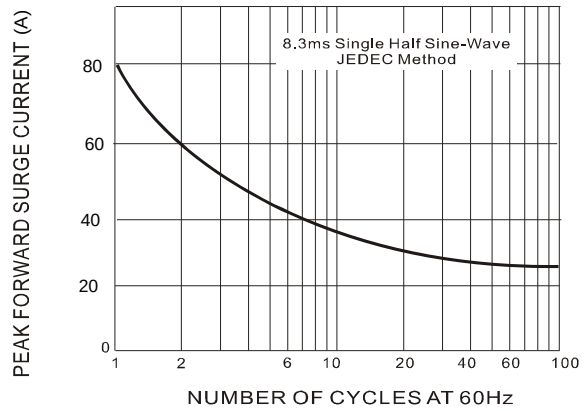


FIG.4TYPICAL JUNCTION CAPACITANCE

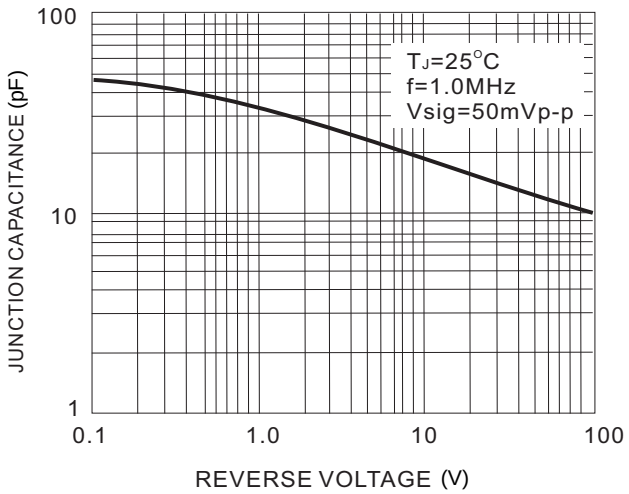


FIG.5TYPICAL REVERSE CHRACTERISTICS


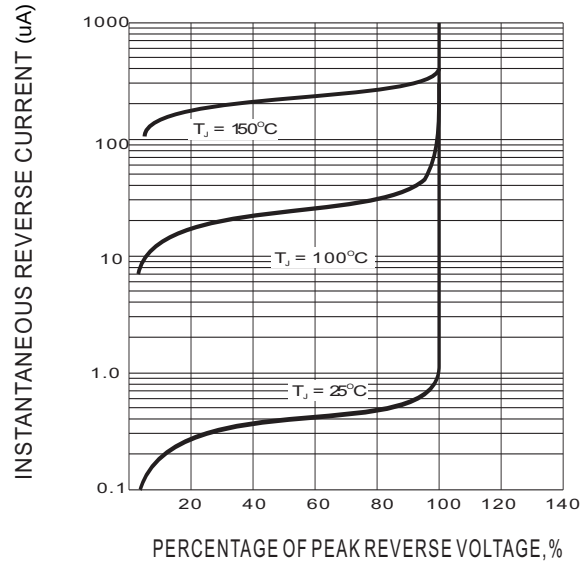


FIG.6 MOUNTING PAD LAYOUT

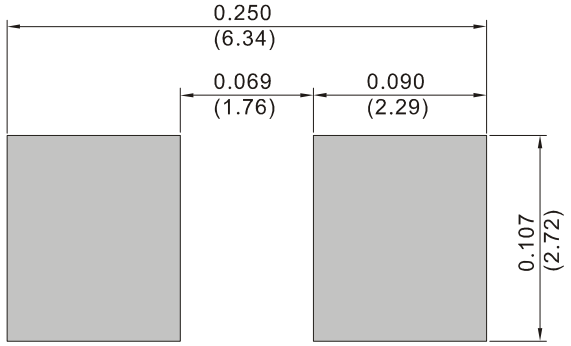

Download from alldatasheet.com