


1. Mechanical Dimensions:

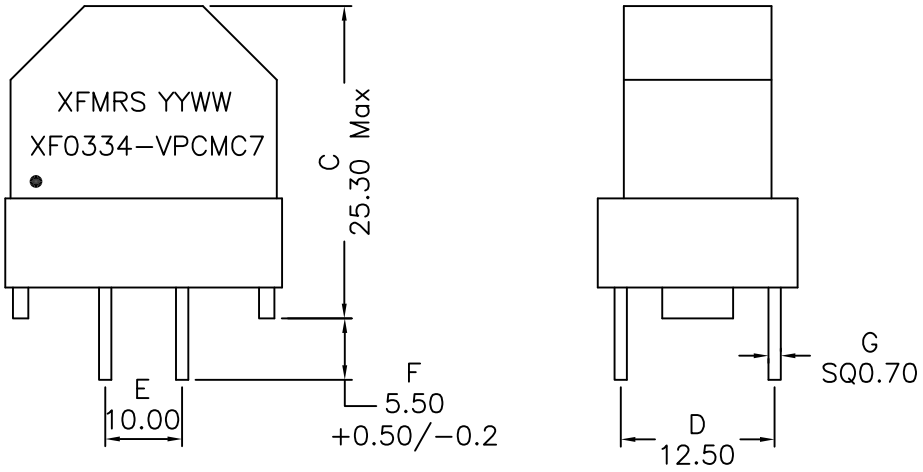

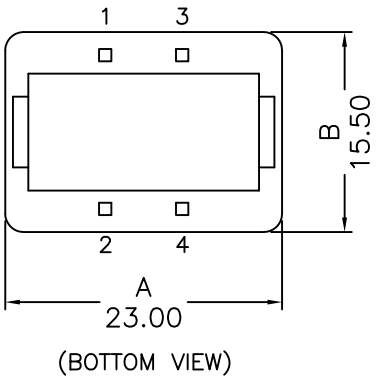

(BOTTOM VIEW)

2. Schematic:

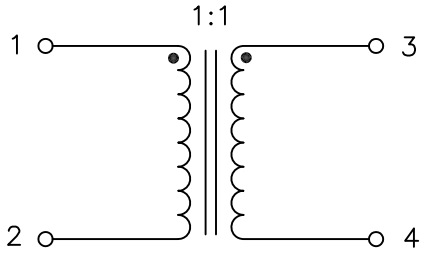

3. Electrical Specifications:

OCL: 3.3mH±30% @10KHz 0.1V, Each Wdg

Q: tbd Min @10KHz 0.1V

DCR: 70mOhms ±20%, Each Wdg

Rated RMS Current: 2.5 Amps Max

SRF: 700KHz

Hipot: 1500VAC Wdg. to Wdg. for 60 Secs

Rated Voltage: 250VAC

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +125°C unless otherwise noted.
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC. REV: A/-

XFMRS Inc. www.XFMRS.com	Title: COMMON MODE EMI SUPPRESSION INDUCTOR		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM	P/N: XF0334-VPCMC7		REV. A
	DWN.	Feng	Mar-03-14
	CHK.	YK Liao	Mar-03-14
SHEET 1 OF 1	APP.	DDC	Mar-03-14

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.