EA2015 Series 13.5 Watts Dual Output Switching Adapter

FEATURES



- ●Cispr 22'B', Vcci'B', Fcc'B' Compliance
- ●Compact Size
- ●Over-Voltage Protective Installation
- ●Short-circuit Protective Installation
- ●Protection Type: Auto-Recover
- ●IEC-320 Receptacle 2P

SPECIFICATION

Item \ Model	EA2015A	EA2015B
Input Voltage	AC 90~264V	
Input Frequency	47~63Hz	
Input Current	0.5A Maximum	
Inrush Current	50A Maximum	
Efficiency	60% Typical	
Temperature Coefficient	0.05%/℃	
Hold-Up Time	10ms Minimum	
Over-Voltage Protection	7.0V Maximum (5V Output)	
Operating Temperature	0~40℃	
Storage Temperature	-20~85℃	
Weight	200g/7.2oz	
Safety Description	UL, CUL, TUV, CE	

(∗): Under Development (I/P): In Process

Bothhand USA. e-mail: sales@bothhandusa.com http://www.bothhand.com


462 Boston St - Topsfield, MA 01983 - Phone: 978-887-8050 - Fax: 978-887-5434

ORDERING INFORMATION

EA2015 [A] - [D3]

- D3 — Output Plug List
- A — Outputs (A or B)

MECHANICAL

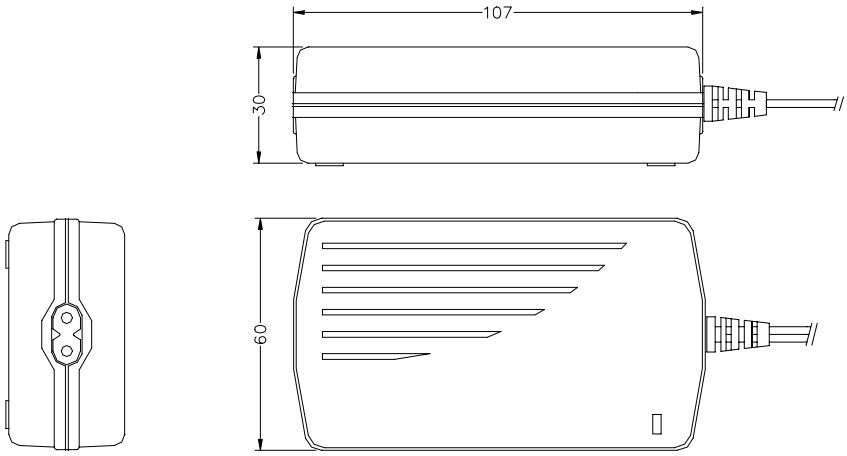

Unit: m.m.

OUTPUTS

Model No.	Vo	Load			Regulation		Tolerance	Ripple & Noise
		Min.	Rated	Surge	Line	Load		
EA2015A	Vo1 +3.3V	0.0A	2.5A	---	1.0%	6.0%	± 6.0%	50mV
	Vo2 +5V	0.0A	1.0A	---	1.0%	5.0%	± 5.0%	60mV
EA2015B	Vo1 +5V	0.0A	1.5A	---	1.0%	5.0%	± 5.0%	60mV
	Vo2 +12V	0.0A	0.5A	---	1.0%	5.0%	± 5.0%	120mV

Standard Output Cable:
20AWG, UL 2464/3C/Shielding, 1200mm

Bothhand USA. e-mail: sales@bothhandusa.com http://www.bothhand.com
462 Boston St - Topsfield, MA 01983 - Phone: 978-887-8050 - Fax: 978-887-5434