


used for: D-SUB

POS.	A -0.76	B -0.25	C	Part NO.
9	31.19	16.46	$25.00^{+0.12}_{-0.13}$	164A10019X
15	39.52	24.79	$33.30^{+0.15}_{-0.1}$	164A10029X
25	53.42	38.50	47.04 ± 0.13	164A10039X
37	69.70	54.96	63.50 ± 0.13	164A10049X

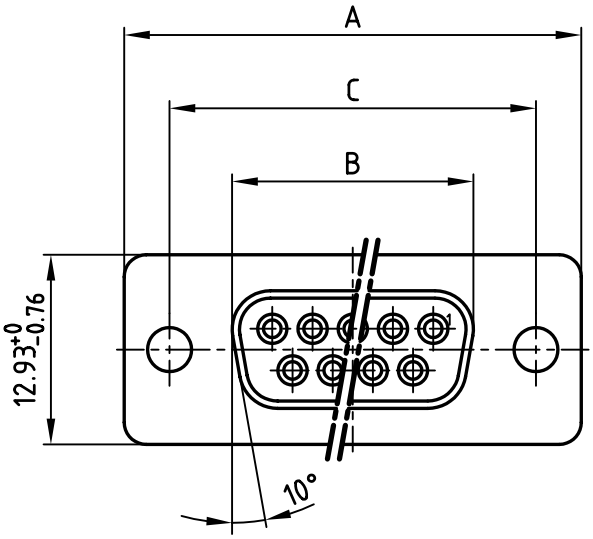

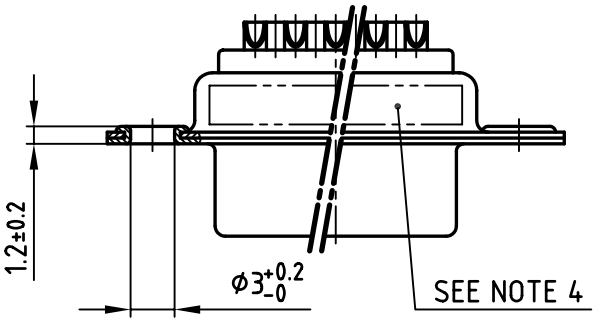

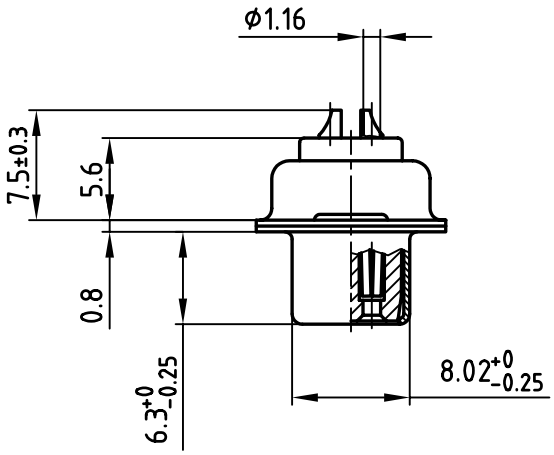

Directive 2002/95/EC „RoHS“ Compliant

APPROVAL ✱ FREIGABE ✱ DEBLOCAGE ✱ AUTOR/ZACION ✱ APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL ✱ FREIGABE ✱ DEBLOCAGE ✱ AUTOR/ZACION ✱ APPROVAL

(b) NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
   PLATING: 8µin HARD GOLD OVER min. 50µin NICKEL
   SOLDER CUP ACCEPTS CABLE AWG 20
4. CONNECTOR IS PART MARKED: PART-NO. CONEC ABC

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
1 x b	Ä 2535	18.07.2006	Lehmen.
a	Origin		

tolerance

dim. in mm

	date	name
1998		
drawn	25.08.	Barcinski
appd.	25.08.	Mickenbecker
norm	DIN 41652	
d-old		

CONEC®

scale: 2:1

material: SEE NOTES

title:

D-SUB FEMALE

9-37pos. SOLDER CUP

dwg no: 16K11FWA

AutoCAD 2006

DIN-A 4

sh: 1/1

part no: SEE TABLE