

NOTES:

MATERIAL

- 1. Insulator Material: PBT+30%GF(UL94V-0), Black
- 2. Contact Material : Brass
- 3. Contact Plating : Sn Over Ni

ELECTRICAL

- 1. Current Rating : 3.0AMP
- 2. Withstand Voltage : 1000V AC/DC
- 4. Contact Resistance : 20mΩ max
- 5. Insulation Resistance: 1000MΩ min

ENVIRONMENTAL

- 1. Operation Temperature: -40°C to +105°C
- 2. Packing : Tray

Order Information(2.54x7.62):
contacts xx : 08,10,14,16,18,20

RoHS compliant

Scale	1:1	Date	25.01.2006	Name	Alex	Customer-No.		
TOLERANCE		Drawn	25.01.2006	Name	Alex	ASSMANN WSW-No. ADIP xx Z-LC		
X.X	±0.40	④ Add sheet 2	21.01.2010	Dean	Approved		21.01.2010	Hellwig
X.XX	±0.25	③ Modify drawing	28.12.2009	Dean				
X.XXX	±0.15	② Update	02.07.2009	Dean				
Angle	±3°	① Drawn	25.01.2006	Alex				
		Id.	Modification	Date	Name			



Drawing-No.		ASS 2320 CO	rev04
Replace			

1

2

3

4

5

6

7

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H

H

NOTES:**MATERIAL**

- 1. Insulator Material: PBT+30%GF(UL94V-0), Black
- 2. Contact Material : Brass
- 3. Contact Plating : Sn Over Ni


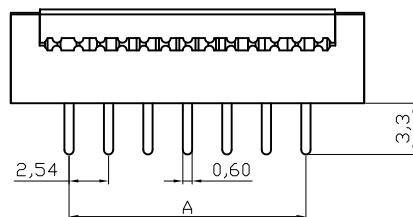
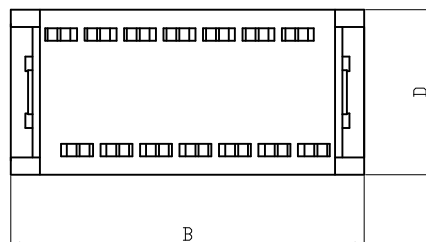
ELECTRICAL

- 1. Current Rating : 1.0AMP
- 2. Withstand Voltage : 500V AC/DC
- 4. Contact Resistance : 30mΩ max at 1 AMP DC.
- 5. Insulation Resistance: 1000MΩ at 500 VDC

ENVIRONMENTAL

- 1. Packing : Tray

Order Information(2,54x15,24);
contacts xx : 24,28,40

**Dimensions (Pitch=15.24mm)**

Positions	A	B	C	D
24	27.94	35.74	15.24	18.22
28	33.02	40.82	15.24	18.22
40	48.26	56.06	15.24	18.22

RoHS compliant

Scale	1:1	Date	25.01.2006	Name	Alex	Customer-No.	
TOLERANCE		Drawn					
X.	±0.38	④ Add sheet 2	21.01.2010	Dean	Approved	21.01.2010	Hellwig
X.X	±0.25	③ Modify drawing	28.12.2009	Dean			
X.XX	±0.13	② Update	02.07.2009	Dean			
Angle		① Drawn	25.01.2006	Alex			
X°	±3°						
X.X°	±1°						
		Id.	Modification	Date	Name		

Drawing-No.
ASS 2320 CO rev04

Replace
Sheet 2/2

1

2

3

4

5

6

7