




- Solid Base for Stable Mounting
- Excellent EMI Suppression
- Fixed Pins for easy PCB Insertion
- Operating temp: -40°C to +125°C

Electrical Specifications @25°C


Part Number	Inductance 100KHz/0.5mA 1-4 = 2-3	DCR CH-502A 1-4 = 2-3	RDC (IR)	HI-POT TEST Coil to Coil 1500V for 2 sec.	Operation Voltage	Wire 1-4 / 2-3	Turns 1-4 / 2-3
VCMB744826-501N	0.5mH Min	2.3mOhm Max	35A Max	5mA	250VAC	2.50Ø1PEW	7 TS (REF)

All specifications subject to change without notice.

MECHANICAL

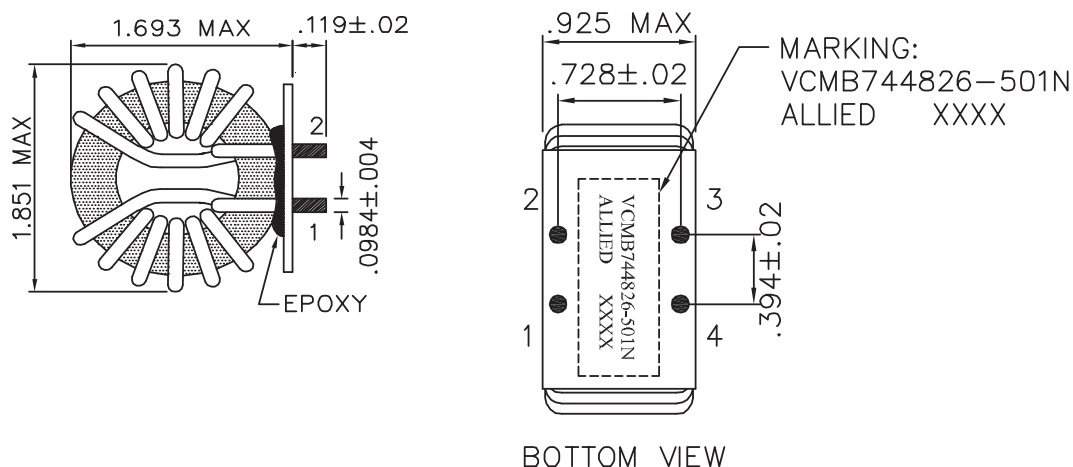

SCHEMATICS

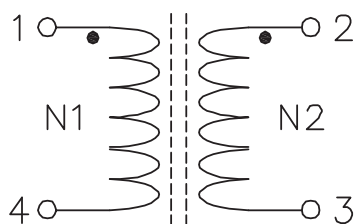

● START