http://www.usakro.com

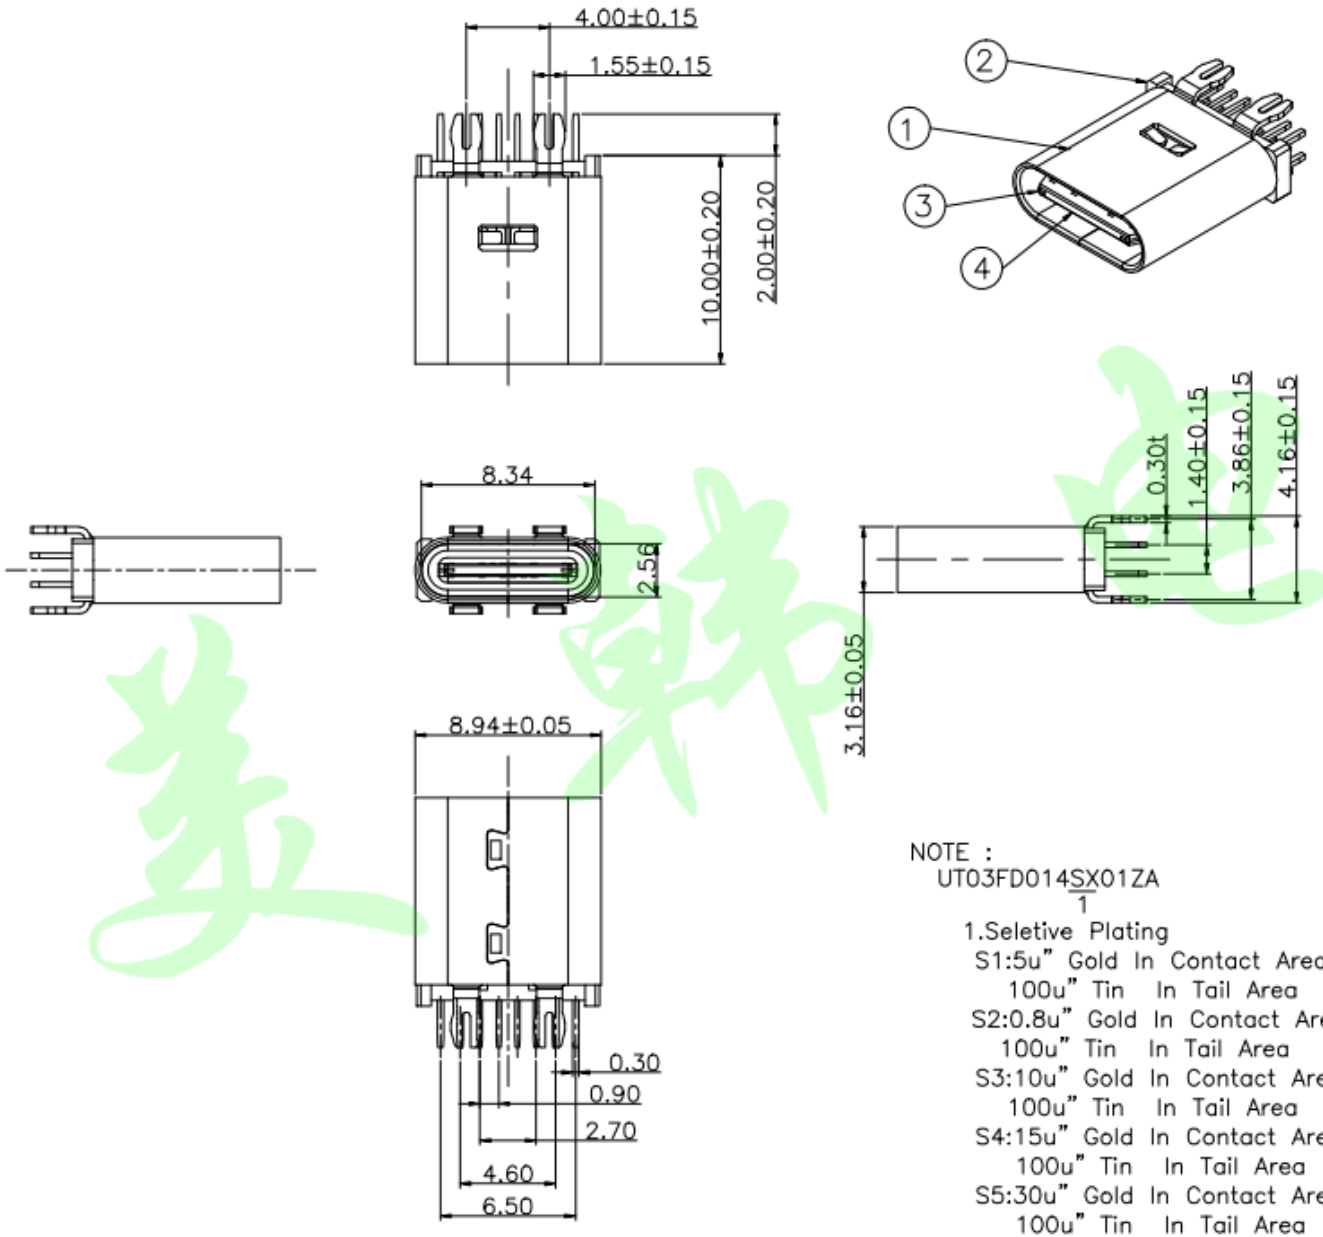



A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B7	DN2
A6	DP1	B6	DP2
A7	DN1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

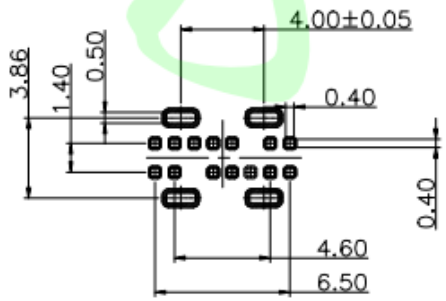

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

NOTE :
UT03FD014SX01ZA
1
1.Seletive Plating
S1:5u" Gold In Contact Area
100u" Tin In Tail Area
S2:0.8u" Gold In Contact Area
100u" Tin In Tail Area
S3:10u" Gold In Contact Area
100u" Tin In Tail Area
S4:15u" Gold In Contact Area
100u" Tin In Tail Area
S5:30u" Gold In Contact Area
100u" Tin In Tail Area

NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
7				
6				
5				
4	TYPE C MD	HIGH TEMP	BLACK	UL 94V-0
3	CENTER PIECE	STAINLESS STEEL	——	NO Plated
2	TYPE C TERMINAL	COPPER ALLOY	——	Gold Plated
1	SHELL	STAINLESS STEEL	——	Ni Plated

东莞市美韩电子科技有限公司
Dongguan Usakro Electronic Technology Co., Ltd.

ECN(DCN) NO.	REV.	DESCRIPTION	DATE	CHANGE	APPRO.
——	PA	NEW	17-08-30	LUI	JUAN

GENERAL TOLERANCE UNLESS OTHERWISE NOTED	
30~	±0.50
10~ 30	±0.30
~ 10	±0.15
ANGLES	±2°

DRAW	
DESIGN	
CHECK	
APPRO.	

PART NO.	UT03FD014SX01ZA						
DRAW NAME	TYPE C 2.0母座 14PIN 180度插板（10.0mm）						
DRAW NO.	TYPE-C-14M-015-100					REV.	PA
UNIT	mm	SCALE	1:1	PAGE	1of1	VIEW	