

MMBT918W

VHF/UHF NPN SILICON TRANSISTOR

VOLTAGE 15 Volts **POWER** 225 mWatts


SOT-323 Unit: inch (mm)

FEATURES

- NPN silicon
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: SOT-323, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 5 mg
- Marking: R1B

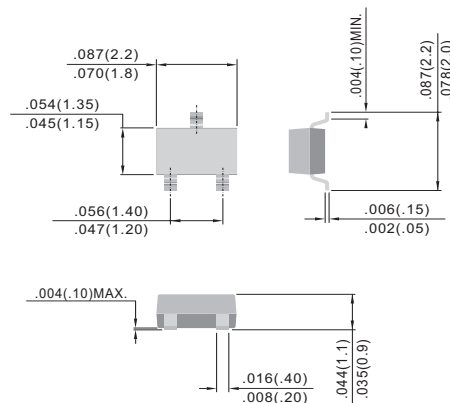

ABSOLUTE RATINGS

PARAMETER	Symbol	Value	Units
Collector - Emitter Voltage	V_{CEO}	15	V
Collector - Base Voltage	V_{CBO}	30	V
Emitter - Base Voltage	V_{EBO}	3.0	V
Collector Current - Continuous	I_C	50	mA

THERMAL CHARACTERISTICS

PARAMETER	Symbol	Value	Units
Total Device Dissipation (Note1) $T_A=25^{\circ}\text{C}$ Derate above 25°C	P_D	225 1.8	mW mW/ $^{\circ}\text{C}$
Thermal Resistance , Junction to Ambient	$R_{\theta JA}$	556	$^{\circ}\text{C/W}$
Junction and Storage Temperature	T_J, T_{STG}	-55 to 150	$^{\circ}\text{C}$

Note 1: FR.4 = 70 x 60 x 1mm.

MMBT918W

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Test Condition	MIN.	MAX.	Units
OFF CHARACTERISTICS					
Collector - Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=3.0mA, I_B=0$	15	-	V
Collector - Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=1.0\mu A, I_E=0$	30	-	V
Emitter - Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	3.0	-	V
Collector Cutoff Current	I_{CBO}	$V_{CB}=15V, I_E=0$	-	50	nA
ON CHARACTERISTICS					
DC Current Gain	h_{FE}	$I_C=3.0mA, V_{CE}=1.0V$	20	-	-
Collector - Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=10mA, I_B=1.0mA$	-	0.4	V
Base - Emitter Saturation Voltage	$V_{BE(SAT)}$	$I_C=10mA, I_B=1.0mA$	-	1.0	V
SMALL-SIGNAL CHARACTERISTICS					
Current Gain Bandwidth Product	f_T	$I_C=4.0mA, V_{CE}=10V, f=100MHz$	600	-	MHz
Output Capacitance	C_{obo}	$V_{CB}=0V, I_E=0, f=1.0MHz$ $V_{CB}=10V, I_E=0, f=1.0MHz$	- -	3.0 1.7	pF
Input Capacitance	C_{ibo}	$V_{EB}=0.5V, I_C=0, f=1.0MHz$	-	2.0	pF





Fig.34

MMBT918W

MOUNTING PAD LAYOUT

SOT-323

Unit: inch (mm)

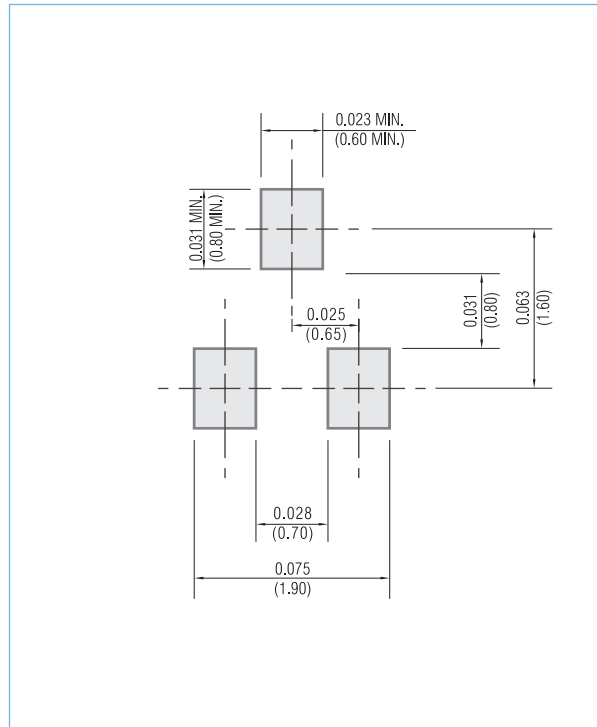

ORDER INFORMATION

- Packing information
 - T/R - 12K per 13" plastic Reel
 - T/R - 3K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2009

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.