
01 0132

DIN circular connectors




DIN plug, straight version, shielded, with bayonet lock, metal housing, bend protection and solder terminals


01 0132

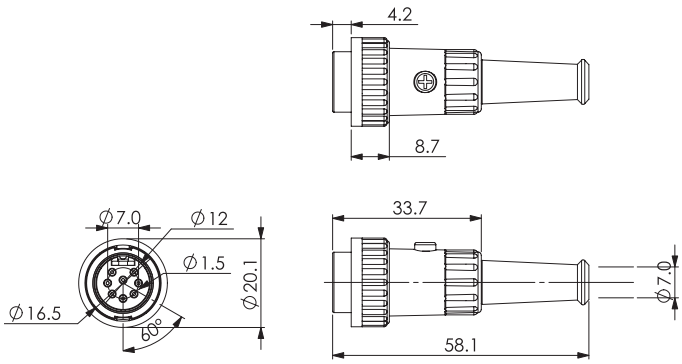

DIN 41524




0132 03




0132 04

DIN 41524




0132 05

DIN 45322




0132 05-1

DIN 45322




0132 06

DIN 45329



0132 07-1

DIN 45326



0132 08-1

Environmental conditions

Temperature range	-20 °C/+85 °C

Materials

Insulating body	ABS, V-0 according to UL94
Contact pin	CuZn, silver-plated
Strain relief	steel, nickel-plated
Housing	Zn alloy, nickel-plated
Bayonet nut	Zn alloy, nickel-plated
Bend protection sleeve	PVC
Screw	steel, nickel-plated

Connectable conductors for solder area

Section	≤ AWG 18 (0,75 mm²)
Cable diameter	7,0 mm

Electrical data (at T_{amb} 20 °C)

Rated current	≤ 4 A
Rated voltage	60 V AC
Rated impulse voltage	250 V AC RMS/60 s
Insulation resistance	≥ 100 MΩ

Associated products

Counterparts

0107 0122

01 0132

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
0132 03	3	50	150
0132 04	4	50	150
0132 05	5	50	150
0132 05-1	5	50	150
0132 06	6	50	150
0132 07-1	7	50	150
0132 08-1	8	50	150

Packaging:
in individual plastic bags, in a cardboard box