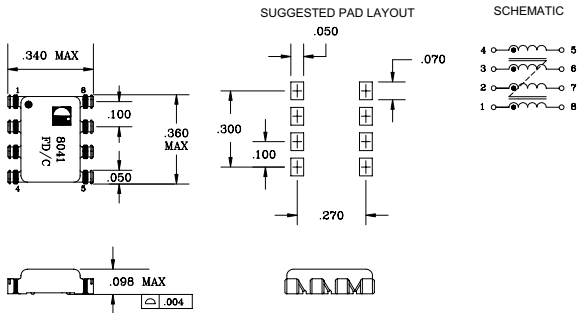


- 4 Line Common Mode Choke
- Reduce radiated EMI emissions
- Filters common mode noise for EMI reduction
- Common mode attenuation from 100 kHz to 500 MHz
- 500 Vrms Isolation
- PCMCIA package


MECHANICAL AND SCHEMATIC (All dimensions in inches)

 UNLESS OTHERWISE SPECIFIED, ALL TOLERANCES ARE ± 0.010
ELECTRICAL SPECIFICATION @ 25°C

Turns Ratio ($\pm 5\%$)	OCL (μH MIN)	L_s (μH MAX)	DCR (Ω MAX)	C_{WV} (pF MAX)	Common Mode Attenuation (dB TYP)							
					100kHz	1MHz	10MHz	30MHz	50MHz	100MHz	300MHz	500MHz
1:1:1:1	47	0.20	0.30	16	3	19	32	36	35	29	12	6