



TOLERANCE UNLESS SPECIFIED =

.XXX = +/- .005


.XX = +/- .015

FRACTIONS = +/- .032

36-070.DC2

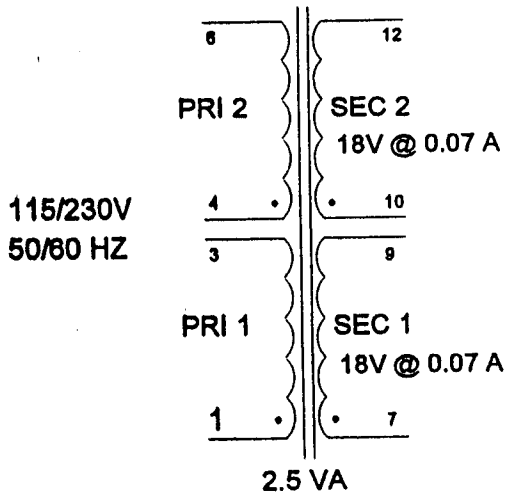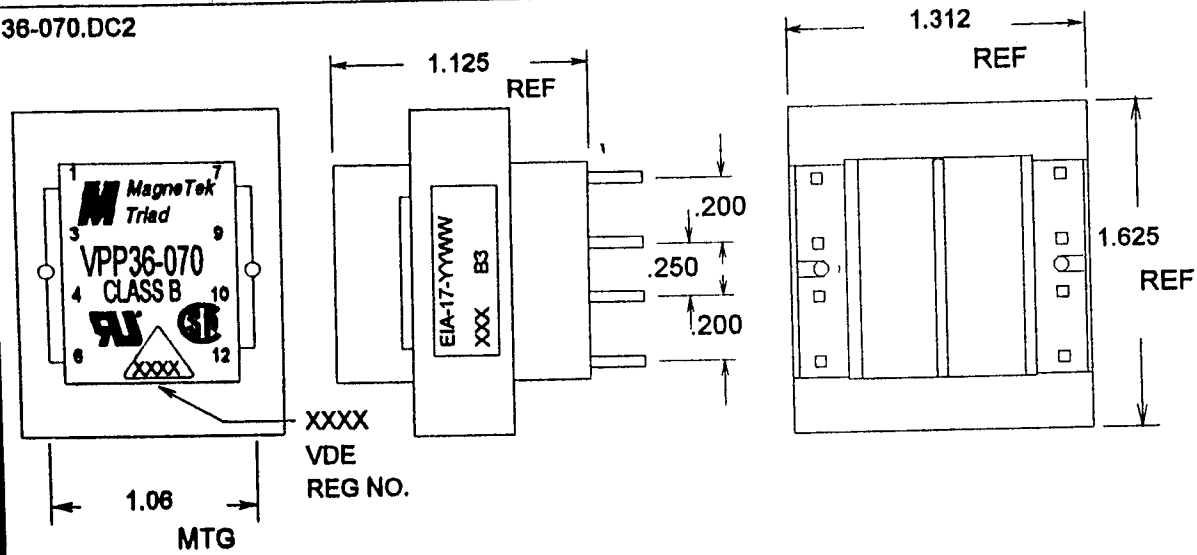

PC PINS .025 SQ

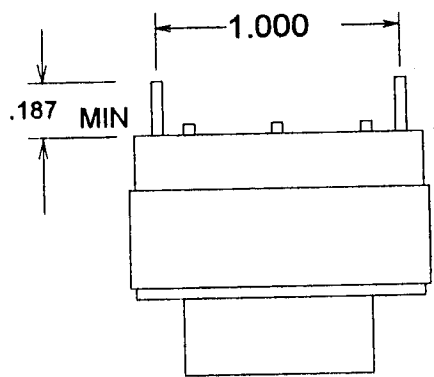

PRODUCTION TESTS

DC RESISTANCE IN OHMS	TURNS RATIO = 100% 1-3 = 723 NOM 4-6 = 902 NOM 7-9 = 38 NOM 10-12 = 46.5 NOM
------------------------------	--

MAX EXCITATION CURRENT = 0.008 A
APPLY 230V 60HZ 1-6 (3+4)
 PRI WDGS 114.5 TO 115.5 V
 SEC WDGS 23.7 TO 24.9 V

HIPOT: 4000V P-S
 4000V P,S, TO CORE
 600 V P-P, S-S

CONTINUITY = 100% PRI'S IN FINAL

FINAL ASSEMBLY NOTES

MagneTek

VPP36-070