


Features

- Large capacitance series.
- Two lead style (bare wire or Insulated lead).

Applications

- Suppressing noise occurring in electric appliances and motors in Germany.

Circuit



Safety Agency : Standard	File No.
VDE : EN60252, VDE0560 Teil 8	126777




VE-A



VE-B


Dimensions

• VE-A

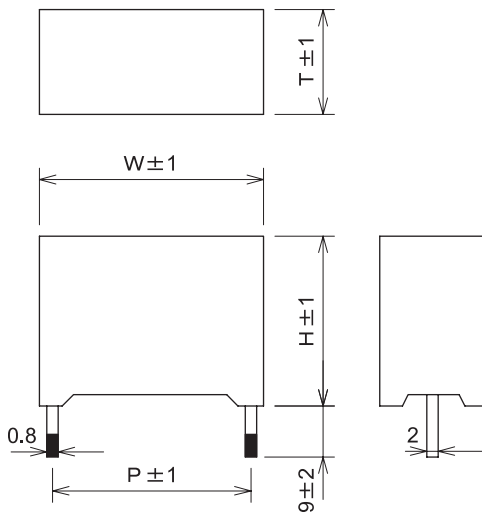

Unit: mm

• VE-B

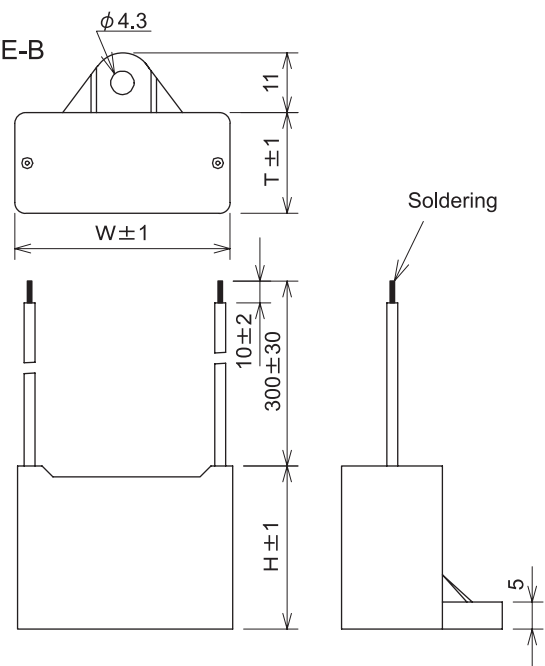

Electrical Specifications

Rated Voltage **250VAC**

Safety Agency	Model Number	Capacitance μF±10%	Dimensions				Dissipation Factor	Test Voltage	Insulation Resistance
			W	H	T	P			
	VE155-A/B	1.5	39.5	30.0	18.5	35.0	0.001max. (at 1kHz)	Line to Line 1075V _{DC} 60sec Line to Ground 2000V _{rms} 50/60Hz 60sec	Line to Line 5000Ω · F _{min} Line to Ground 30000MΩ min (at 500V _{DC})
	VE225-A/B	2.2	39.5	30.0	18.5	35.0			
	VE335-A/B	3.3	49.5	33.0	20.5	45.0			
	VE475-A/B	4.7	59.5	35.5	21.5	55.0			
	VE685-A/B	6.8	59.5	43.5/42.5	30.5	55.0			
	VE106-A/B	10.0	59.5	43.5/42.5	30.5	55.0			

Operating Temperature: -40~+85°C