GI122 NPN EPITAXIAL PLANAR TRANSISTOR


Description


The GI122 is designed for use in general purposes and low speed switching applications.


Features

- High DC current gain
- Built-in a damper diode at E-C

Package Dimensions

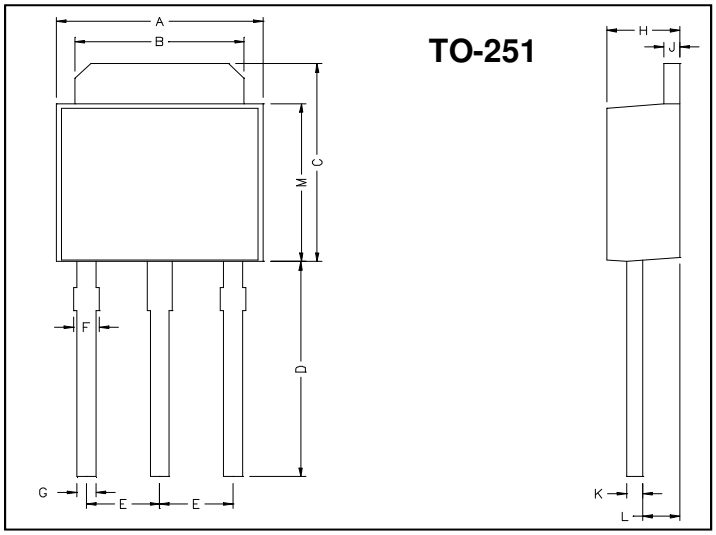





REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	6.40	6.80	G	0.50	0.70
B	5.20	5.50	H	2.20	2.40
C	6.80	7.20	J	0.45	0.55
D	7.20	7.80	K	0.45	0.60
E	2.30 REF.		L	0.90	1.50
F	0.60	0.90	M	5.40	5.80

Absolute Maximum Ratings at Ta = 25℃


Parameter	Symbol	Ratings	Unit
Junction Temperature	Tj	+150	℃
Storage Temperature	Tstg	-55 ~ +150	℃
Collector to Base Voltage	BVCBO	100	V
Collector to Emitter Voltage	BVCEO	100	V
Emitter to Base Voltage	BVEBO	5	V
Collector Current	IC	5	A
Total Power Dissipation(Tc=25℃)	PD	20	W


Electrical Characteristics (Rating at 25℃ ambient temperature unless otherwise specified)


Symbol	Min.	Typ.	Max.	Unit	Test Conditions
BV_{CBO}	100	-	-	V	I_C=1mA, I_E=0
BV_{CEO}	100	-	-	V	I_C=30mA, I_B=0
BV_{EBO}	5	-	-	V	I_E=1mA, I_C=0
I_{CBO}	-	-	10	μA	V_{CB}=100V, I_E=0
I_{CEO}	-	-	10	μA	V_{CE}=50V, I_B=0
I_{EBO}	-	-	2	mA	V_{EB}=5V, I_C=0
*$V_{CE(sat)}$1	-	-	2	V	I_C=3A, I_B=16mA
*$V_{CE(sat)}$2	-	-	4	V	I_C=5A, I_B=20mA
*$V_{BE(sat)}$	-	-	4	V	I_C=5A, I_B=50mA
*$V_{BE(on)}$	-	-	2.5	V	V_{CE}=3V, I_C=3A
*h_{FE}1	1	-	-	K	V_{CE}=3V, I_C=500mA
*h_{FE}2	1	-	-	K	V_{CE}=3V, I_C=3A
Cob	-	-	200	pF	V_{CB}=10V, f=1MHz


* Pulse Test: Pulse Width≦380μs, Duty Cycle≦2%


Characteristics Curve

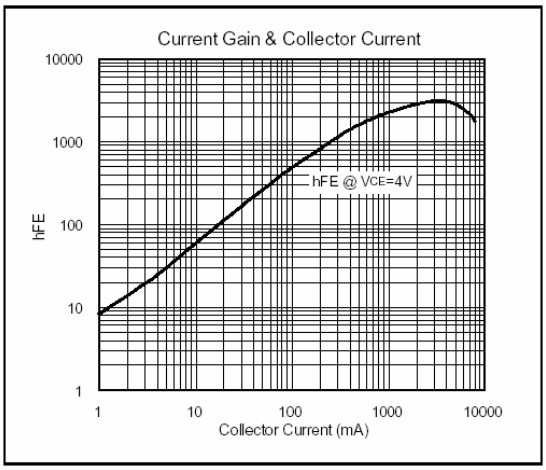


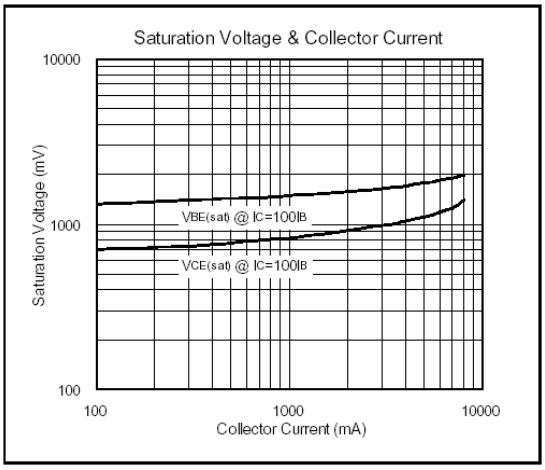


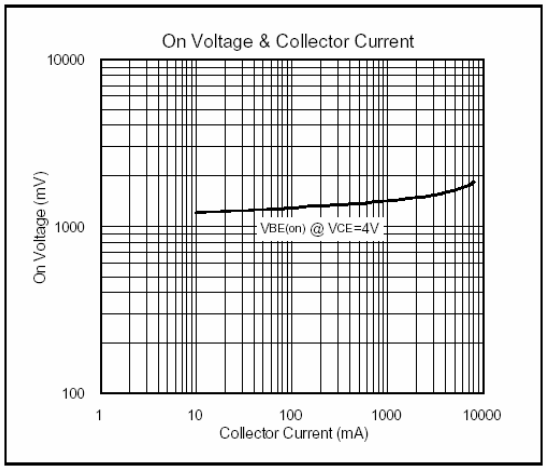

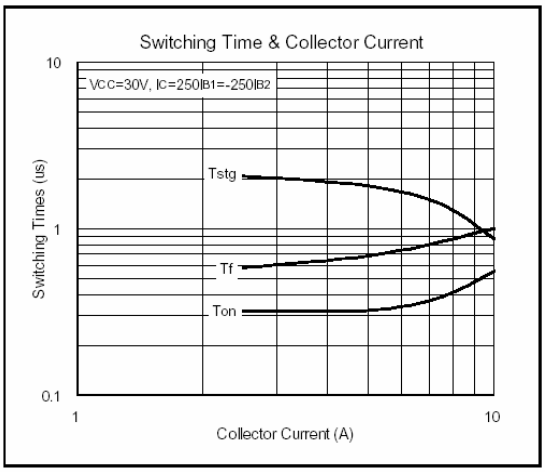

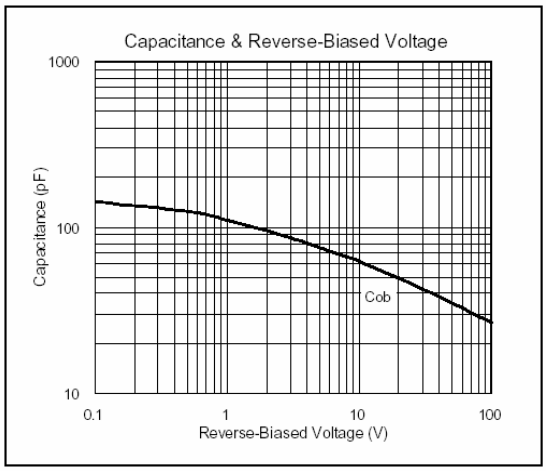

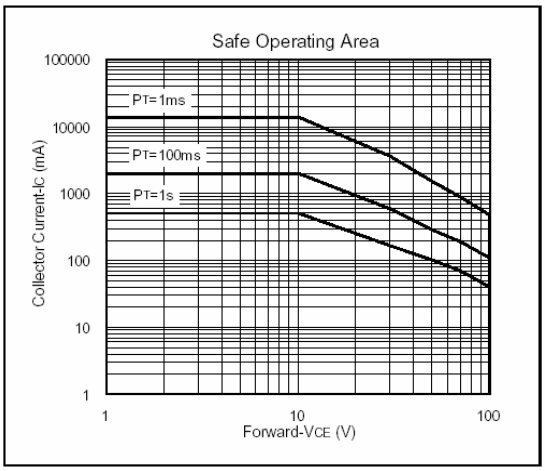

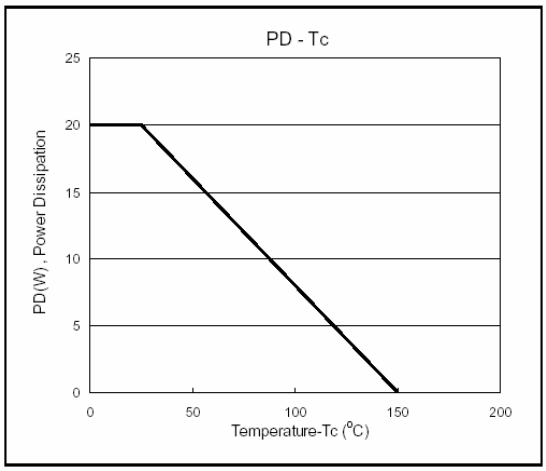

Important Notice:
- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:
- **Taiwan**: No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
  TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China**: (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
  TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165