

MMSZ4685-MMSZ4717

SILICON PLANAR ZENER DIODES

Features

- RoHS compliant package


Packing & Order Information

3,000/Reel




RoHS
COMPLIANT

SOD-123FL

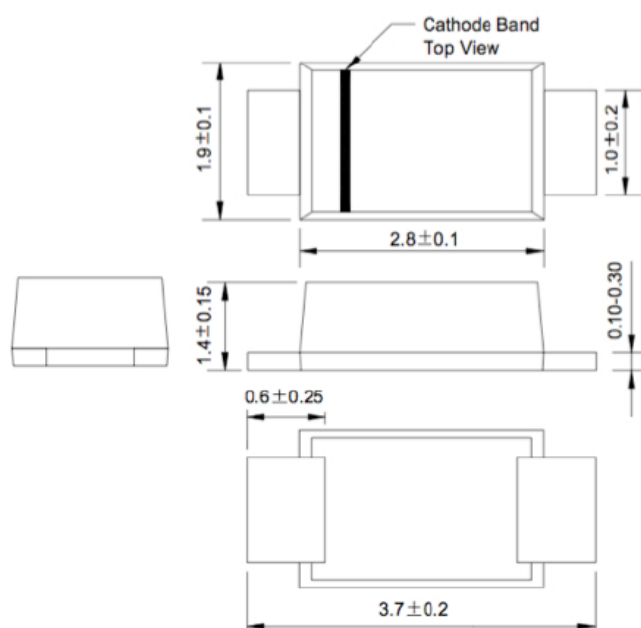

Graphic symbol



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Maximum Ratings and Thermal Characteristics (Ta=25°C)

Symbol	Parameter	Value	Unit
*P _{tot}	Power Dissipation at TL=75°C	500	mW
T _J	Junction Temperature Range	150	°C
T _{stg}	Storage Temperature Range	-65 to +150	°C

*FR-4 or FR5 board with minimum recommended solder pad layout

Maximum Ratings and Thermal Characteristics (Ta=25°C)

Symbol	Parameter	Value	Unit
*R _{th} (j-a)	Thermal Resistance Junction to Ambient Air	340	°C/W

MMSZ4685-MMSZ4717

SILICON PLANAR ZENER DIODES

ELECTRICAL CHARACTERISTICS (Ta=25°C unless specified otherwise)

Type	Zener VoltageVZ (V) at IZT=50mA			Max Reverse LeakageCurrent	Test Voltage	Marking Code
	Nom	Min	Max	IR	VR	
	V	V	V	μA	V	
MMSZ4685	3.6	3.42	3.78	7.5	2.0	CM
MMSZ4686	3.9	3.71	4.10	5.0	2.0	CN
MMSZ4687	4.3	4.09	4.52	4.0	2.0	CP
MMSZ4688	4.7	4.47	4.94	10	3.0	CT
MMSZ4689	5.1	4.85	5.36	10	3.0	CU
MMSZ4690	5.6	5.32	5.88	10	4.0	CV
MMSZ4691	6.2	5.89	6.51	10	5.0	CA
MMSZ4692	6.8	6.46	7.14	10	5.1	CX
MMSZ4693	7.5	7.13	7.88	10	5.7	CY
MMSZ4694	8.2	7.79	8.61	1.0	6.2	CZ
MMSZ4695	8.7	8.27	9.14	1.0	6.6	D
MMSZ4696	9.1	8.65	9.56	1.0	6.9	D
MMSZ4697	10	9.50	10.50	1.0	7.6	DE
MMSZ4698	11	10.50	11.60	0.05	8.4	DF
MMSZ4699	12	11.40	12.60	0.05	9.1	DH
MMSZ4700	13	12.40	13.70	0.05	9.8	DJ
MMSZ4701	14	13.30	14.70	0.05	10.6	DK
MMSZ4702	15	14.30	15.80	0.05	11.4	DM
MMSZ4703	16	15.20	16.80	0.05	12.1	DN
MMSZ4704	17	16.20	17.90	0.05	12.9	DP
MMSZ4705	18	17.10	18.90	0.05	13.6	DT
MMSZ4706	19	18.11	20.00	0.05	14.4	DU
MMSZ4707	20	19.00	21.00	0.01	15.2	DV
MMSZ4708	22	20.90	23.10	0.01	16.7	DA
MMSZ4709	24	22.80	25.20	0.01	18.2	DZ
MMSZ4710	25	23.80	26.30	0.01	19.0	DY
MMSZ4711	27	25.70	28.40	0.01	20.4	EA
MMSZ4712	28	26.60	29.40	0.01	21.2	EC
MMSZ4713	30	28.50	31.50	0.01	22.8	ED
MMSZ4714	33	31.40	34.70	0.01	25.0	EE
MMSZ4715	36	34.20	37.80	0.01	27.3	EF

MMSZ4685-MMSZ4717

SILICON PLANAR ZENER DIODES


ELECTRICAL CHARACTERISTICS (Ta=25°C unless specified otherwise)

Type	Zener VoltageVZ (V) at IZT=50mA			Max Reverse LeakageCurrent	Test Voltage	Marking Code
	Nom	Min	Max	IR	VR	
	V	V	V	μA	V	
MMSZ4716	39	37.10	41.00	0.01	29.6	EH
MMSZ4717	43	40.90	45.20	0.01	32.6	EJ


Notes :

(1) Vz is tested with pulses (20 ms).

(2) Zz is measured at Iz by given a very small A.C. current signal.

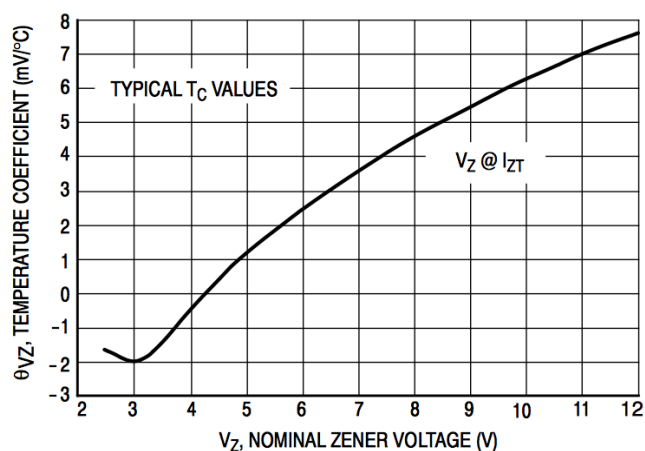

**Figure 1. Temperature Coefficients
(Temperature Range -55°C to +150°C)**

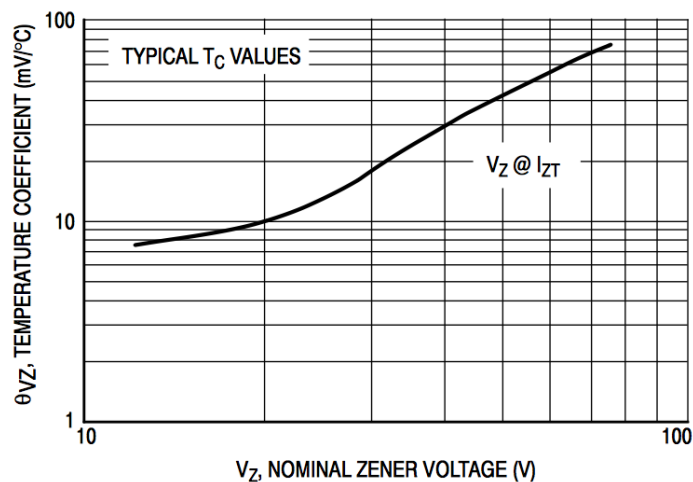

**Figure 2. Temperature Coefficients
(Temperature Range -55°C to +150°C)**

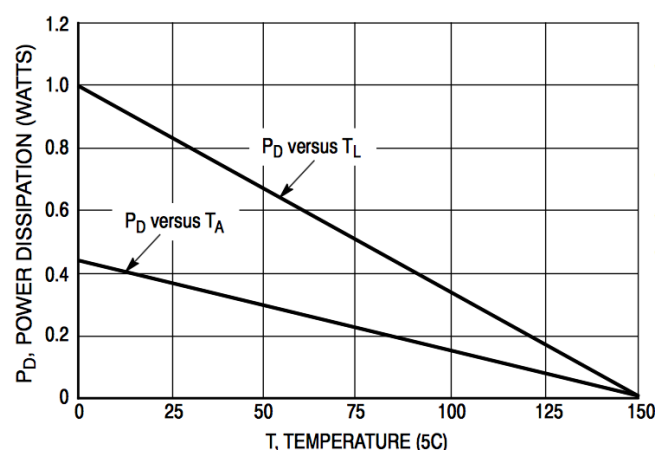


Figure 3. Steady State Power Derating


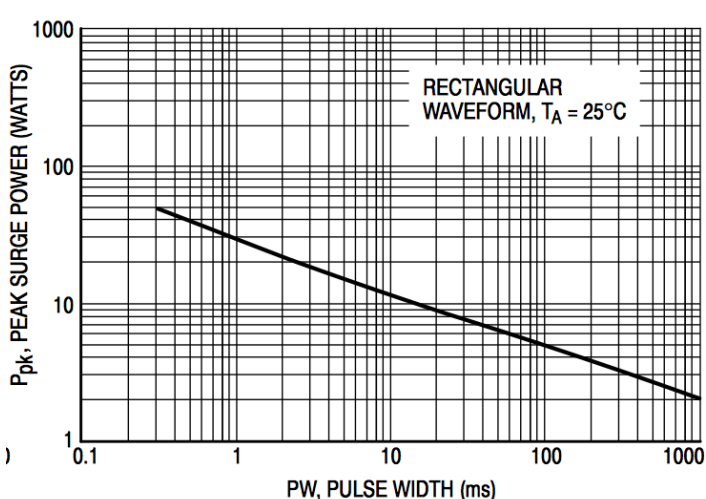


Figure 4. Maximum Nonrepetitive Surge Power

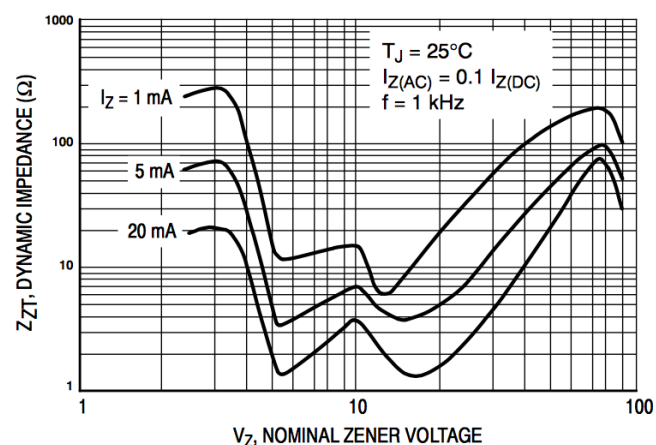

**Figure 5. Effect of Zener Voltage on
Zener Impedance**

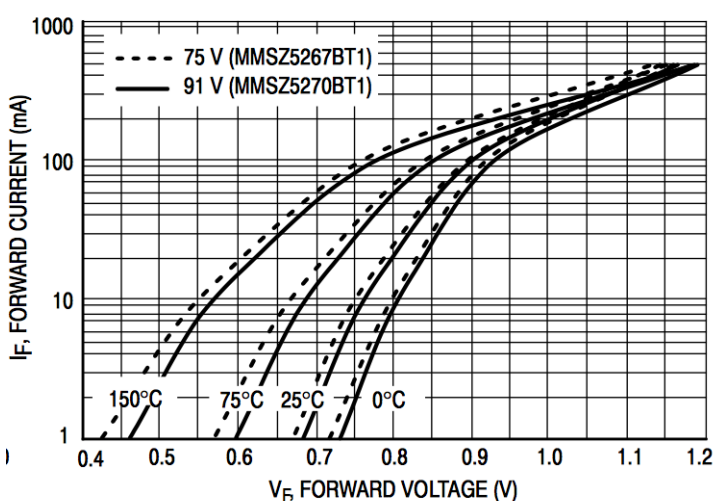


Figure 6. Typical Forward Voltage

MMSZ4685-MMSZ4717

SILICON PLANAR ZENER DIODES

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product. Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.