MOSPEC


S30C150C

Schottky Barrier Rectifiers

Using the Schottky Barrier principle with a Molybdenum barrier metal. These state-of-the-art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for low voltage, high frequency rectification, or as free wheeling and polarity protection diodes.

SCHOTTKY BARRIER RECTIFIERS

30 AMPERES
150 VOLTS




TO-220AB

Features

- ∗Low Forward Voltage.
- ∗Low Switching noise.
- ∗High Current Capacity
- ∗Guarantee Reverse Avalanche.
- ∗Guard-Ring for Stress Protection.
- ∗Low Power Loss & High efficiency.
- ∗150℃ Operating Junction Temperature
- ∗Low Stored Charge Majority Carrier Conduction.
- ∗Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O

∗*In compliance with EU RoHs 2002/95/EC directives*




DIM	MILLIMETERS	
	MIN	MAX
A	14.68	15.32
B	9.78	10.42
C	5.02	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	2.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.98
L	0.33	0.55
M	2.48	2.98
O	3.70	3.90

MAXIMUM RATINGS

Characteristic	Symbol	S30C150C	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	150	V
RMS Reverse Voltage	$V_{R(RMS)}$	105	V
Average Rectifier Forward Current (per diode) Total Device (Rated V_R), T_C=100℃	$I_{F(AV)}$	15 30	A
Peak Repetitive Forward Current (Rate V_R, Square Wave, 20kHz)	I_{FM}	30	A
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions half-wave, single phase, 60Hz)	I_{FSM}	200	A
Operating and Storage Junction Temperature Range	T_J , T_{stg}	-65 to +150	℃

ELECTRIAL CHARACTERISTICS

Characteristic	Symbol	S30C150C	Unit
Maximum Instantaneous Forward Voltage (I_F =15 Amp T_C = 25℃) (I_F =15 Amp T_C = 125℃)	V_F	0.95 0.85	V
Maximum Instantaneous Reverse Current (Rated DC Voltage, T_C = 25℃) (Rated DC Voltage, T_C = 125℃)	I_R	0.2 30	mA



S30C150C

FIG-1 FORWARD CURRENT DERATING CURVE

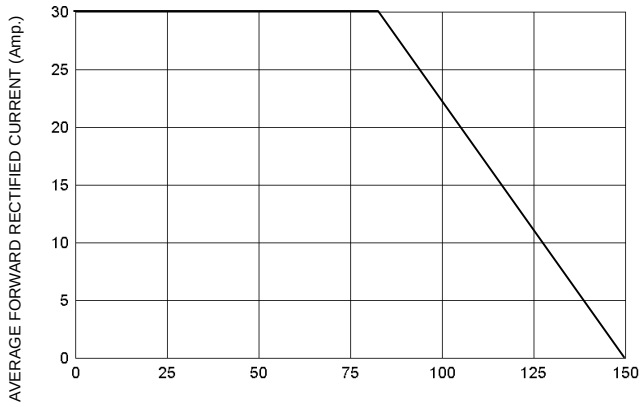


FIG-2 TYPICAL FORWARD CHARACTERISITICS

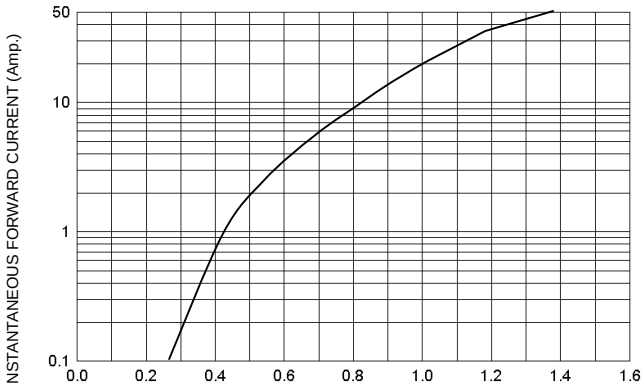


FIG-3 TYPICAL REVERSE CHARACTERISTICS

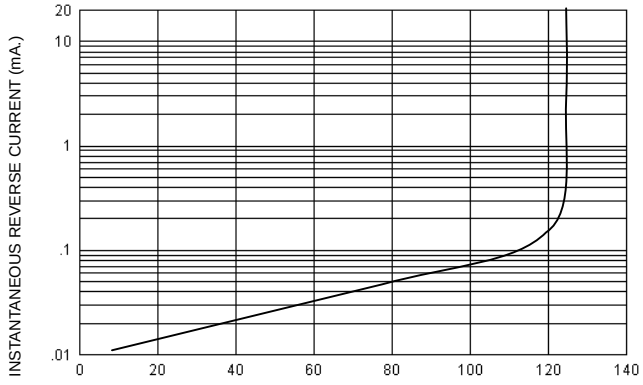


FIG-4 TYPICAL JUNCTION CAPACITANCE

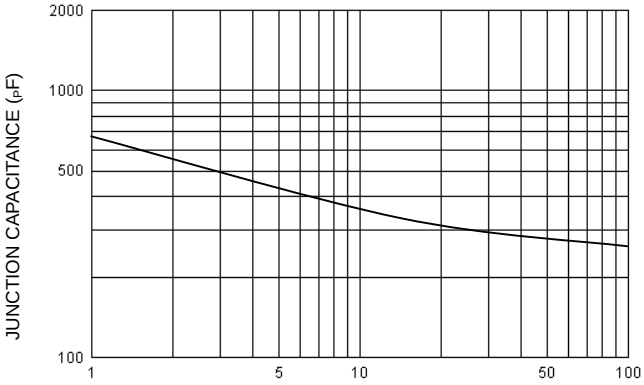


FIG-5 PEAK FORWARD SURGE CURRENT

