


SHEET OF

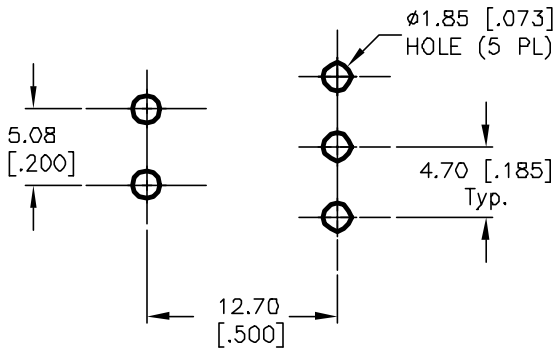


RECOMMENDED P.C.B. LAYOUT

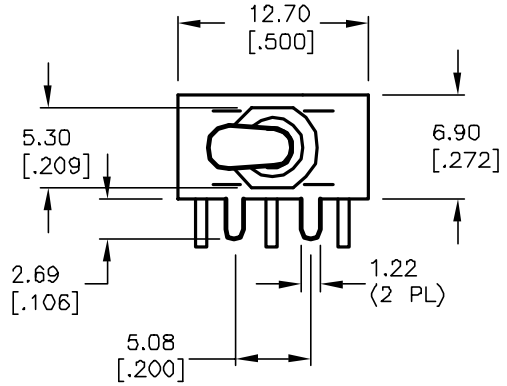

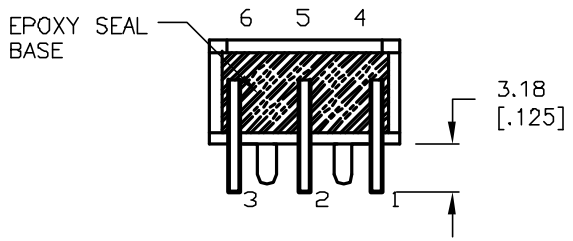


REAR VIEW




CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
(ON)	OFF	(ON)
2-3	OPEN	2-1

( )=MOMENTARY

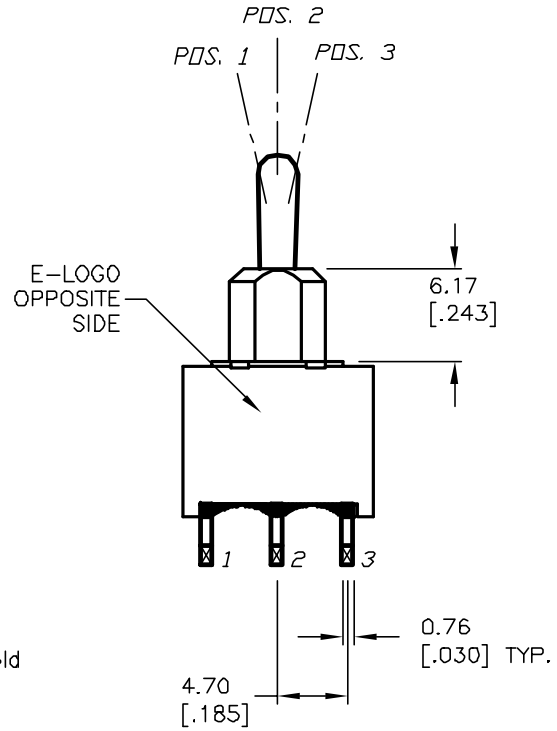

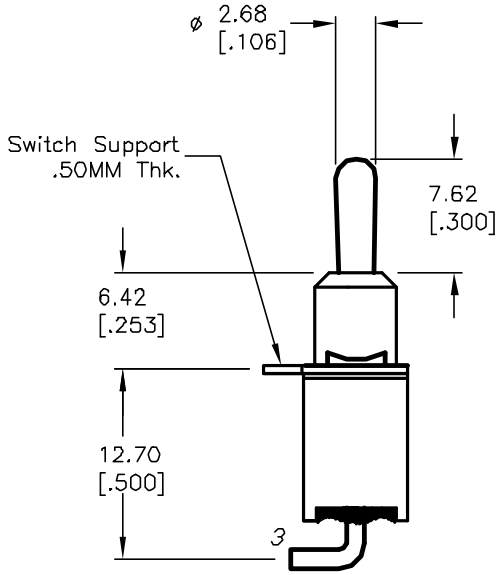

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4(VA) Max. @20V (AC or DC)
5. ▲ FIXED TERM. & MOVING CONTACT: COPPER ALLOY W/Gold PLATE over NI Plate
6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1,000V RMS @sea level.
9. OPERATING TEMP.: -30°C to +85°C.

REV.	ECN No.	DESCRIPTION	DATE	CHKD
B	12047	REVISED AND REDRAWN	4/9/02	CJB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: 100A WSP-4 T2 B4 M6 R E (GOLD CONTACTS)

SCALE	DATE	DR	DWG	REV
2:1	4/9/02	CJB	T201213	B