

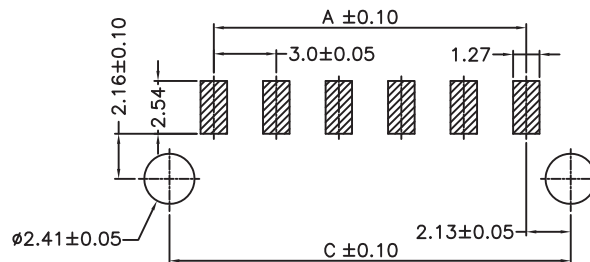
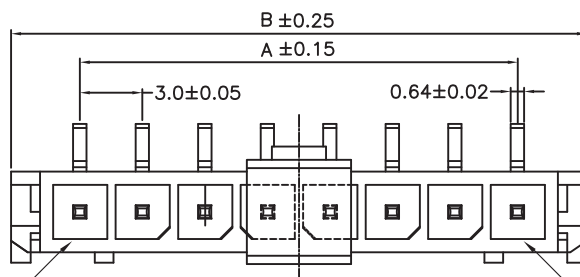
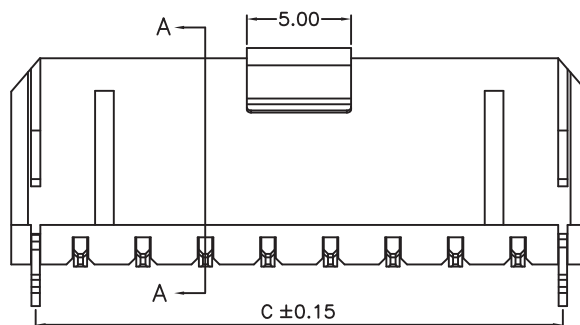


1	2	3	4	5
---	---	---	---	---



PCB LAYOUT - COMPONENT VIEW



A-A

TECHNICAL CHARACTERISTICS

MATERIAL

INSULATOR: LCP
FLAMABILITY RATING: UL94-V0
COLOR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: TIN
QUALITY CLASS: 25 MATING CYCLES
PITCH: 3.00MM

ENVIRONMENTAL

OPERATING TEMPERATURE: -40 UP TO 105 °C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL

CURRENT RATING: 5A
WORKING VOLTAGE: 250 VAC
INSULATOR RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 1500 VAC/MN
CONTACT RESISTANCE: 10 mOHM MAX

STANDARD

 CERTIFIED: E323964

SOLDERING


JEDEC LEAD FREE REFLOW SOLDERING PROCESS

PACKAGING

TAPE AND REEL WITH CAP

DIMENSION

A = 3.00 x (NB. PIN -1)
B = 3.00 x (NB. PIN +1) +0.65
C = (3.00 x NB. PIN) +1.3

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = ± 0.2 .XX = ± 0.15	 WÜRTH ELEKTRONIK	DESCRIPTION: 3.00 MM SMT SINGLE ROW MALE VERTICAL HEADER WITH THROUGH HOLE RETENTION CLIPS WERI PART NO: 662 3xx 135 922	SIZE A4
F								
E								
D								
C								
B				APPROVAL: BBu	UNIT: MM			
A	16-JUL-15	PDF	AK		SCALE:			
REV	DATE	FILE	BY		SHEET: 1/3			
					DRAW: AK			

