







T	D
1.0-2.0	8.0-8.2
2.0-2.5	8.2-8.4
2.5-3.0	8.4-8.6



▲ YELLOW LED
CIRCUIT: SPST
OFF (ON)

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATING: 30VDC @ 100mA
4. CONTACT RESISTANCE: 50 Milli-OHMS MAX.
5. INSULATION RESISTANCE: 100Mega-OHMS MIN@500VDC.
6. OPERATING FORCE: 250 ± 100gf
7. TRAVEL: 1.8±0.3mm
8. OPERATING TEMPERATURE: -40°C TO 85°C
9. OPERATING LIFE: 50,000 CYCLES
10. LED: YELLOW
11. ▲ DENOTES CRITICAL PARAMETERS
12. 2002/95/EC (ROHS) COMPLIANT

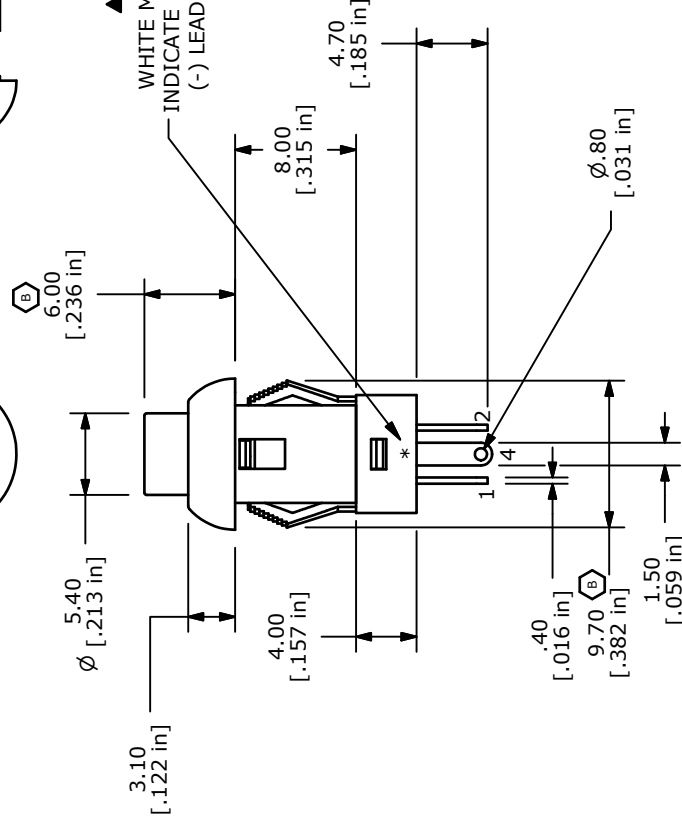

ISOMETRIC



E•SWITCH™

B	19582	CHANGED DIMS: was 9.6 & 6.1	1/13/11	BGL
A	18727	New Release	12/10/09	BLR
REV	PCR NO	DESCRIPTION	DATE	BY
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

TITLE LP10A1AY				
SCALE	2=1	DATE	12/10/2009	DR BLR
			DWG	B200203
			REV	B