tyco Electronics

M/A-COM

Open Carrier Double-Balanced Mixer For Microwave Telecommunications

MC4507
V2


Features

- LO & RF: 4.0 TO 20.0 GHz
- IF: DC TO 4.0 GHz
- LO DRIVE: +7 dBm (NOMINAL)
- MICROSTRIP INTERFACE

Description

The MC4507 is a double balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric and ferrite baluns to attain excellent performance. This mixer can also be used as a phase detector and/or bi-phase modulator since the IF port is DC coupled to the diodes. The use of high temperature solder and welded assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202, or MIL-DTL-28837, consult factory.

Product Image

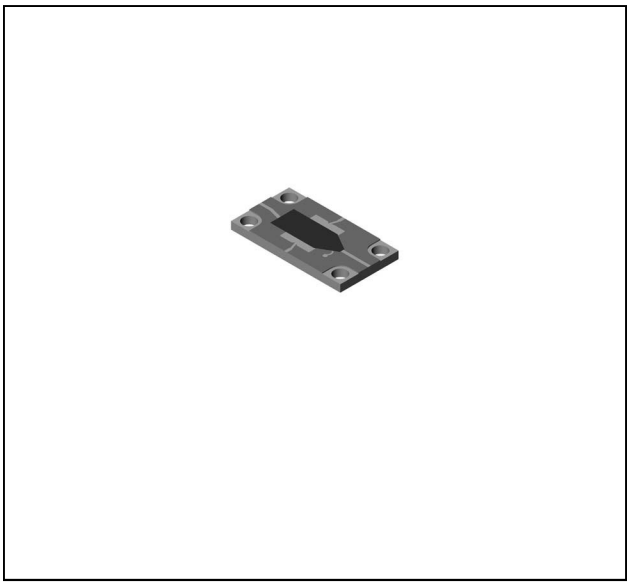

Ordering Information

Part Number	Package
MC4507	Open Carrier
MC4507-2	Open Carrier


Electrical Specifications: $Z_0 = 50\Omega$ Lo = +7 dBm (Downconverter application only)


Parameter	Test Conditions	Units	Typical	Guaranteed	
				+25ºC	-54º to +85ºC
SSB Conversion Loss (max) & SSB Noise Figure (max)	fR =6 to 18 GHz , fL = 6 to 18 GHz , fI = 0 to 2 GHz fR =6 to 18 GHz , fL = 6 to 18 GHz , fI = 0 to 4 GHz fR =4 to 20 GHz , fL = 4 to 20 GHz , fI = 0 to 4 GHz	dB dB dB	6.0 6.5 7.5	7.5 8.0 9.0	8.0 8.5 9.5
Isolation, L to R (min)	fL = 8 to 16 GHz fL = 6 to 18 GHz fL = 4 to 20 GHz	dB dB dB	35 30 20	25 18 12	23 16 10
Isolation, L to I (min)	fL = 8 to 16 GHz fL = 6 to 18 GHz fL = 4 to 20 GHz	dB dB dB	35 30 23	25 18 12	23 16 10
Isolation, R to I (min)	fL = 4 to 20 GHz	dB	35		
1 dB Conversion Comp.	fL = +7 dBm	dBm	+0		
Input IP3	fR1 = 8.4 GHz at –5 dBm, fR2 = 8.42 GHz at –5 dBm, fL = 8.6 GHz at +7 dBm fR1 = 14.4 GHz at –5 dBm, fR2 = 14.42 GHz at –5 dBm, fL = 15.4 GHz at +7 dBm	dBm dBm	+10 +11		


M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.


- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298


Typical Performance Curves

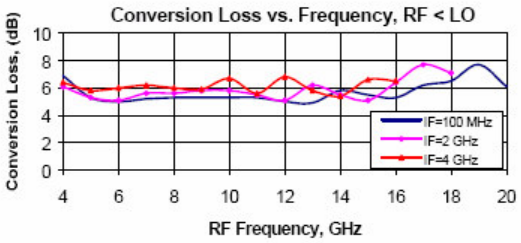


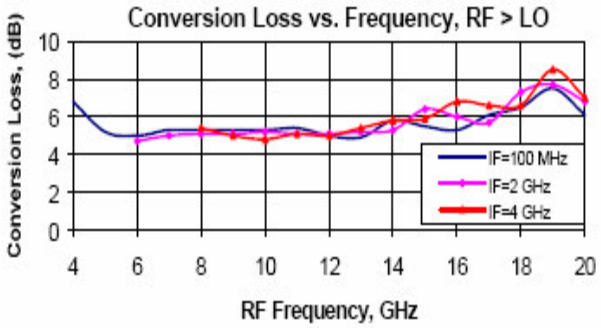


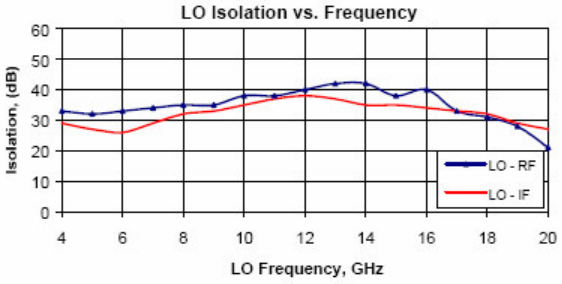

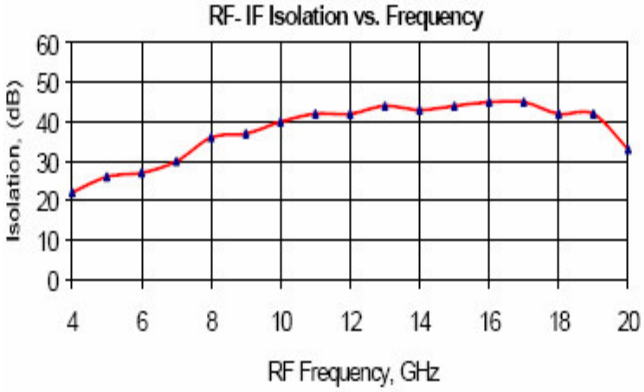

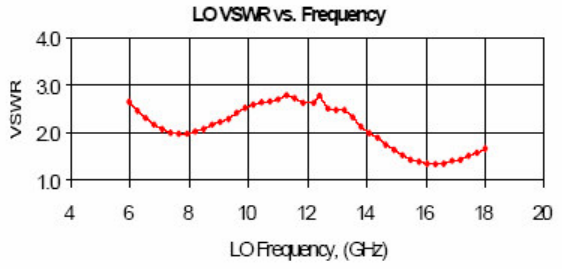

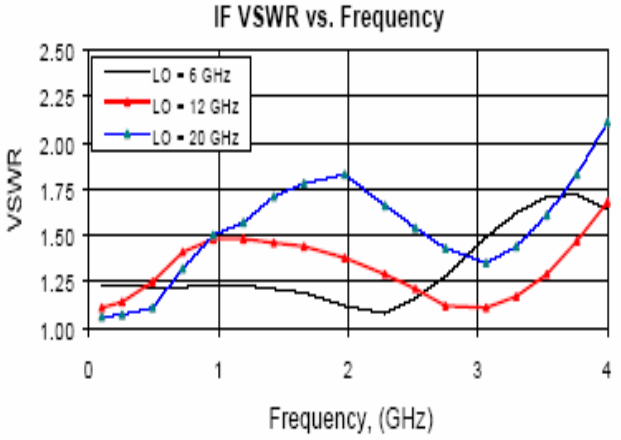

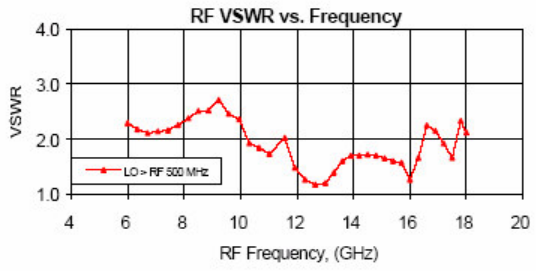

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298


Open Carrier Double-Balanced Mixer For Microwave Telecommunications

MC4507
V2

Absolute Maximum Ratings

Parameter	Absolute Maximum
Operating Temperature	-40ºC to +85ºC
Storage Temperature	-65ºC to +100ºC
Peak Input Power	+20 dBm max @ +25ºC +17 dBm max @ +85ºC
Peak Input Current	50 mA DC

Outline Drawing: Open Carrier* MC4507

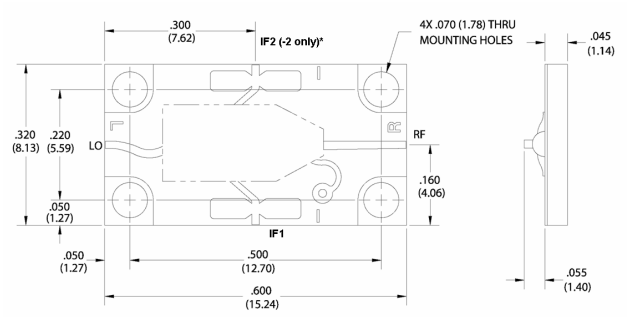

Weight: 0.2 grams (0.007 oz.) max

*For the base model, only the IF1 port is connected. For the “-2” model, only the IF2 port is connected.

* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298