
SF2146D

415.0 MHz SAW Filter

- ***3.8 X 3.8 X 1.0 mm Surface Mount Case***
- ***Complies with Directive 2002/95/EC (RoHS)***



SM3838-8

Absolute Maximum Ratings

Rating	Value	Units
Maximum Incident Power in Passband	+15	dBm
Maximum DC Voltage on any Non-ground Terminal	TBD	VDC
Storage Temperature Range in Tape and Reel	-45 to +85	°C
Suitable for Lead-free Soldering - Maximum Soldering Profile	260 °C for 30 s	

Electrical Characteristics

Characteristic	Sym	Notes	Min	Typ	Max	Units
Center Frequency	f_O	1		415		MHz
3 dB Bandwidth	BW_3		25	32		MHz
Maximum Insertion loss at 415 MHz	IL_{MAX}			4.0	4.5	dB
Amplitude Ripple, 403 to 427 MHz				1.5	2.0	dB_{P-P}
Attenuation:						
90 to 290 MHz			41	50		dB
290 to 328 MHz			32	40		
328 to 350 MHz			42	50		
350 to 375 MHz			30	40		
375 to 390 MHz			17	20		
445 to 475 MHz			13	20		
475 to 485 MHz			35	40		
485 to 900 MHz			30	36		
Input/Output Impedance			50 / 100			Ω
Operating Temperature			-30		+85	°C

Case Style	SM3838-8 3.8 x 3.8 mm Nominal Footprint
Lid Symbolization (Y=year, WW=week, S=shift) dot=pin 1 indicator	777, YWWS
Standard Reel Quantity Reel Size 7 Inch	500 Pieces/Reel
Reel Size 13 Inch	3000 Pieces/Reel


CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

Notes:


1. Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, fc.
3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
4. The design, manufacturing process, and specifications of this filter are subject to change.
5. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
6. US and international patents may apply.
7. RFM, stylized RFM logo, and RF Monolithics, Inc. are registered trademarks of RF Monolithics, Inc.

©2009-2010 by RF Monolithics, Inc.

Test Circuit

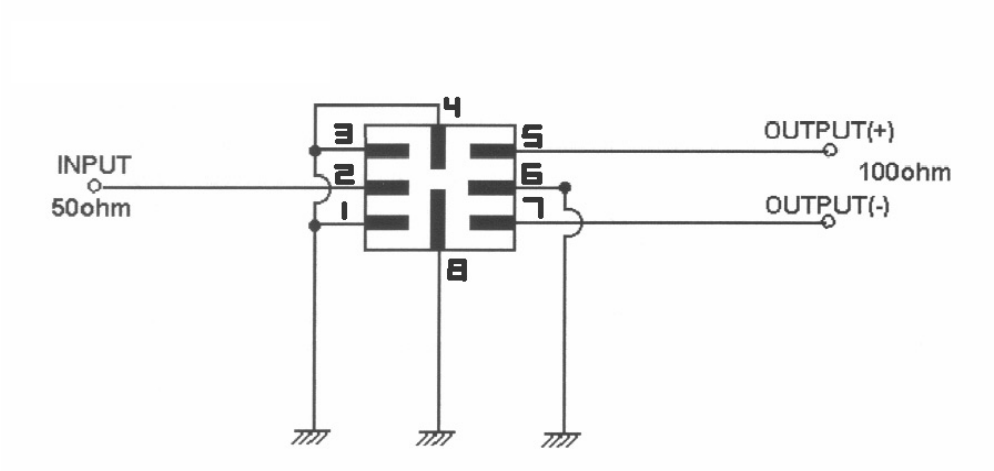

Frequency Response

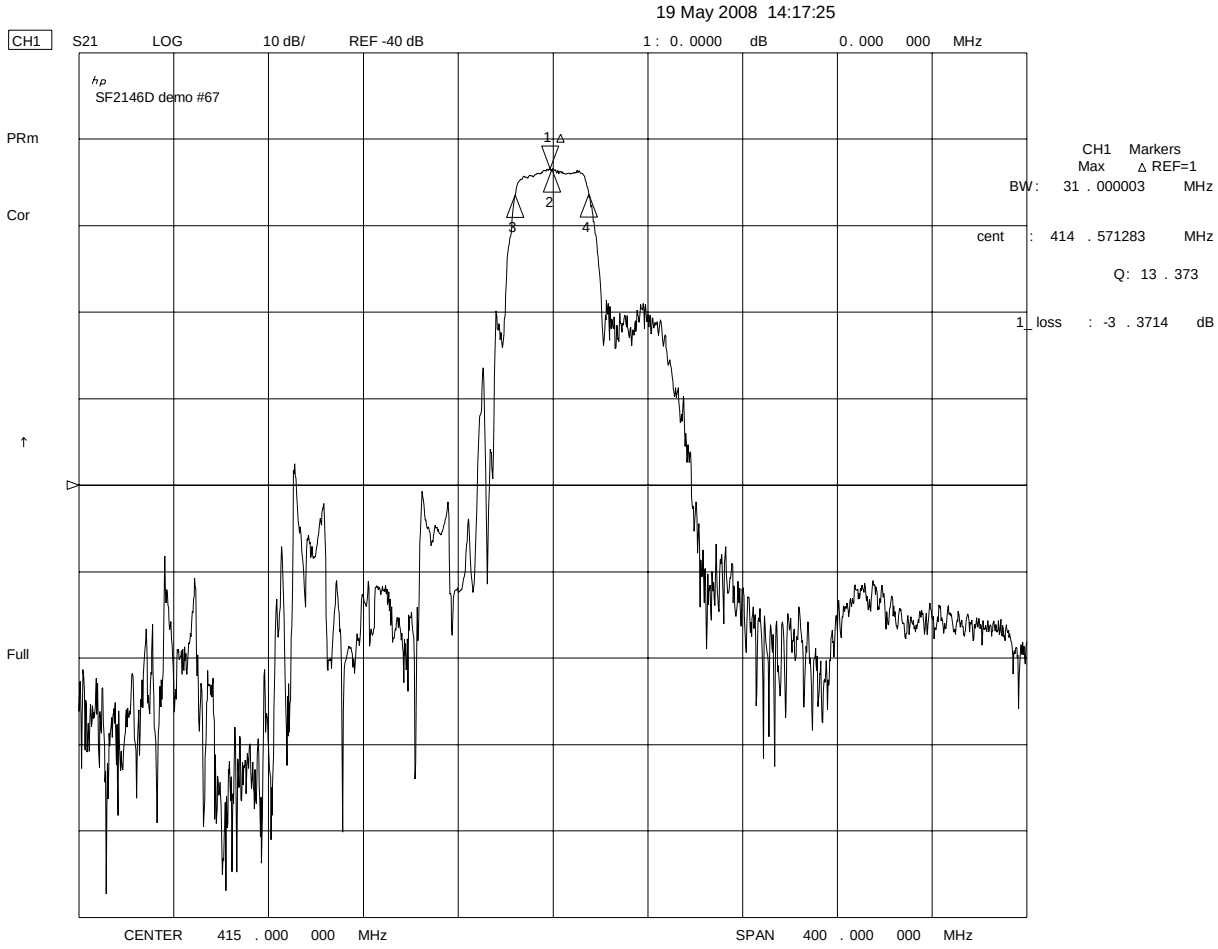


©2009-2010 by RF Monolithics, Inc.

SM3838-8 Case

8-Terminal Ceramic Surface-Mount Case

3.8 X 3.8 mm Nominal Footprint

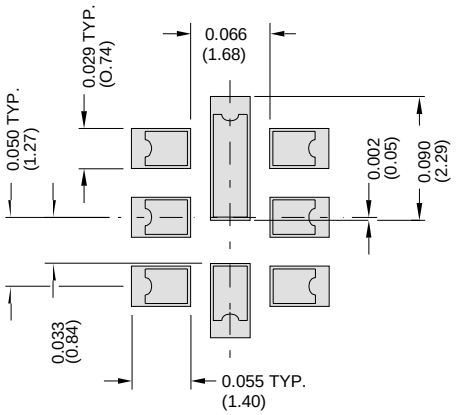

PCB Footprint


Case Dimensions						
Dimension	**mm**			**Inches**		
	Min	**Nom**	**Max**	**Min**	**Nom**	**Max**
A	3.6	3.8	4.0	0.142	0.150	0.157
B	3.6	3.8	4.0	0.142	0.150	0.157
C	1.05	1.20	1.35	0.041	0.047	0.053
D	0.95	1.10	1.25	0.037	0.043	0.049
E	0.90	1.00	1.10	0.035	0.040	0.043
F	0.50	0.60	0.70	0.020	0.024	0.028
G	2.39	2.54	2.69	0.090	0.100	0.110
H	1.40	1.75	2.05	0.055	0.069	0.080

Electrical Connections		
	Connection	**Terminals**
Port 1	Input	2
Port 2	Differential Output	5, 7
	Ground	All Others
Dot Indicates Pin 1		

Materials	
Solder Pad Plating	0.3 to 1.0 µm Gold over 1.27 to 8.89 µm Nickel
Lid Plating	2.0 to 3.0 µm Nickel
Body	Al_2O_3 Ceramic
Pb Free	


TOP VIEW

BOTTOM VIEW

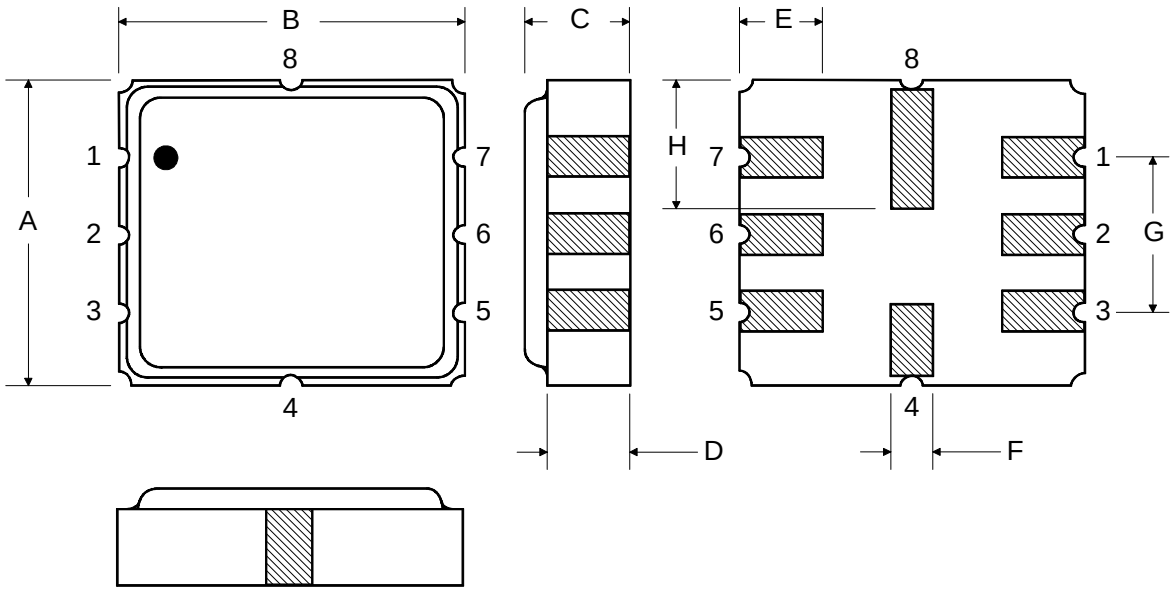

©2009-2010 by RF Monolithics, Inc.


Tape and Reel Specifications

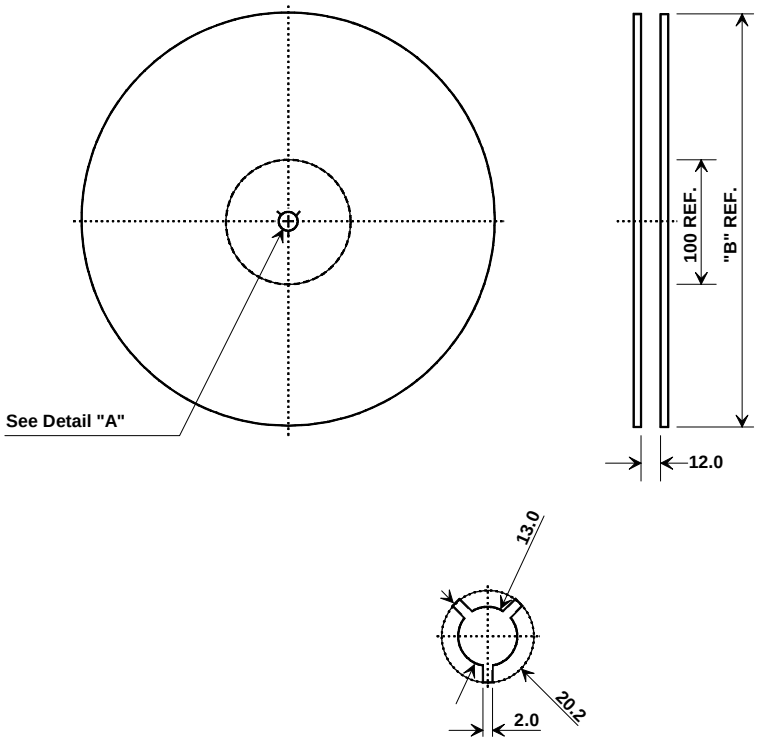

"B"		Quantity Per Reel
Inches	millimeters	
7	178	500
13	330	3000

COMPONENT ORIENTATION and DIMENSIONS

Carrier Tape Dimensions	
Ao	4.25 mm
Bo	4.25 mm
Ko	1.30 mm
Pitch	8.0 mm
W	12.0 mm

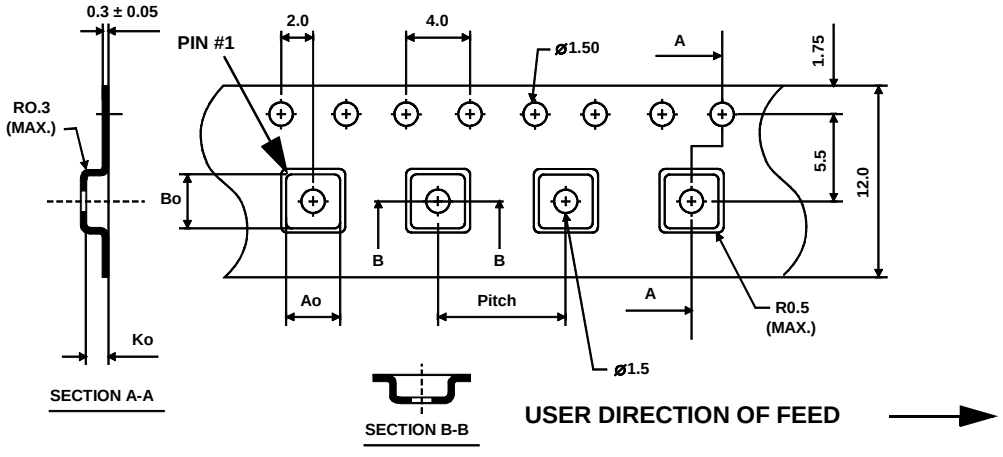

©2009-2010 by RF Monolithics, Inc.