

SHEET 1 OF 1

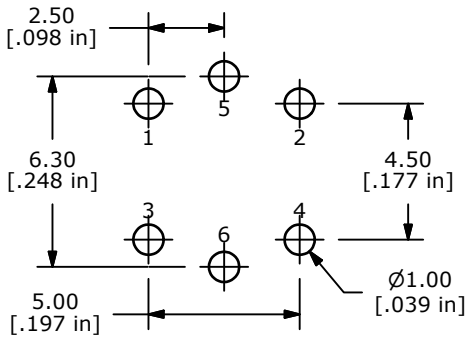


LED SPECS	UNITS	GREEN
FORWARD CURRENT	mA	20 TYP.
FORWARD VOLTAGE	V	2.1 TYP. - 2.5 MAX.
LUMINOUS INTENSITY	MCD	800 TYP.

E

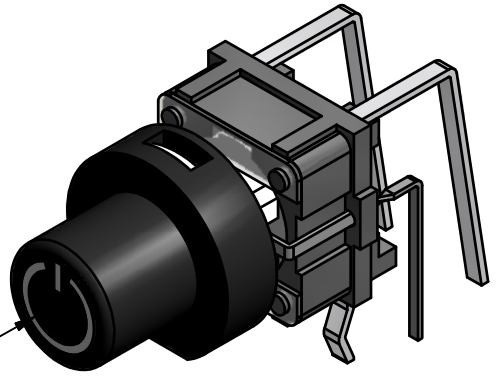



▲'POWER' TRANSLUCENT GRAPHICS

P.C.B. LAYOUT



CIRCUIT: SPST

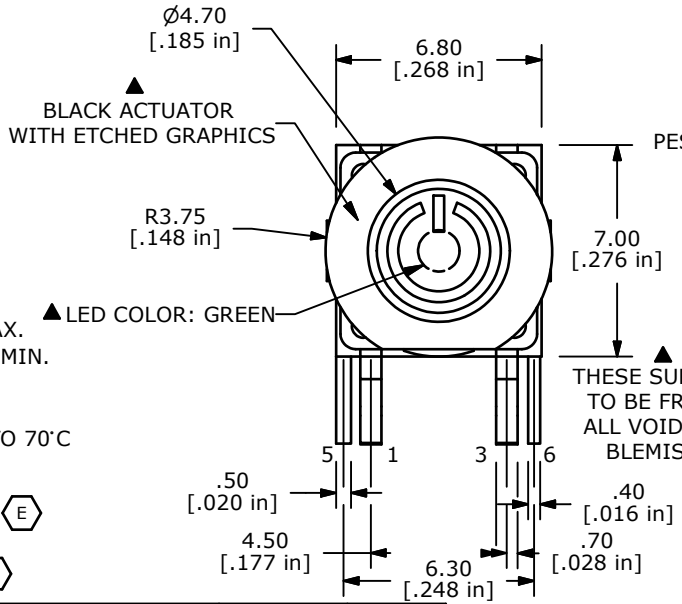

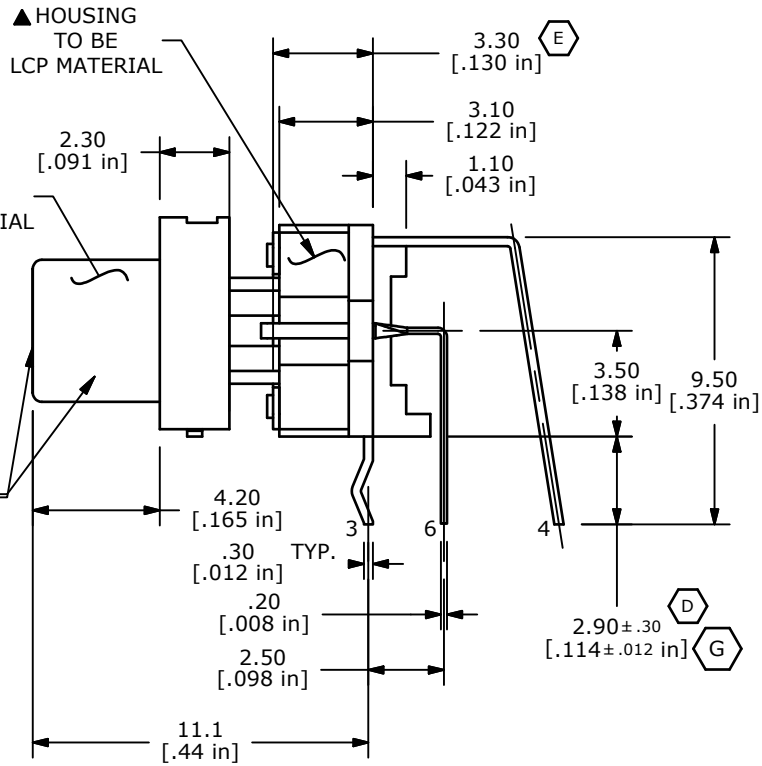

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. RATING: 12VDC @ 50mA
4. CONTACT RESISTANCE: 100mΩ MAX.
5. INSULATION RESISTANCE: 100MΩ MIN.
6. ▲OPERATING FORCE: 160± 50gf
7. TRAVEL: 0.2± 0.1mm
8. OPERATING TEMPURATURE: -20˚C TO 70˚C
9. OPERATING LIFE 500,000 CYCLES
10. ▲LED COLOR: GREEN
11. ▲ DENOTED CRITICAL PARAMETER (E)
12. 2002/95/EC (ROHS) COMPLIANT
13. ▲PACKAGE: 100 PIECES PER TRAY (H)

REV	PCR NO	DESCRIPTION	DATE	BY
H	21653	UPDATED NOTES	10/22/14	AS
G	20959	2.9±.3 WAS 3.1±.1, ADD VERT TO TITLE	1/9/13	EBP
F	20196	ADD SURFACE NOTE	10/05/11	BGL
E	19956	CORRECT LIFE NOTE AND LED CHART	05/17/11	BMA
D	19668	DIMENSION CHANGE was 3.65	2/8/11	BGL
C	19361	NEW RELEASE	11/04/10	BMA

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE TL1260GQSBLK-PWRVERT (G)

SCALE	DATE	DR	DWG	REV
4:1	10/15/2010	BLR	B200016	H