

# WPN20R

## 20 Watt Regulated DC/DC Converter



- Operating Temperature Range: -40°C to +100°C
- Industry Standard Pinout
- Input and Output Filtering
- Low Profile Shell
- Single and Dual Outputs
- High Efficiency
- Remote On/Off Function
- Output Trim Function
- Zero Load Operation
- EN 60950, UL1950, C-UL, VDE Agency Approvals



The WPN20R series is a family of high performance DC/DC converters available in three input voltage ranges of 9-18V, 18-36V and 33-75V. The unit is housed in a space saving aluminum shell and combines low cost with high performance across all line and load conditions. The 300KHz switching frequency and forward converter topology provide excellent performance

across all line and load conditions in a space saving package. Other features include: full regulation down to zero load, under voltage lock-out, internal temperature shutdown, soft start, remote on/off and over current protection.

An output trim feature is provided, allowing the user to compensate for long line lengths. The WPN20R Series is

assembled using a fully automated process incorporating 100% surface mounted components for increased reliability.

Applications include: Telecommunications, Battery Powered Systems, Process Control Equipment, Transportation Equipment and Distributed Power Systems.

### PRODUCT SELECTION CHART

Specifications are at  $T_A = +25^\circ\text{C}$  nominal input voltage, rated output current unless otherwise specified.

| MODEL*      | NOMINAL INPUT VOLTAGE (VDC) | RATED OUTPUT VOLTAGE (VDC) | OUTPUT CURRENT (A) |          | INPUT CURRENT NOM LOAD | EFFICIENCY (%) |
|-------------|-----------------------------|----------------------------|--------------------|----------|------------------------|----------------|
|             |                             |                            | MIN LOAD           | NOM LOAD |                        |                |
| WPN20R12S03 | 12                          | 3.3                        | 0.0                | 6.00     | 2.00                   | 82             |
| WPN20R12S05 | 12                          | 5.0                        | 0.0                | 4.00     | 2.00                   | 84             |
| WPN20R12S12 | 12                          | 12.0                       | 0.0                | 1.66     | 2.00                   | 86             |
| WPN20R12S15 | 12                          | 15.0                       | 0.0                | 1.33     | 2.00                   | 86             |
| WPN20R12D05 | 12                          | ±5.0                       | 0.0                | ±2.00    | 2.00                   | 84             |
| WPN20R12D12 | 12                          | ±12.0                      | 0.0                | ±0.83    | 2.00                   | 86             |
| WPN20R12D15 | 12                          | ±15.0                      | 0.0                | ±0.67    | 2.00                   | 86             |
| WPN20R24S03 | 24                          | 3.3                        | 0.0                | 6.00     | 1.00                   | 83             |
| WPN20R24S05 | 24                          | 5.0                        | 0.0                | 4.00     | 1.00                   | 84             |
| WPN20R24S12 | 24                          | 12.0                       | 0.0                | 1.66     | 1.00                   | 87             |
| WPN20R24S15 | 24                          | 15.0                       | 0.0                | 1.33     | 1.00                   | 87             |
| WPN20R24D05 | 24                          | ±5.0                       | 0.0                | ±2.00    | 1.00                   | 85             |
| WPN20R24D12 | 24                          | ±12.0                      | 0.0                | ±0.83    | 1.00                   | 87             |
| WPN20R24D15 | 24                          | ±15.0                      | 0.0                | ±0.67    | 1.00                   | 87             |
| WPN20R48S03 | 48                          | 3.3                        | 0.0                | 6.00     | 0.50                   | 83             |
| WPN20R48S05 | 48                          | 5.0                        | 0.0                | 4.00     | 0.50                   | 85             |
| WPN20R48S12 | 48                          | 12.0                       | 0.0                | 1.66     | 0.50                   | 88             |
| WPN20R48S15 | 48                          | 15.0                       | 0.0                | 1.33     | 0.50                   | 86             |
| WPN20R48D05 | 48                          | ±5.0                       | 0.0                | ±2.00    | 0.50                   | 85             |
| WPN20R48D12 | 48                          | ±12.0                      | 0.0                | ±0.83    | 0.50                   | 87             |
| WPN20R48D15 | 48                          | ±15.0                      | 0.0                | ±0.67    | 0.50                   | 87             |

**NOTE:** Other input to output voltages may be available. Please consult factory.

# SPECIFICATIONS, ALL MODELS

Specifications are at  $T_A = +25^{\circ}\text{C}$  nominal input voltage, rated output current unless otherwise specified.

|               | PARAMETER                                | CONDITIONS                              | MIN  | TYP       | MAX         | UNITS                 |
|---------------|------------------------------------------|-----------------------------------------|------|-----------|-------------|-----------------------|
| INPUT         | <b>INPUT</b>                             |                                         |      |           |             |                       |
|               | Voltage Range                            |                                         | 9    | 12        | 18          | $V_{DC}$              |
|               |                                          |                                         | 18   | 24        | 36          | $V_{DC}$              |
|               |                                          |                                         | 33   | 48        | 75          | $V_{DC}$              |
|               | Reflected Ripple Current                 | All Input Ranges                        |      |           | 50          | mApk-pk               |
| INPUT CONTROL | <b>INPUT CONTROL</b>                     |                                         |      |           |             |                       |
|               | Temperature Shutdown                     | Case                                    | 105  |           | 115         | $^{\circ}\text{C}$    |
|               | Temperature Hysteresis                   |                                         |      | 10        |             | $^{\circ}\text{C}$    |
|               | Quiescent Standby Current                | Current Into + $V_{IN}$                 |      | 8         | 10          | mA                    |
|               | Undervoltage Control                     | See Attached Plots                      |      |           |             |                       |
| OUTPUT        | <b>OUTPUT</b>                            |                                         |      |           |             |                       |
|               | ISOLATION                                |                                         |      |           |             |                       |
|               | Rated Voltage                            |                                         | 1500 |           |             | $V_{DC}$              |
|               | Test Voltage                             | 60Hz, 10 Seconds                        | 1500 |           |             | $V_{DC}$              |
| GENERAL       | Resistance                               |                                         |      | 10        |             | GW                    |
|               | Capacitance                              |                                         |      | 400       |             | pF                    |
|               | Leakage Current                          |                                         |      | 30        |             | mArms                 |
|               | Rated Power                              |                                         |      |           | 20          | W                     |
|               | Voltage Setpoint Accuracy                |                                         |      |           | $\pm 1.5$   | %                     |
|               | Temperature Coefficient                  |                                         |      |           | $\pm 0.005$ | %/ $^{\circ}\text{C}$ |
|               | Line Regulation                          |                                         |      |           |             |                       |
|               | Singles                                  | High Line to Low Line                   |      |           | $\pm 0.1$   | %                     |
|               | Duals                                    | High Line to Low Line                   |      |           | $\pm 0.5$   | %                     |
|               | Load Regulation                          |                                         |      |           |             |                       |
|               | Singles                                  | Mn Load to Nom. Load                    |      |           | $\pm 0.5$   | %                     |
|               | Duals                                    | Mn Load to Nom. Load                    |      |           | $\pm 2.0$   | %                     |
|               | Ripple & Noise                           |                                         |      |           |             |                       |
|               | Single Outputs                           | BW = 5Hz to 20MHz                       |      | 60        | 100         | mVp-p                 |
|               | Dual Outputs                             | BW = 5Hz to 20MHz                       |      | 50        | 100         | mVp-p                 |
|               | Output Adjust Range                      | See Attached Plots                      |      |           |             |                       |
|               | Short Circuit and Overcurrent Protection | Continuous                              |      |           |             |                       |
|               | Max Capacitive Load                      |                                         |      | 550       |             | mF/A                  |
|               | <b>GENERAL</b>                           |                                         |      |           |             |                       |
|               | Switching Frequency                      |                                         |      | 300       |             | KHz                   |
|               | MTTF per ML-HDBK-217                     | Circuit Stress Method                   |      |           |             |                       |
|               | Ground Benign                            | $T_A = +25^{\circ}$ Unmodified Database |      | 1,400,000 |             | Hr                    |
|               | Package Weight                           |                                         |      | 32        |             | g                     |
|               | <b>TEMPERATURE</b>                       |                                         |      |           |             |                       |
|               | Specification                            | Case                                    | -40  |           | + 85        | $^{\circ}\text{C}$    |
|               | Operation                                | Case                                    | -40  |           | + 85        | $^{\circ}\text{C}$    |
|               | Storage                                  |                                         | -55  |           | +125        | $^{\circ}\text{C}$    |

## REMOTE ON/OFF CONTROL


Logic Compatibility ..... Open Collector TTL  
 EC On ..... Open Circuit  
 EC Off ..... < 0.7V  
 Shutdown Idle Current ..... 8mA

## ORDERING INFORMATION



Device Family WPN20R XXYZZ  
 20W Regulated DC/DC Unit  
 Model Number \_\_\_\_\_  
 xx = Input Range, e.g. 48V  
 y = Number of Outputs (S=single; D=dual)  
 zz = Output Voltage, e.g. '05' for 5V

## MECHANICAL

PIN SIDE DOWN

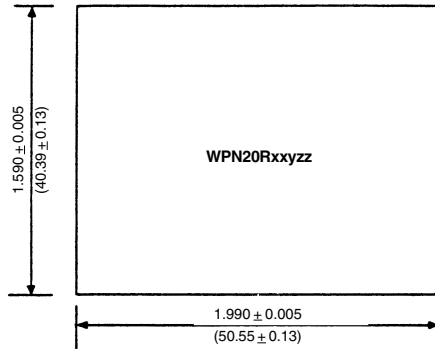

SIDE VIEW

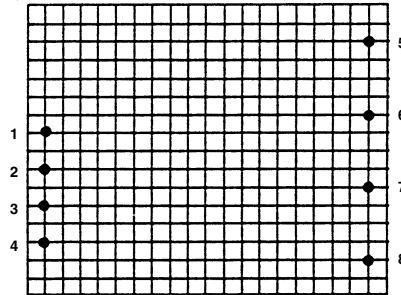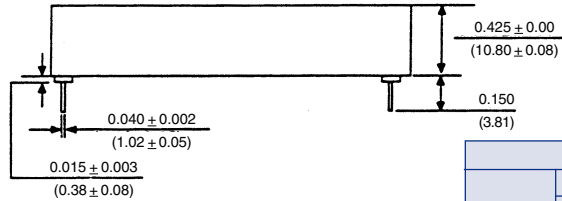

PIN SIDE UP


PIN CONNECTIONS

| Number | Pin Function  |               |
|--------|---------------|---------------|
|        | Singles       | Duals         |
| 1      | +VIN          | +VIN          |
| 2      | -VIN          | -VIN          |
| 3      | NO PIN        | NO PIN        |
| 4      | Remote On/Off | Remote On/Off |
| 5      | NO PIN        | +VOUT         |
| 6      | +VOUT         | COMMON        |
| 7      | -VOUT         | -VOUT         |
| 8      | TRIM          | TRIM          |


### NOTES:

All dimensions are in inches (millimeters).  
 GRID: 0.100 inches (2.54 millimeters)  
 Pin Placement: Tolerance: ±0.015  
 Marked with: specific model ordered, date code, job code.  
 MATERIAL: Units are encapsulated in a low thermal resistance molding compound which has excellent chemical resistance, wide operating temperature range, and good electrical properties under high humidity environments. The encapsulant and outer shell of the unit have UL94V-0 ratings. Lead material is brass with a solder plated surface to allow ease of solderability.

## SIMPLIFIED CIRCUIT DIAGRAM

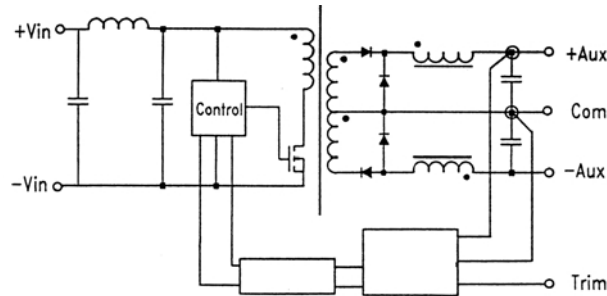


## THERMAL DERATING CURVE

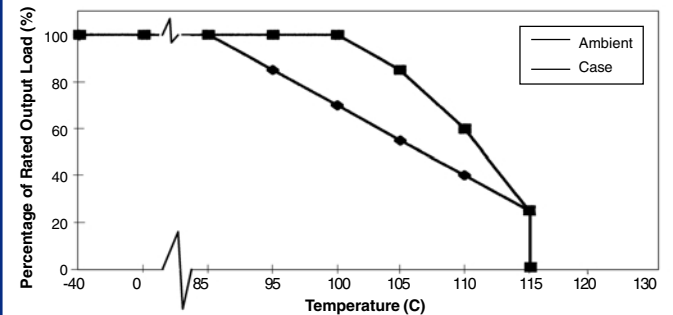

## HYSTERESIS GRAPH

HYSTERESIS GRAPH







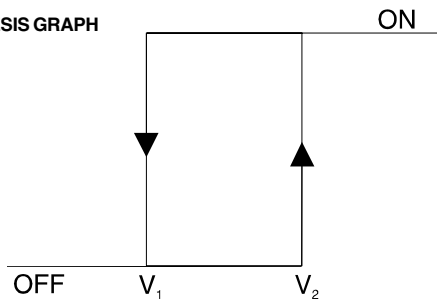


### Undervoltage Lockout Threshold Voltages

| Nominal Input Voltage Range | Shutdown Low Voltage (V1) OFF | Shutdown High Voltage (V2) ON |
|-----------------------------|-------------------------------|-------------------------------|
| 12                          | 7                             | 8.8                           |
| 24                          | 15.5                          | 17                            |
| 48                          | 30                            | 33                            |

Specifications typical at TA=25°C, rated output current.

# PERFORMANCE GRAPHS

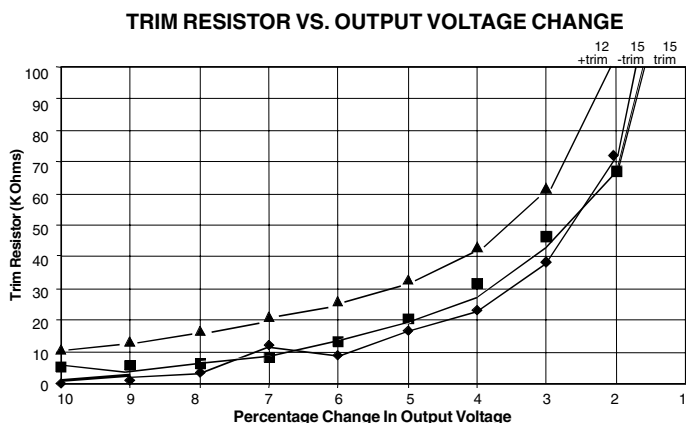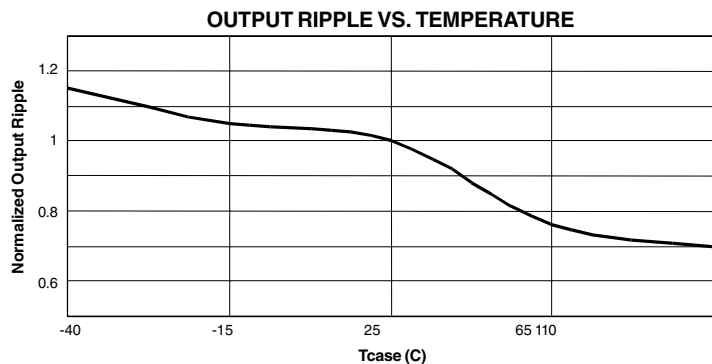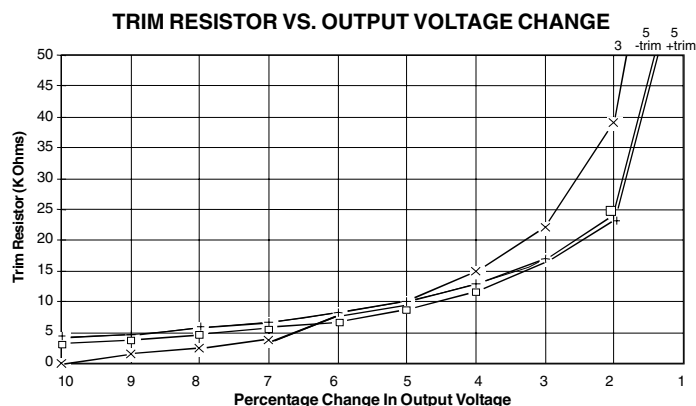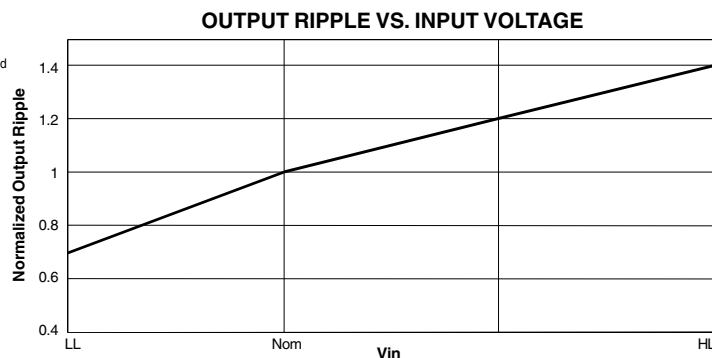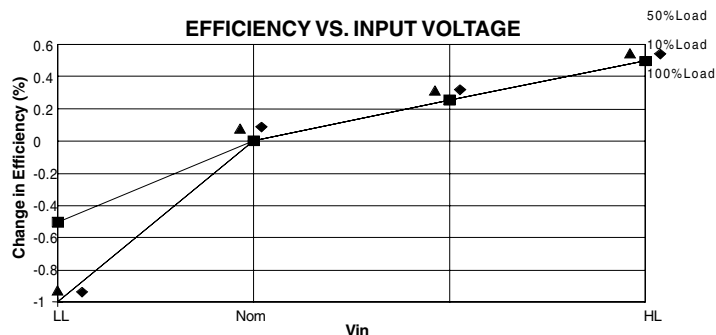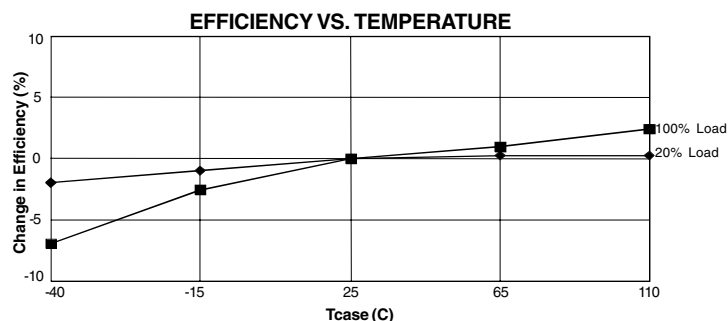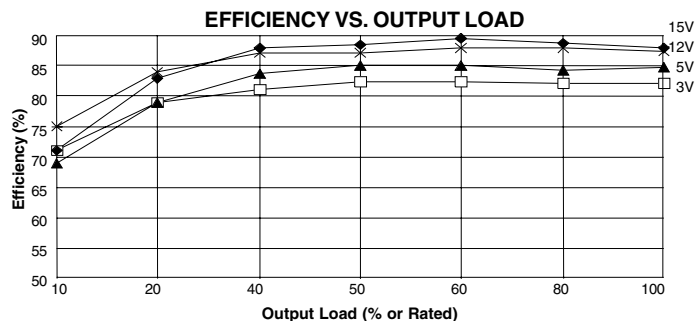

**Power Electronics Division, United States**  
 3400 E Britannia Drive, Tucson, Arizona 85706  
 Tel: 800.547.2537 Fax: 520.770.9369

**C&D Technologies, (NCL)**  
 Milton Keynes MK14 5BU UK  
 Tel: +44 (0)1908 615232 Fax: +44 (0)1908 617545

Any data, prices, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application. C&D Technologies, Inc. does not warrant or recommend that any of its products be used in any life support or aviation or aerospace applications.