


PARAMETER		UNITS
Primary Impedance	600	$\Omega$
Secondary Impedance	50	$\Omega$
Longitudinal Balance 200 - 50000 Hz	60dB min.	
Primary DC Resistance	10	$\Omega$ Max.
Secondary DC Resistance	4	$\Omega$ Max.
Frequency Response 300 - 50000Hz	$\pm 1.5$	dB
Insertion Loss	1.0 dB @ 25kHz	
Isolation (HI-POT)	1000	$V_{RMS}$
Primary DC	None	


# T-831

Pin  
Position  
Grid  
0.100  
(2.54)


● Holes  
For  
Bobbin  
Pins

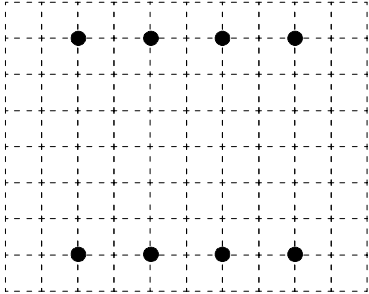

### Physical Dimensions in inches (mm)

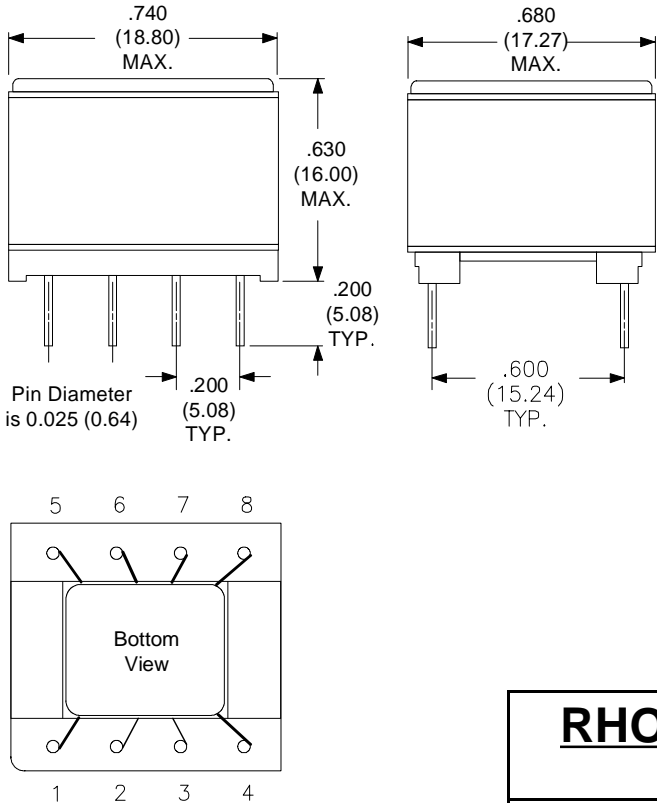

### SCHEMATIC DIAGRAM



## **RHOMBUS INDUSTRIES INC.** **FSCM NO. 16714**

RHOMBUS P/N: T-831

CUST P/N:

NAME:

DATE: 3/18/97

SHEET: 1 OF 1