
# KEMET Part Number: C1206C223KDRACTU

(C1206C223KDRAC7800)

SMD Comm X7R HV, Ceramic, 0.022 uF, 10%, 1,000 V, X7R, SMD, MLCC, High Voltage, Temperature Stable, 1206

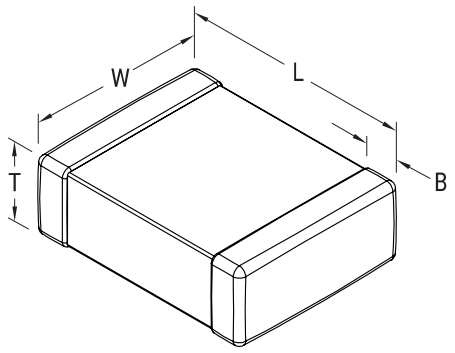


| General Information | |
|---|---|
| **Supplier:** | KEMET |
| **Series:** | SMD Comm X7R HV |
| **Style:** | SMD Chip |
| **Description:** | SMD, MLCC, High Voltage, Temperature Stable |
| **Features:** | High Voltage |
| **RoHS:** | Yes |
| **Termination:** | Tin |
| **Marking:** | No |
| **Failure Rate:** | N/A |
| **Miscellaneous:** | Note: Referee time for X7R dielectric for this part number is 1000 hours |
| **Chip Size:** | 1206 |
| **Shelf Life:** | 78 Weeks |
| **MSL:** | 1 |

| Dimensions | |
|---|---|
| **L** | 3.2mm +/-0.2mm |
| **W** | 1.6mm +/-0.2mm |
| **T** | 1.7mm +/-0.20mm |
| **B** | 0.5mm +/-0.25mm |

| Packaging Specifications | |
|---|---|
| **Packaging:** | T&R, 180mm, Plastic Tape |
| **Packaging Quantity:** | 2000 |

| Specifications | |
|---|---|
| **Capacitance:** | 0.022 uF |
| **Capacitance Tolerance:** | 10% |
| **Voltage DC:** | 1000 VDC |
| **Dielectric Withstanding Voltage:** | 1,200 V |
| **Temperature Range:** | -55/+125C |
| **Temperature Coefficient:** | X7R |
| **Dissipation Factor:** | 2.5% 1kHz 25C |
| **Aging Rate:** | 3% Loss/Decade Hour |
| **Insulation Resistance:** | 4.545 GOhms |

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

© 2006 - 2018 IntelliData.net