



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Name: SAW Filter 70MHz 2.25MHz BW DIP 34.7×12.7mm

TST Parts No.: TB1044A

Customer Parts No.: _____


Customer signature required

Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Andy Yu 

Approval by: _____ Francis Chen 

Date: _____ 12/06/2011

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 70 MHz(BW=2.25MHz) DIP 34.7mmx12.7mm

MODEL NO.: TB1044A

REV.1.0

A. MAXIMUM RATING:

1. Operating Temperature: 0 °C ~ +70 °C
2. Storage Temperature: -40 °C ~ +85 °C
3. Input power: 10dBm

RoHS Compliant

Lead-free soldering

B. Characteristics :


Electrostatic Sensitive Device (ESD)

Ambient Temperature: 25 °C


Characteristics		Value			Note
		Min.	Typ.	Max.	
Center frequency F_c	MHz	69.9	70.0	70.1	-
Minimum Insertion loss I.L.	dB	-	20.6	22	-
1dB BW	MHz	2.25	2.32	-	
30dB BW	MHz	-	2.88	3.0	
Attenuation (Reference to Max IL)					
Fc-5MHz , Fc+5MHz	dB	35	53	-	-
Fc-50MHz ~ Fc-5MHz	dB	40	43	-	-
Fc+5MHz ~ Fc+50MHz	dB	40	56	-	-
Temp Coefficient	ppm/K	-	-0.032	-	-
Matching:					
1.The input of the filter will be matched to <u>50 ohm</u>					
2.The output of the filter will be matched to <u>50 ohm</u>					

D. FREQUENCY CHARACTERISTICS :


1.S21 Response: (span : 20MHz)

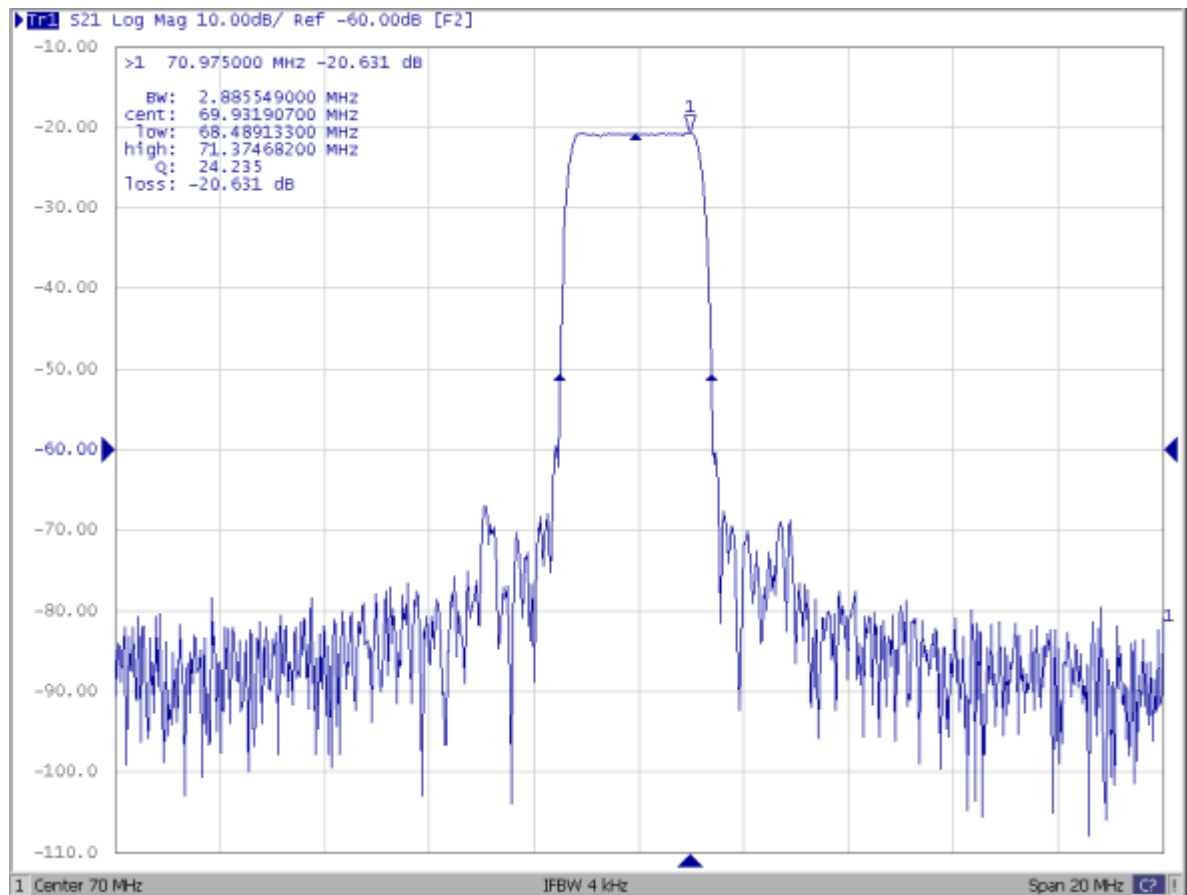


2. Pass-band Response: (span : 3MHz)

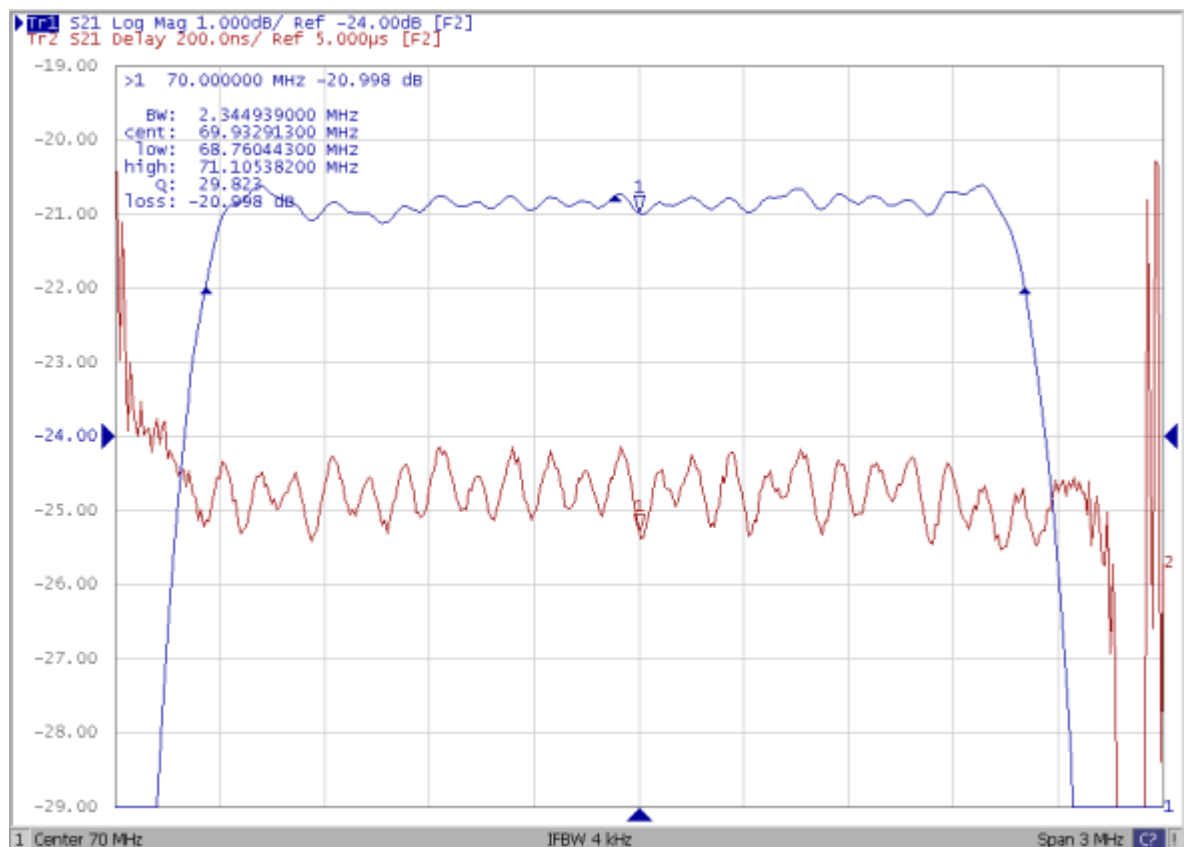

3. S21 Response: (span : 120MHz)

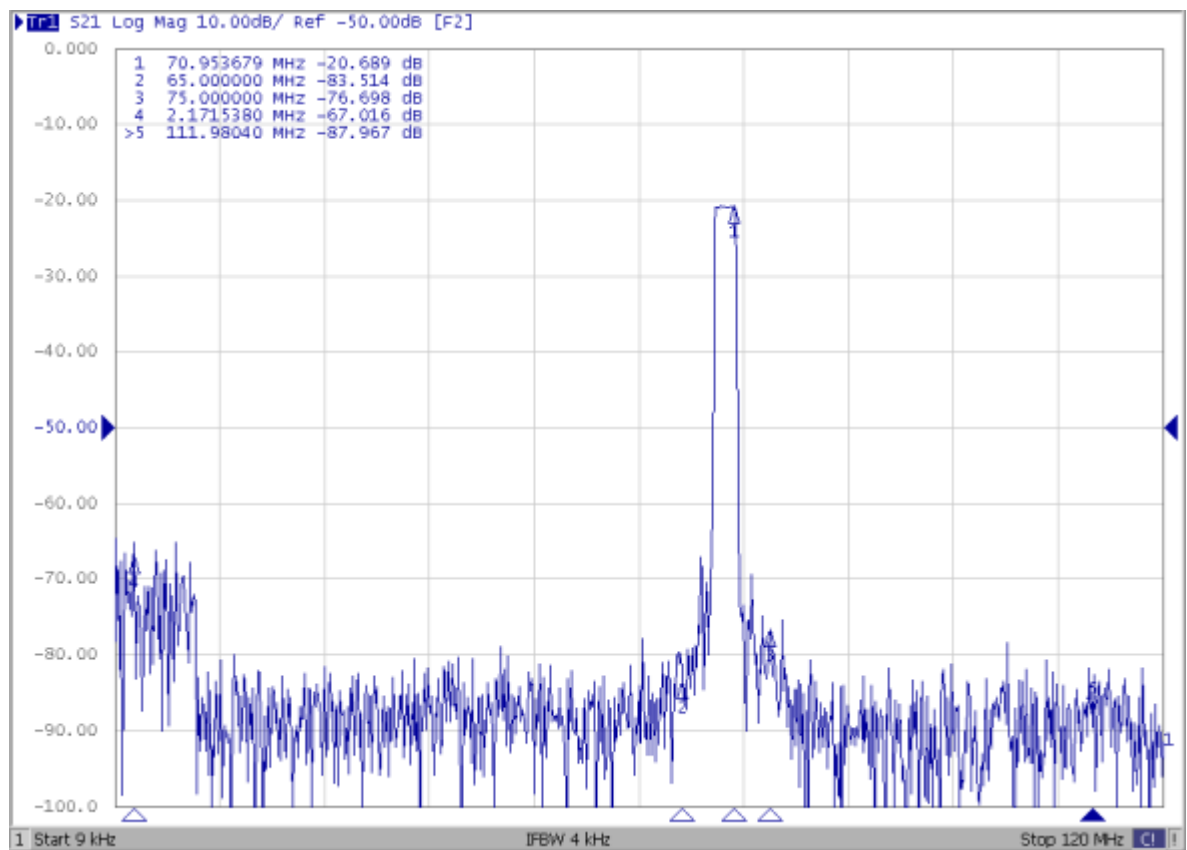


4. S11、S22 Smith Chart (span : 20MHz)

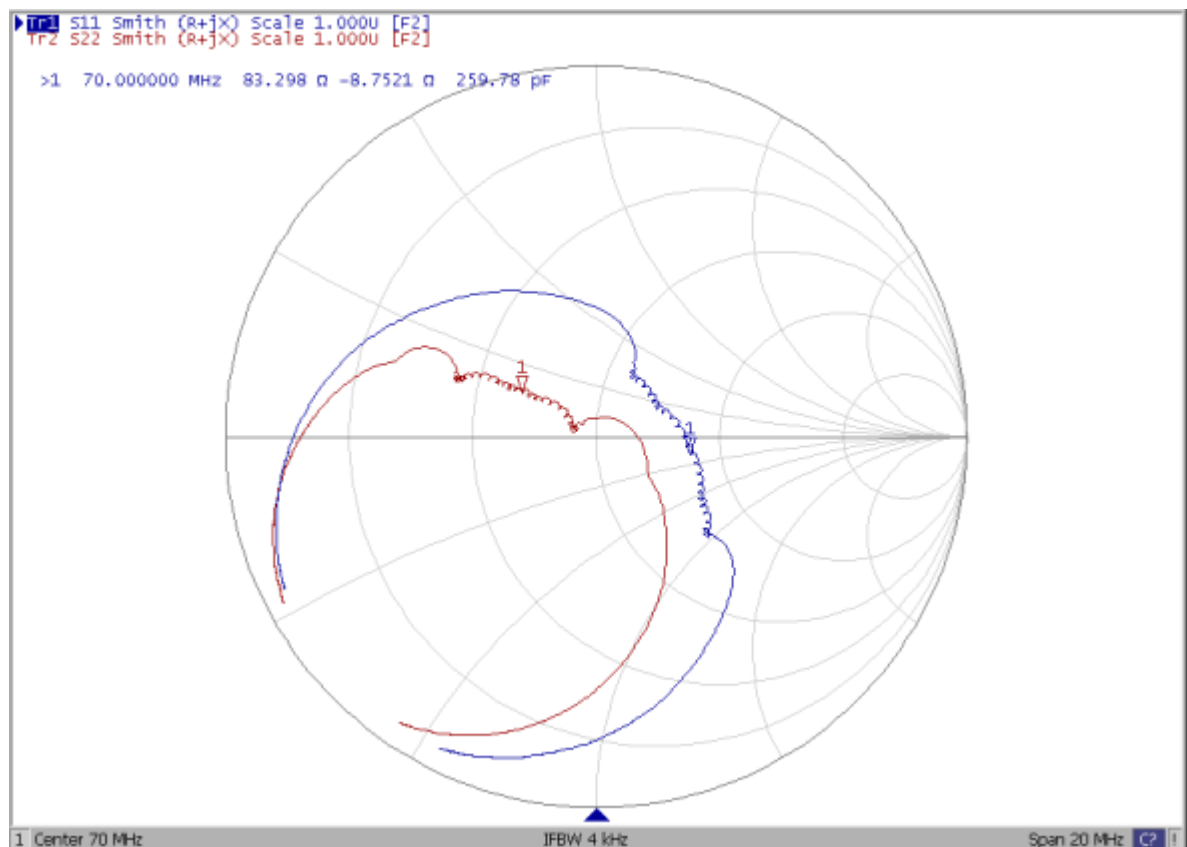


E. MEASUREMENT CIRCUIT

$Z_{in} = Z_{out} = 50 \text{ ohm}$

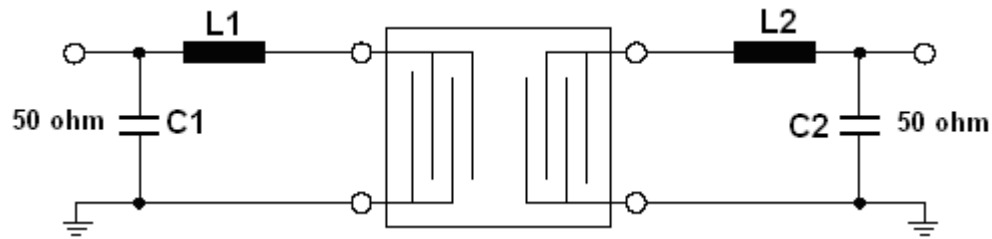

$L1=390\text{nH}$, $C1=82\text{pF}$, $L2=352\text{nH}$, $C2=100\text{pF}$

F. OUTLINE DRAWING:

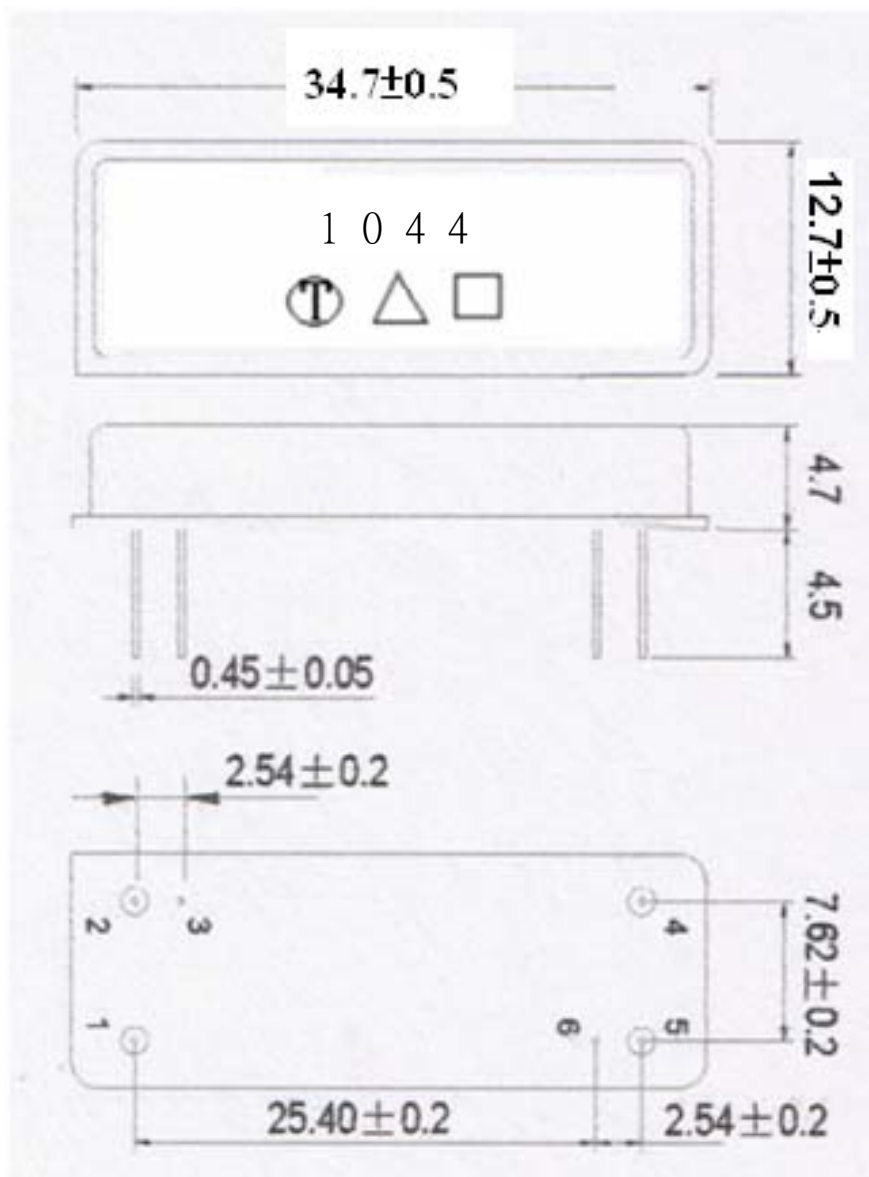

Pin 1: RF input

Pin 4: RF output

Pin 3,6: Case Ground

Pin 2, 5: Ground

□: Week Code (Follow the table from planner each year)

Unit : mm

△ : Product / Year Code

Year	2009	2010	2011	2012
Product Code	B	b	<u>B</u>	<u>b</u>

G. RECOMMENDED REFLOW PROFILE:

