
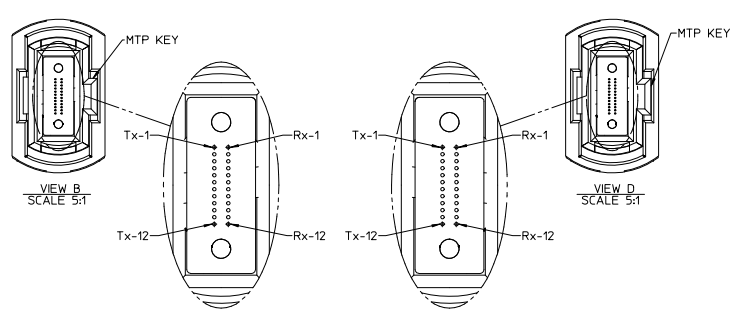


CXP CABLE ASSEMBLY PART NUMBER				OVERALL LENGTH L (m)	CABLE DIA. (mm)	CABLE TYPE
STANDARD BANDWIDTH (OM2) (ORANGE CABLE)	HIGH BANDWIDTH (OM3) (AQUA CABLE)	HIGH BANDWIDTH (OM4) (AQUA CABLE)	TBD			
106284-0001	106284-1001	106284-7001		1.0 +0.2/-0	3.8	BARE FIBER INTERCONNECT, SINGLE JACKET
106284-0151			TBD	1.5 +0.2/-0		
106284-0002	106284-1002	106284-7002		2.0 +0.2/-0		
106284-0003	106284-1003	106284-7003		3.0 +0.2/-0		
106284-0004	106284-1004	106284-7004		4.0 +0.2/-0		
106284-0005	106284-1005	106284-7005		5.0 +0.2/-0		
106284-0006	106284-1006	106284-7006		6.0 +0.2/-0		
106284-0008	106284-1008	106284-7008		8.0 +0.2/-0		
106284-0010	106284-1010	106284-7010		10.0 +0.3/-0		
106284-0012	106284-1012	106284-7012		12.0 +0.3/-0		
106284-0015	106284-1015	106284-7015		15.0 +0.3/-0		
106284-0020	106284-1020	106284-7020		20.0 +0.4/-0		
106284-0025	106284-1025	106284-7025		25.0 +0.5/-0		
106284-0030	106284-1030	106284-7030		30.0 +0.6/-0		
106284-0035	106284-1035	106284-7035		35.0 +0.7/-0		
106284-0040	106284-1040	106284-7040		40.0 +0.8/-0		
106284-0045	106284-1045	106284-7045		45.0 +0.9/-0		
106284-0050	106284-1050	106284-7050		50.0 +1.0/-0		
106284-0055	106284-1055	106284-7055		55.0 +1.1/-0		
106284-0060	106284-1060	106284-7060		60.0 +1.2/-0		
106284-0065	106284-1065	106284-7065		65.0 +1.3/-0		
106284-0070	106284-1070	106284-7070		70.0 +1.4/-0		
106284-0075	106284-1075	106284-7075		75.0 +1.5/-0		
106284-0080	106284-1080	106284-7080		80.0 +1.6/-0		
106284-0085	106284-1085	106284-7085		85.0 +1.7/-0		
106284-0090	106284-1090	106284-7090		90.0 +1.8/-0		
106284-0095	106284-1095	106284-7095		95.0 +1.9/-0		
106284-0100	106284-1100	106284-7100		100.0 +2.0/-0		
106284-0150	106284-1150	106284-7150		150.0 +3.0/-0		

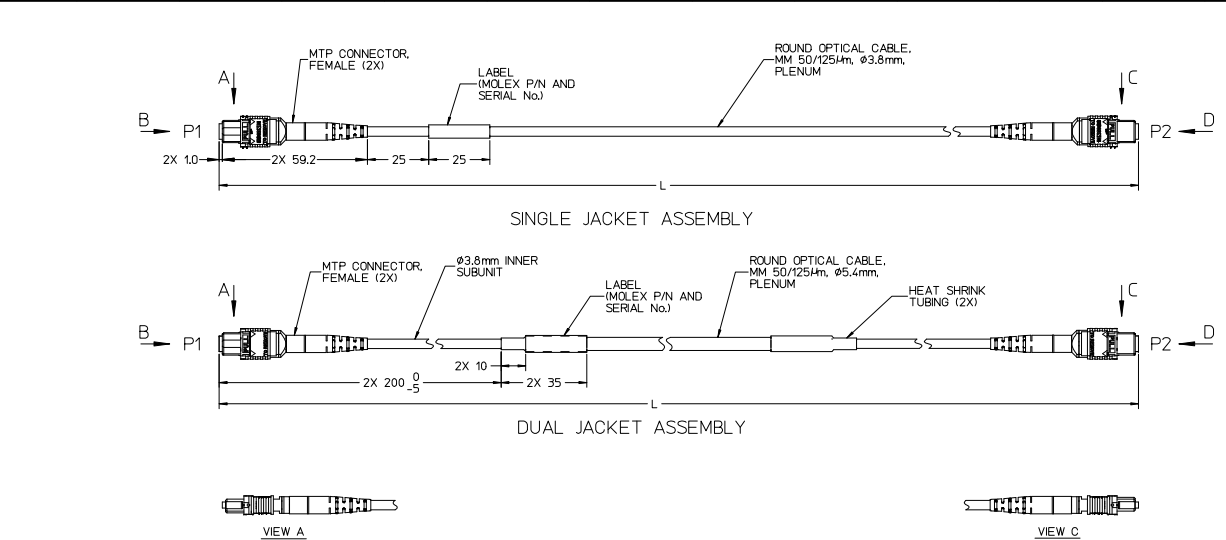

NOTE:
 CABLE ASSEMBLY SPECIFICATIONS:
 OPTICAL PROPERTIES
 FIBER TYPE MULTIMODE 50/125 μm BEND-INSENSITIVE
 CONNECTOR INSERTION LOSS (MAX.) 1.0 dB
 CABLE ATTENUATION (MAX.) 3.5/1.2 dB/km AT 850/1300 nm
 *BANDWIDTH SEE TABLE 1
 ENVIRONMENTAL PROPERTIES
 CONNECTOR MATERIALS UL94 V-0
 CABLE FLAMMABILITY RATING PLENUM OFNP (NFPA 262/UL 910)
 OPERATING TEMPERATURE RANGE -0°C TO +70°C
 MECHANICAL PROPERTIES
 FIBER COUNT 24F = 12 Rx / 12 Tx
 CABLE MIN. BEND RADIUS
 SHORT TERM 57 mm - SINGLE JACKET
 89 mm - DUAL JACKET
 LONG TERM 20 mm - SINGLE JACKET/INNER SUBUNIT OF DUAL JACKETED CABLE
 57 mm - DUAL JACKET
 NO LOAD 12.5 mm - SINGLE JACKET CABLE/INNER SUBUNIT OF DUAL JACKETED CABLE
 COMPRESSIVE FORCE, SINGLE JACKET OR INNER SUBUNIT OF DUAL JACKETED CABLE >3.5 N/mm

TABLE 1

FIBER TYPE	OVERFILLED LAUNCH BANDWIDTH, MIN. (MHz-km)		1 GIGABIT ETHERNET LINK DISTANCE, MIN. (m)		10 GIGABIT ETHERNET LINK DISTANCE, MIN. (m)		EFFECTIVE MODAL BANDWIDTH (MHz-km)
	850 nm	1300 nm	850 nm	1300 nm	850 nm	1300 nm	850 nm
STANDARD BANDWIDTH (OM2)	500	500	600	---	86	---	---
HIGH BANDWIDTH (OM3)	1500	500	1000	---	300	---	2000
HIGH BANDWIDTH (OM4)	3500	550	1040	---	550	---	4700

ENTER DESCRIPTION IEC NO. MF2012-0564 DRAWN BY: FU CHKD: APPR.: IJUMIN DATE: 2012/05/21	QUALITY SYMBOLS ▽=0 ▽=0		GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ±--- ±--- 3 PLACES ±--- ±--- 2 PLACES ±--- ±--- 1 PLACE ±--- ±--- 0 PLACE ±--- ±--- ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DIMENSION STYLE MM ONLY DRAWN BY: IJUMIN DATE: 2008/11/21 CHECKED BY: DATE:		SCALE 1:1 DESIGN UNITS INCH THIRD ANGLE PROJECTION		TITLE MOLEX CXP OPTICAL CABLE ASSEMBLY	
	MATERIAL NO. SEE TABLE		APPROVED BY: IJUMIN DATE: 2008/11/21		DOCUMENT NO. SD-106284-0001		SHEET NO. 1 OF 1			

CONNECTIONS	FROM P1	TO P2
Rx-1	Tx-1	
Rx-2	Tx-2	
Rx-3	Tx-3	
Rx-4	Tx-4	
Rx-5	Tx-5	
Rx-6	Tx-6	
Rx-7	Tx-7	
Rx-8	Tx-8	
Rx-9	Tx-9	
Rx-10	Tx-10	
Rx-11	Tx-11	
Rx-12	Tx-12	
Tx-1	Rx-1	
Tx-2	Rx-2	
Tx-3	Rx-3	
Tx-4	Rx-4	
Tx-5	Rx-5	
Tx-6	Rx-6	
Tx-7	Rx-7	
Tx-8	Rx-8	
Tx-9	Rx-9	
Tx-10	Rx-10	
Tx-11	Rx-11	
Tx-12	Rx-12	