




## 020131MB Series

### Specifications:

- **Insulator Material** : High Temp. Plastic
- **Max Processing Temp** : -40°C ~+85°
- **Terminal Material** : Phosphor Bronze
- **Plating** : Selective Gold Plated
- **Max. Current Rating** : 1.0A
- **Voltage Rating** : 30V AC
- **Dielectric Strength** : 500V (Min. 60 Seconds)

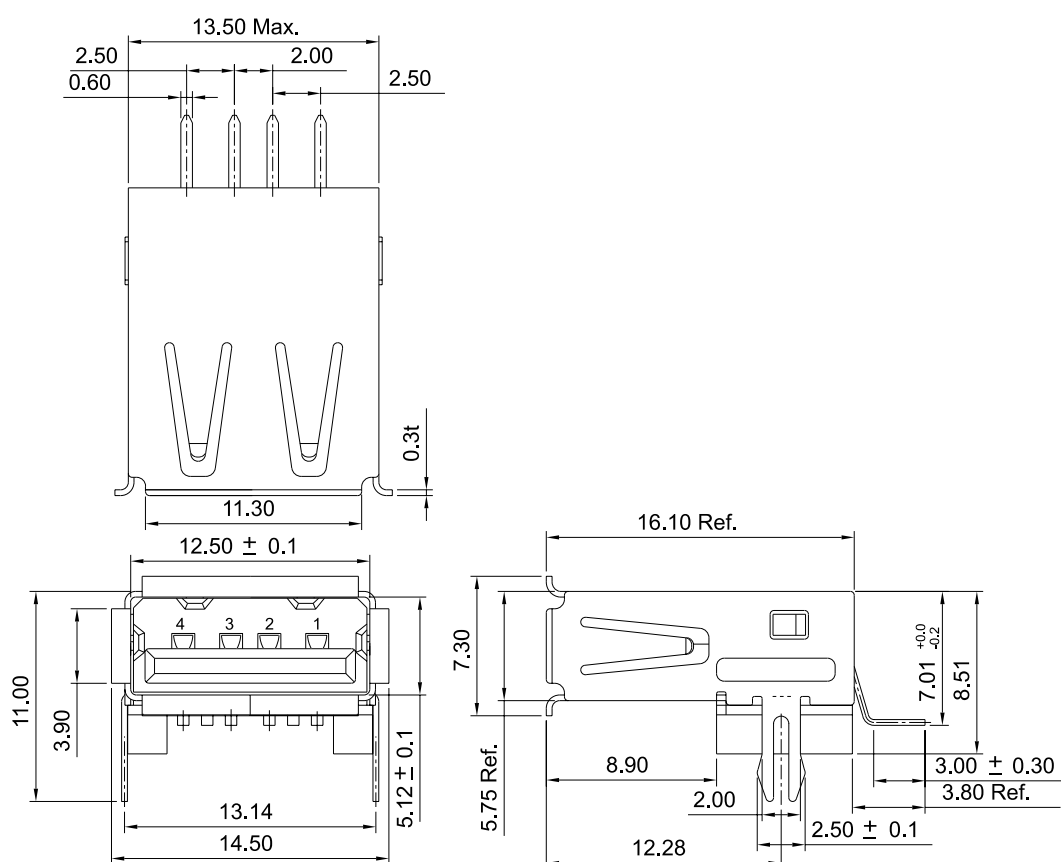

I/O

## Order Information

020131MB004S500ZU  
1 2 3 4 5

1. 'B' : Right Angle SMT Type
  2. No. of Pins
  3. Plating  
'S5' : 30u" selctive gold in contact area  
/min. 100u"fin solder area
  4. Color 'Z' : Black
  5. Package  
'U' : Tube Package without Cap
- Reference Page 11

## Recommended P.C.B Layout

