


SHEET 1 OF 1





PANEL MOUNTING




CIRCUIT: SPST
MOMENTARY

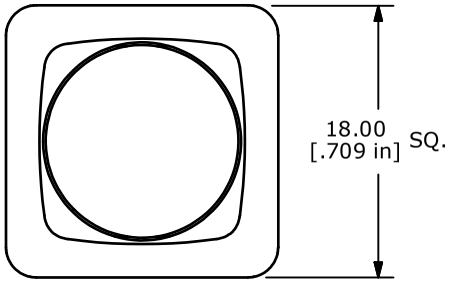



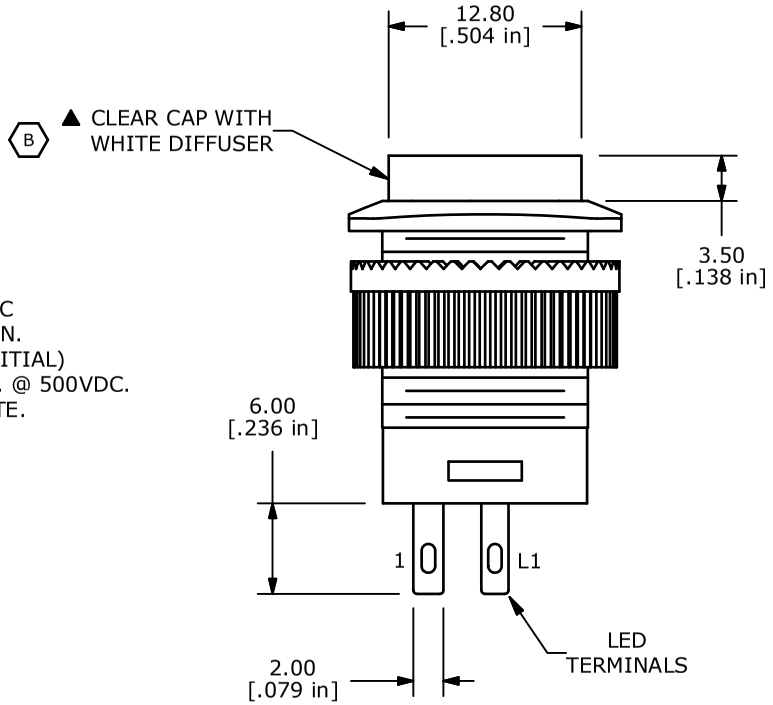

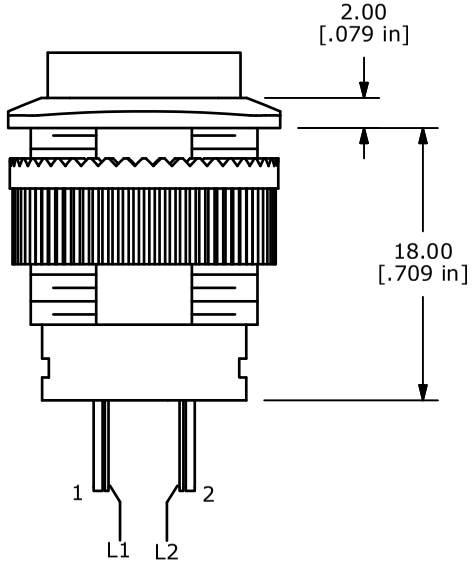

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CIRCUIT: SPST OFF-MOMENTARY ON
▲ 5. CONTACT RATING: 3A @ 125VAC, 1.5A @250VAC
6. ELECTRIC LIFE: 6,000 CYCLES AT FULL LOAD MIN.
7. CONTACT RESISTANCE: 50 MILLI-OHM MAX. (INITIAL)
8. INSULATION RESISTANCE: 100 MEGA-OHM MIN. @ 500VDC.
9. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE.
▲10. LED COLOR: BLUE
11. OPERATING TEMPERATURE: -0°C TO +65°C.
12. PANEL THICKNESS RANGE: 7.0 mm MAX.
13. ▲DENOTES CRITICAL PARAMETER.
14. 2002/95/EC (ROHS) COMPLIANT
15. HARDWARE INCLUDED: MOUNTING NUT

▲ LED SPECS	UNITS	BLUE
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	3.0-3.6
LUMINOUS INTENSITY	MCD	100

REV	PCR NO	DESCRIPTION	DATE	BY
C	19613	ADD LED SPECS	1/20/11	BGL
B	19453	EDIT CAP & DIFFUSER COLOR / DESCRIPT.	11/17/10	BMA
A	19370	Release for Production	11/3/10	rc

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH™

TITLE RP3508ABLKCLRBLUNS

SCALE	DATE	DR	DWG	REV
2 : 1	11/3/2010	RC	F130430	C