

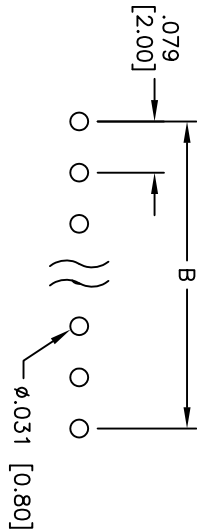
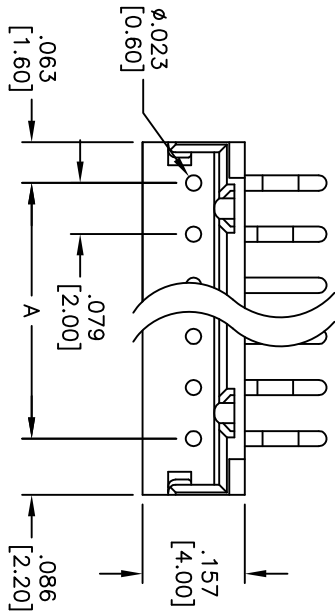


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/24/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

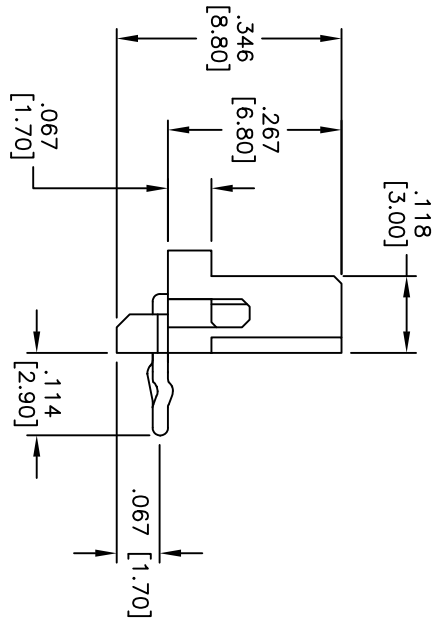

PCB LAYOUT

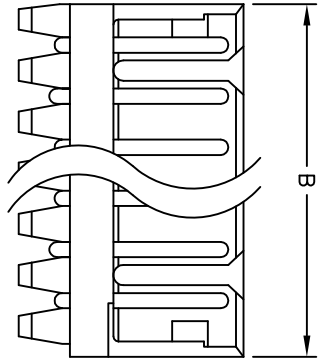

Positions: 2 thru 15  
 A = .079 [2.00] x No. of Positions - 1  
 B = .079 [2.00] x No. of Positions + .079 [2.00]

**SPECIFICATIONS:**

- Material: Insulator: Nylon 66, rated UL 94V-0
- Insulator color: Natural
- Contacts: Brass
- Plating: Tin over Copper underplate overall
- Electrical: Operating voltage: 100 VAC max
- Current rating: 2 Amps max
- Contact resistance: 10 mohms max
- Insulation resistance: 1,000 Mohms min @ 500 VDC
- Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating: Operating temperature: -25°C to +85°C
- Environmental: Lead free, RoHS compliant



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] SHROUDED HEADER  
 RIGHT ANGLE, PCB

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TITLE	
TOLERANCES: EXCEPT AS NOTED	INCHES	SIZE	PART NO.
.X ± .10	ØXX ± .10	X	2SH-D-XX-TR
.XX ± .020	ØXXX ± .015	CHECKED	
.XXX ± .015	ØXXXX ± .010	APPROVED	
APPROVALS	DATE	REF:	SCALE: NTS
DRAWN AY	10/24/11		SHEET 1 OF 1
			REV. -