
5 x 20 mm Time Lag Fuse (Slo-Blo® Fuse) 215/221 Series

- Designed to International (IEC) Standards for use globally.
- Meets the IEC 60127-2, Sheet 5 specification for Time Lag Fuses.
- Available in Cartridge and Axial Lead Form.
- Available in ratings of .2 to 10 amperes.
- High breaking capacity.

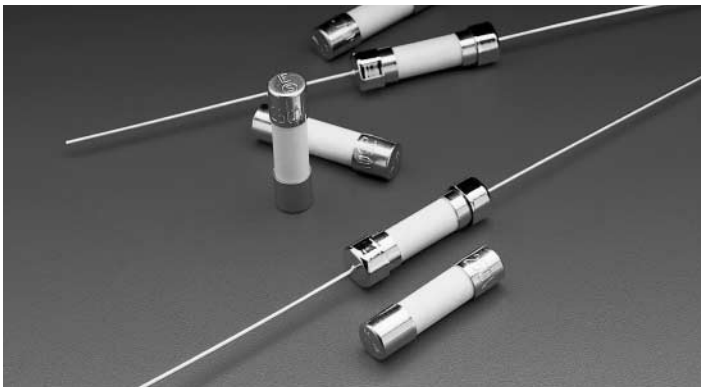

ELECTRICAL CHARACTERISTICS:

% of Ampere Rating	Ampere Rating	Opening Time
150%	1–3.15	60 minutes, **Min**imum
	4–6.3	60 minutes, **Min**imum
210%	1–3.15	30 minutes, **Max**imum
	4–6.3	30 minutes, **Max**imum
275%	1–3.15	1 sec., **Min.**; 80 sec. **Max.**
	4–6.3	1 sec., **Min.**; 80 sec. **Max.**
400%	1–3.15	.095 sec., **Min.**; 5 sec. **Max.**
	4–6.3	.150 sec., **Min.**; 5 sec. **Max.**
1000%	.2–.4	.010 sec., **Min.**; .15 sec., **Max.**
	.5–3.15	.010 sec., **Min.**; .1 sec., **Max.**
	4–6.3	.020 sec., **Min.**; .1 sec. **Max.**

AGENCY APPROVALS: Sheet V IEC 60127-2:* SEMKO approved 1A-6.3A. BSI and VDE approved 1.0-6.3 amps. METI approved 1-10A. Recognized under the Components Program of Underwriters Laboratories and recognized by CSA.

INTERRUPTING RATING: 1500 amperes.


ORDERING INFORMATION:

Cartridge Catalog Number	Axial Lead Catalog Number	Ampere Rating	Voltage Rating	Nominal Resistance Cold Ohms	Nominal Melting I^2t A^2 Sec.
215.200	**221**.200	.200*	250	1.750	0.37
215.250	**221**.250	.250*	250	1.170	0.56
215.315	**221**.315	.315*	250	0.873	1.08
215.400	**221**.400	.400*	250	0.560	1.45
215.500	**221**.500	.500*	250	1.080	0.34
215.630	**221**.630	.630*	250	0.660	0.56
215.800	**221**.800	.800*	250	0.436	0.954
215 001	**221** 001	1	250	0.110	1.05
215 1.25	**221** 1.25	1.25	250	0.085	2.05
215 01.6	**221** 01.6	1.6	250	0.0588	3.90
215 002	**221** 002	2	250	0.043	6.95
215 02.5	**221** 02.5	2.5	250	0.0312	10.65
215 3.15	**221** 3.15	3.15	250	0.0220	21.2
215 004	**221** 004	4	250	0.0163	38.7
215 005	**221** 005	5	250	0.0125	82.85
215 06.3	**221** 06.3	6.3	250	0.0099	132.5
215 008	**221** 008	8*	250	0.0078	209.5
215 010	**221** 010	10*	250	0.0060	360.5


*IEC Standards for 5 x 20mm fuses do not include ratings above 6.3 amperes, but are under consideration.

IEC 60127-2, Sheet 5 does not include ratings below 1 ampere (under consideration by IEC).

215 000 **215 000 XE** **221 000**[1] **215 000 XW**



Average Time Current Curves

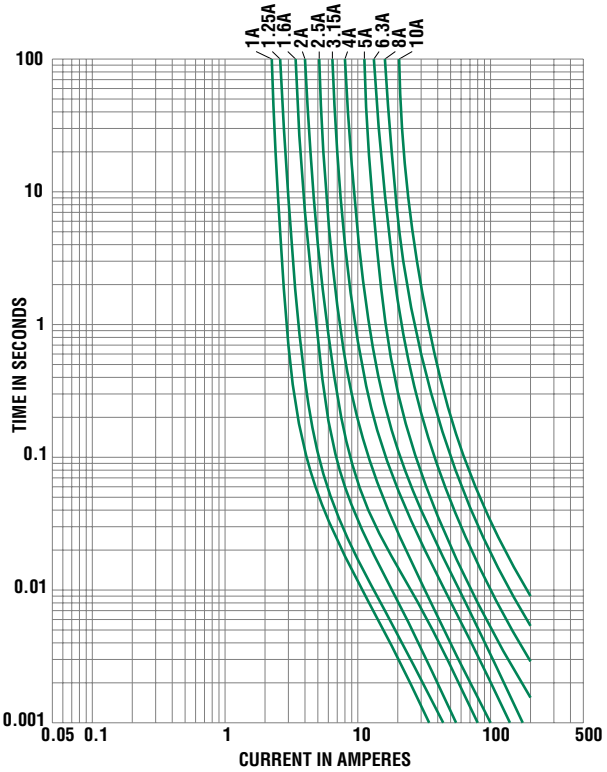

[1] 221 Series is used for North American ordering.