

## HC-B 16-TMB-SD-IP65

Order No.: 1690956

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1690956>

HEAVYCON ADVANCE IP65 protective cover B16, with bayonet locking, with retaining cord, diameter of retaining cord eyelet 3 mm

### Commercial data

|                          |                                                                                    |
|--------------------------|------------------------------------------------------------------------------------|
| GTIN (EAN)               |  |
| sales group              | D291                                                                               |
| Pack                     | 10 pcs.                                                                            |
| Customs tariff           | 39269097                                                                           |
| Catalog page information | Page 551 (PC-2009)                                                                 |

### Product notes

WEEE/RoHS-compliant since:  
03/09/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data


#### General data

|                      |                             |
|----------------------|-----------------------------|
| Design               | B16                         |
| Type                 | HC-ADVANCE protective cover |
| Color                | gray                        |
| Locking type         | Bayonet locking             |
| Degree of protection | IP65                        |

|                                    |                                 |
|------------------------------------|---------------------------------|
| Ambient temperature (operation)    | -20 °C ... 100 °C               |
| Seal material                      | NBR                             |
| Material lock                      | High-grade steel, handle: PA-GF |
| Material, protective cover         | PA                              |
| Inflammability class acc. to UL 94 | V0                              |

#### Diagrams/Drawings

##### Dimensioned drawing

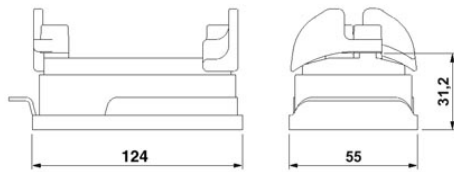

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;