


**DIMENSIONS**

All dimensions in mm [inches]

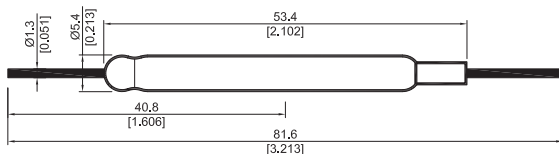

**CHARACTERISTICS**

- Glass length of 53.4 mm and diameter of 5.4 mm
- Normally open 1 Form A contact
- Copper-plated RF switch
- Insulation voltage up to 9 kVDC possible
- Carry current 5 A
- Suitable for numerous RF applications

**CONTACT DATA**

All Data at 20 °C	Switch Model → Contact Form →	KSK-1A54-... Form A			
Contact Ratings	Conditions	Min.	Typ.	Max.	Units
Switching Power*	Any DC combination of V and A not			25	W
Switching Voltage	DC or peak AC			500	V
Switching Current	DC or peak AC			1.5	A
Carry Current	DC or peak AC			5.0	A
Static Contact Resistance	at 0.5 V & 10 mA			150	mΩ
Dynamic Contact Resistance	measured w/ 0.5 V & 50 mA, 1.5 ms after closure			200	mΩ
Insulation Resistance cross Contacts	100 Volts applied	10 <sup>10</sup>			Ω
Breakdown Voltage	> 60 sec.	5			kVDC
Release Time incl. Bounce	100 % overdrive			3.0	ms
Release Time	measured with/ no coil suppression			1.5	ms
Capacitance	at 10 kHz across contact		2.5		pF
Test Coil **		KMS-05			
Standard AT range		60		125	AT
Environmental Data					
Shock Resistance	1/2 sine wave for 11 ms			50	g
Vibration Resistance	10 - 2000 Hz			20	g
Ambient Temperature	max. 10 °C / minute allowance	-20		130	°C
Stock Temperature	max. 10 °C / minute allowance	-55		130	°C
Soldering Temperature	5 sec. dwell			260	°C
Note: The indicated electric data are maximum values can vary downwards when using a more sensitive switch. * For life expectancy see our test section on Page 112. ** See our test section on Page 116.					

**ORDER INFORMATION**

Series	Contact Form	Switch Model	At Range (between)
KSK -	1A	54 -	xxxx
Options			60 - 125

**Part Number Example - KSK - 1A54 - 100105**

**100105** is the AT range (Any AT can be ordered between 60 & 125 in a minimum range of 5 AT)