
Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

KD421210A7

Dual Darlington Transistor Module


100 Amperes/1200 Volts

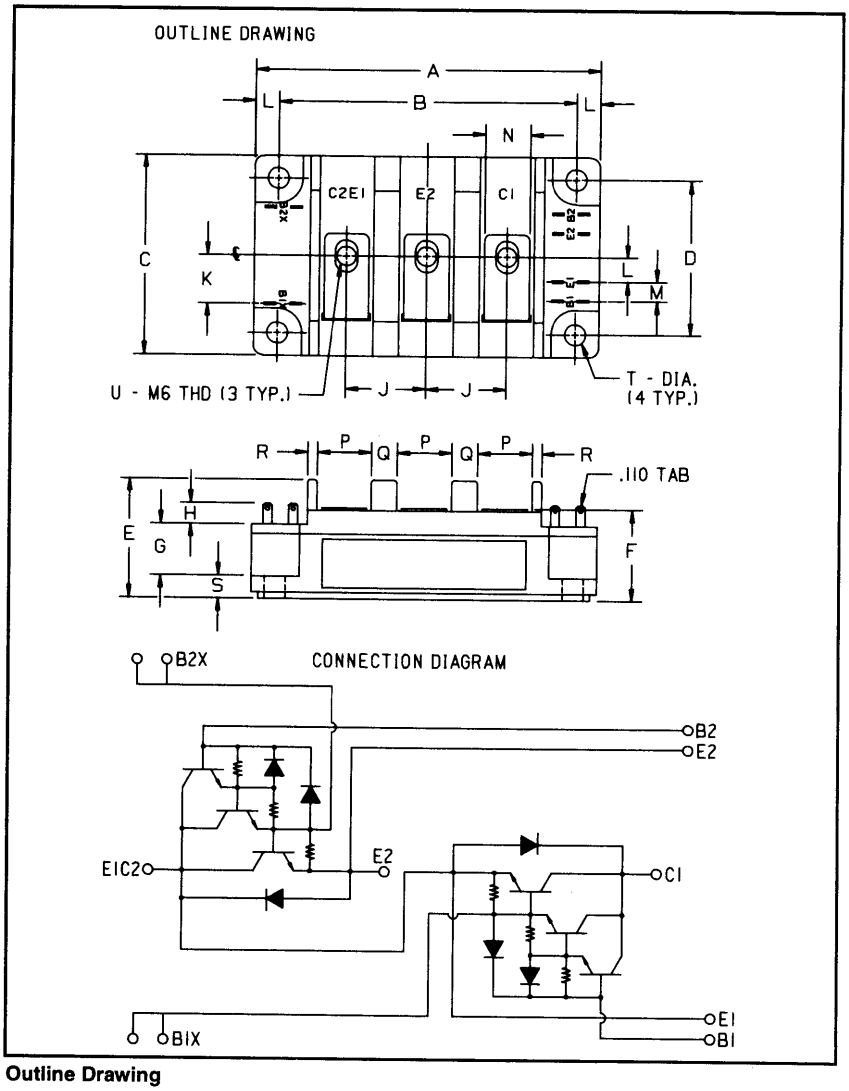

Outline Drawing

Dimensions	Inches	Millimeters
A	4.252 Max.	108 Max.
B	3.661 ± 0.012	93 ± 0.3
C	2.441 Max.	62 Max.
D	1.890 ± 0.012	48 ± 0.3
E	1.457	37
F	1.181 Max.	30 Max.
G	0.630	16
H	0.256 Min.	6.5 Min.
J	0.984	25
K	0.591	15

Dimensions	Inches	Millimeters
L	0.295	7.5
M	0.236	6
N	0.551	14
P	0.669	17
Q	0.315	8
R	0.118	3
S	0.276	7
T	0.256 Dia.	6.5 Dia.
U	M6 Metric	M6

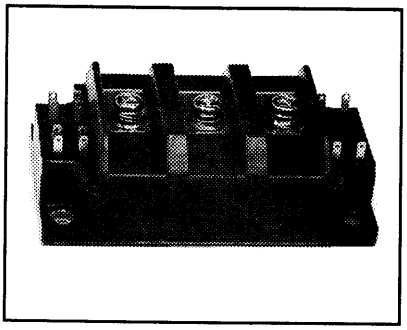

Description:
The Powerex Dual Darlington Transistor Modules are high power devices designed for use in switching applications. The modules are isolated, consisting of two Darlington Transistors with each transistor having a reverse parallel connected high-speed diode.

Features:
- ☐ Isolated Mounting
- ☐ Planar Chips
- ☐ Discrete Fast Recovery Feedback Diode
- ☐ High Gain (h_{FE})
- ☐ Quick Connect Base-Emitter Signal Terminals
- ☐ Base-Emitter Speed-up Diodes

Applications:
- ☐ AC Motor Control
- ☐ DC Motor Control
- ☐ Switching Power Supplies
- ☐ Inverters

Ordering Information:
Example: Select the complete ten digit module part number you desire from the table - i.e. KD421210A7 is a 1200 Volt, 100 Ampere Dual Darlington Module with a gain of 100 at rated current (100 Amperes).

Type	$V_{CEO(sus)}$ Volts (X 100)	Current Rating Amperes (X 10)
KD42	12	10

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

KD421210A7
Dual Darlington Transistor Module
100 Amperes/1200 Volts

Absolute Maximum Ratings, T_j = 25 °C unless otherwise specified

Ratings	Symbol	KD421210A7	Units
Junction Temperature	T_j	-40 to 150	°C
Storage Temperature	T_{stg}	-40 to 125	°C
Collector-Emitter Sustaining Voltage, V_{BE} = -2V	$V_{CEV(sus)}$	1200	Volts
Collector-Base Voltage	V_{CBO}	1200	Volts
Emitter-Base Voltage	V_{EBO}	7	Volts
Collector-Emitter Voltage, V_{BE} = -2V	V_{CEV}	1200	Volts
Continuous Collector Current	I_C	100	Amperes
Diode Forward Current	I_{FM}	100	Amperes
Continuous Base Current	I_B	5	Amperes
Diode Surge Current	I_{FSM}	1000	Amperes
Power Dissipation (Each Transistor)	P_t	800	Watts
Max. Mounting Torque M6 Terminal Screws	–	26	in.-lb.
Max. Mounting Torque M6 Mounting Screws	–	26	in.-lb.
Module Weight (Typical)	–	470	Grams
V Isolation	V_{RMS}	2500	Volts

Electrical Characteristics, T_j = 25 °C unless otherwise specified

Characteristics		Symbol	Test Conditions	Min.	Typ.	Max.	Units
Collector Cutoff Current		I_{CEV}	V_{CE} = 1200V, V_{BE} = -2V	–	–	2	mA
Emitter Cutoff Current		I_{EBO}	V_{EB} = 7V	–	–	400	mA
DC Current Gain		h_{FE}	I_C = 100A, V_{CE} = 5V	75	–	–	–
Diode Forward Voltage		V_{FM}	I_{FM} = 100A	–	–	1.8	Volts
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	I_C = 100A, I_B = 2A	–	–	3.0	Volts
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	I_C = 100A, I_B = 2A	–	–	3.5	Volts
Resistive	Turn-on	t_{on}	V_{CC} = 600V	–	–	3.0	µs
Load	Storage Time	t_s	I_C = 100A	–	–	15	µs
Switch Times	Fall Time	t_f	I_{B1} = -I_{B2} = 2A	–	–	3.0	µs


Thermal and Mechanical Characteristics, T_j = 25 °C unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance, Case-to-Sink	$R_{\theta(c-s)}$	Per Half Module	–	–	0.075	°C/W
Thermal Resistance, Junction-to-Case	$R_{\theta(j-c)}$	Transistor Part	–	–	0.155	°C/W
Thermal Resistance, Junction-to-Case	$R_{\theta(j-c)}$	Diode Part	–	–	0.65	°C/W


Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

KD421210A7
Dual Darlington Transistor Module
100 Amperes/1200 Volts


DC CURRENT GAIN (TYPICAL)

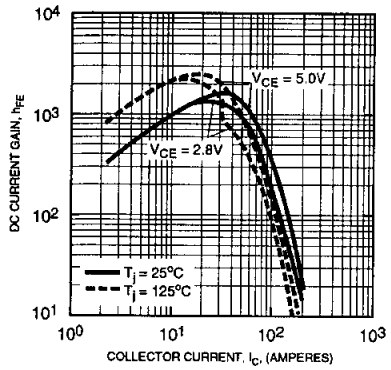


SATURATION VOLTAGE (TYPICAL)

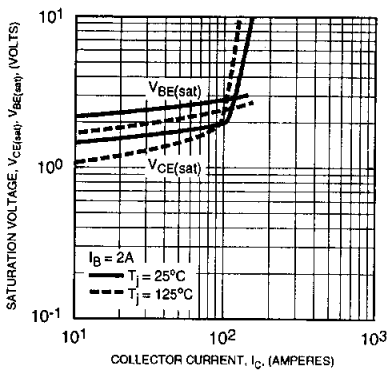


COMMON EMITTER OUTPUT CHARACTERISTICS (TYPICAL)

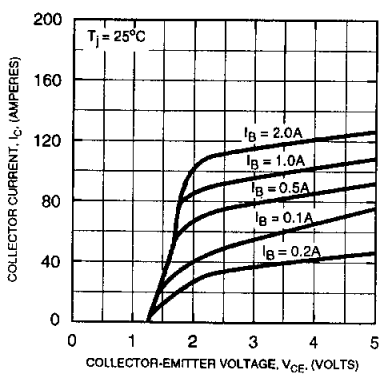


COMMON EMITTER INPUT CHARACTERISTICS (TYPICAL)

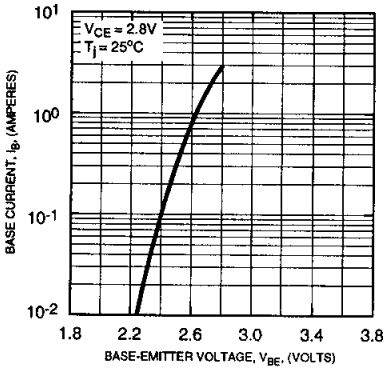


SWITCHING CHARACTERISTICS (TYPICAL)

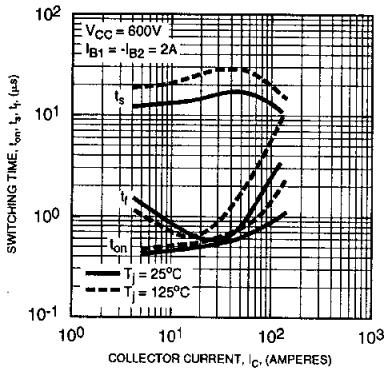


COLLECTOR-EMITTER SATURATION VOLTAGE (TYPICAL)

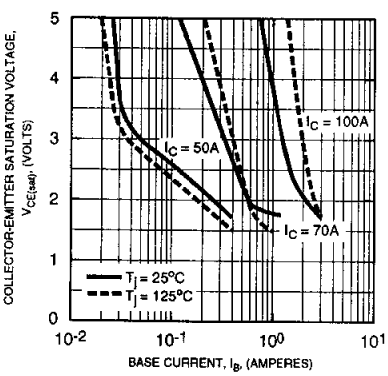


SWITCHING TIME VS. BASE CURRENT (TYPICAL)

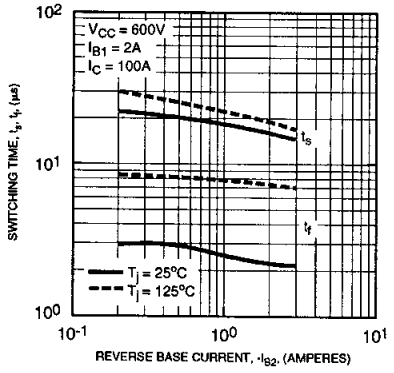

DIODE CHARACTERISTICS (TYPICAL)

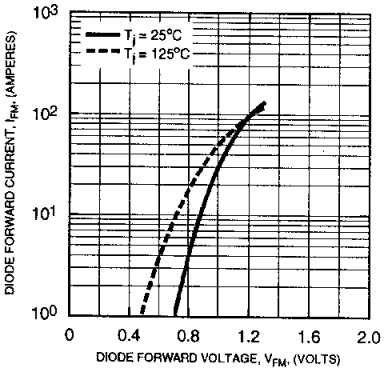


REVERSE BIAS SAFE OPERATING AREA (RBSOA)

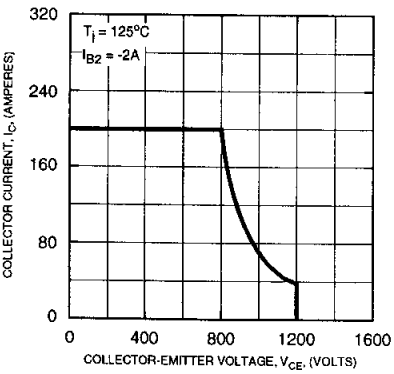


Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

KD421210A7
Dual Darlington Transistor Module
100 Amperes/1200 Volts


FORWARD BIAS SAFE OPERATING AREA (SOA)

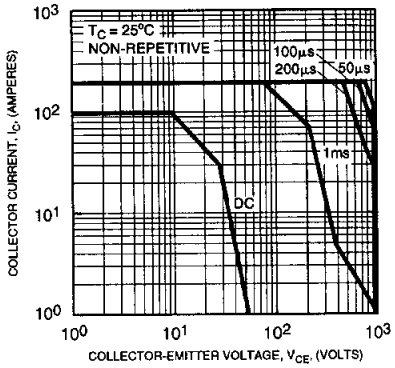


DERATING FACTOR OF SAFE OPERATING AREA (SOA)

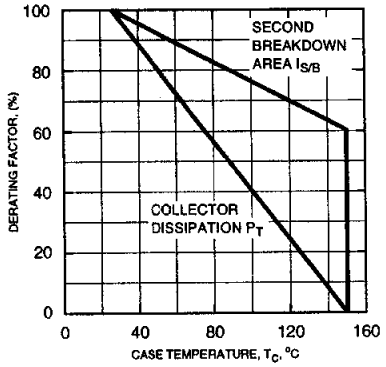


REVERSE RECOVERY CHARACTERISTICS OF FREE-WHEEL DIODE (TYPICAL)

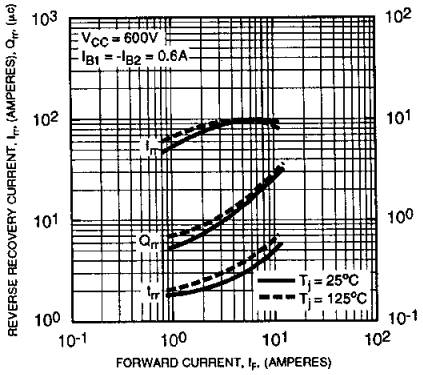

DIODE FORWARD SURGE CURRENT

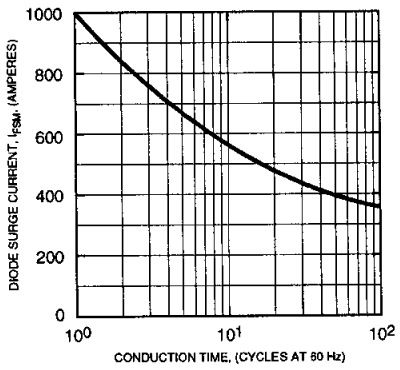

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (TRANSISTOR)

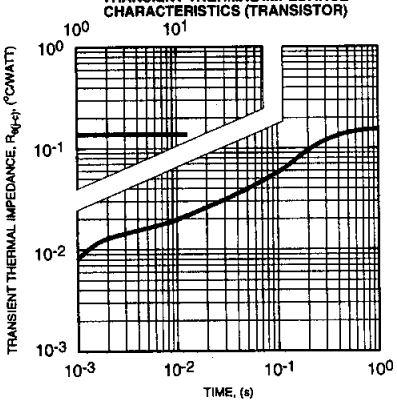

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (DIODE)

