
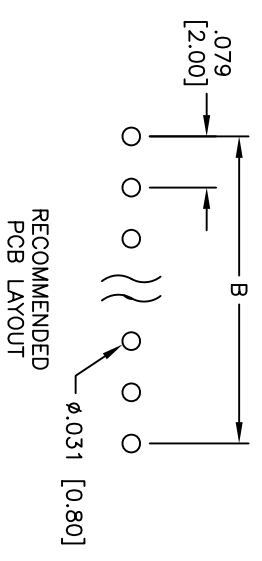
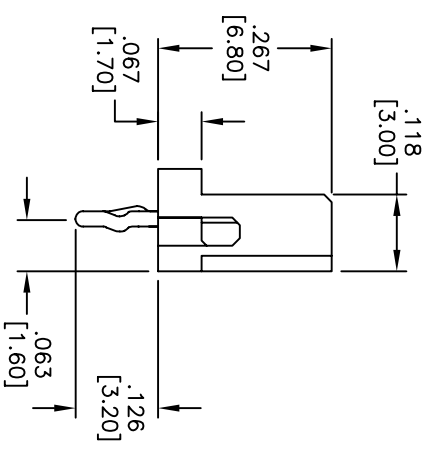
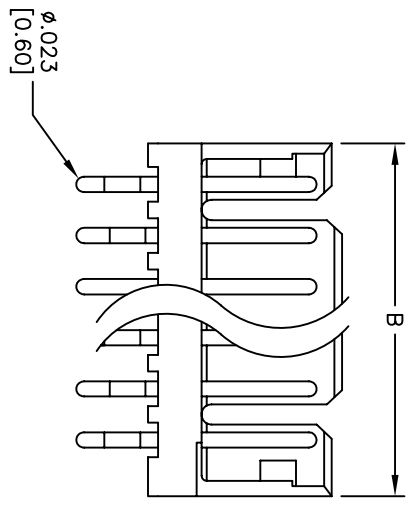


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/17/08	

APPROVED: _____
 DATE: _____ TITLE: _____

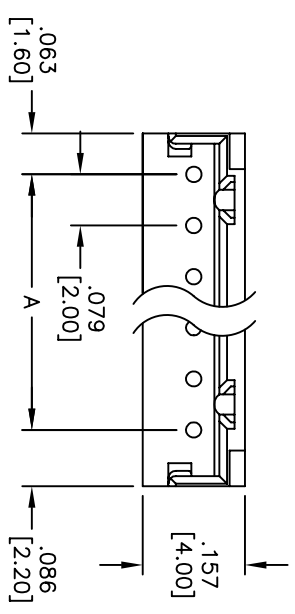

SPECIFICATIONS:
 Material: Nylon 66, rated UL 94V-0
 Insulator color: Natural
 Contacts: Brass
 Plating:
 Tin over Copper underplate overall

Electrical:
 Operating voltage: 100 VAC max
 Current rating: 2 Amps max
 Contact resistance: 10 mohms max
 Insulation resistance: 1,000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds



Positions: 2 thru 15
 A = .079 [2.00] x No. of Positions - 1
 B = .079 [2.00] x No. of Positions + .079 [2.00]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS	[MM]
.X ± .10	ØXX	± .10
.XX ± .020	ØXXX	± .015
.XXX ± .015	ØXXXX	± .010

APPROVALS

DATE	DATE

DRAWN	SS	3/17/08
CHECKED		
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 [2.00] SHRROUDED HEADER
 RIGHT ANGLE, PCB

SIZE	PART NO.	SCALE	SHEET	REV.
X	2SH-D-XX-TS	NTS	1 OF 1	