

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0022011062](#)
Status: **Active**
Overview: [kk](#)
Description: 2.50mm (.098") Pitch KK® Wire-to-Board Housing, Female, Friction Lock, for 2759/5159 Crimp Terminals, 6 Circuits

Documents:

- [3D Model](#)
[Drawing \(PDF\)](#)
[Product Specification PS-5045-001 \(PDF\)](#)
[Product Specification PS-5045-002 \(PDF\)](#)
[Product Specification PS-5045-003 \(PDF\)](#)
[Product Specification PS-5045-004 \(PDF\)](#)
[Product Specification PS-5046-004 \(PDF\)](#)
- [Product Specification PS-5051-001 \(PDF\)](#)
[Product Specification PS-5051-002 \(PDF\)](#)
[Product Specification PS-5051-003 \(PDF\)](#)
[Product Specification PS-5051-004 \(PDF\)](#)
[Product Specification PS-5102-004 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA	LR19980
TUV	R72090224
UL	E29179

General

Product Family	Crimp Housings
Series	5051
Overview	kk
Product Name	KK®

Physical


Circuits (maximum)	6
Color - Resin	Natural
Flammability	94V-0
Gender	Female
Glow-Wire Compliant	No
Material - Resin	Nylon
Number of Rows	1
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.098 In
Pitch - Mating Interface (mm)	2.50 mm
Stackable	No
Temperature Range - Operating	-40°C to +105°C

Material Info

Old Part Number	5051-06
-----------------	---------

Reference - Drawing Numbers

Packaging Specification	SPK-5051-001
Product Specification	PS-5045-001, PS-5045-002, PS-5045-003, PS-5045-004, PS-5046-004, PS-5051-001, PS-5051-002, PS-5051-003, PS-5051-004, PS-5102-004
Sales Drawing	SD-5051-001

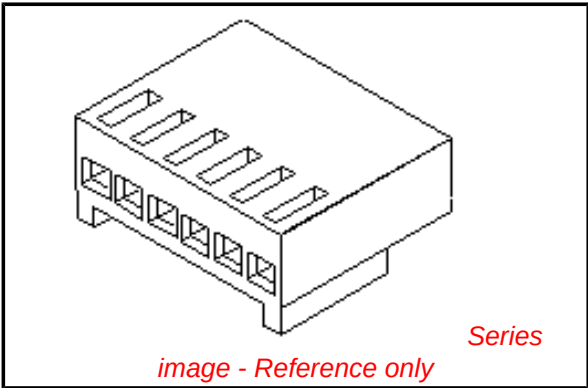

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Contains SVHC: No
**Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series




[5051](#)Series

Mates With

[5045](#) Vertical Header, [5046](#) Right Angle Header

Use With

[2759](#) , [5159](#)

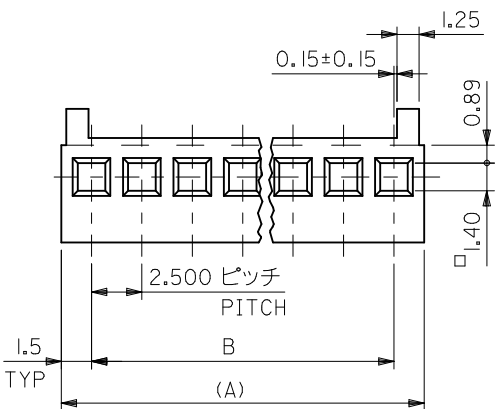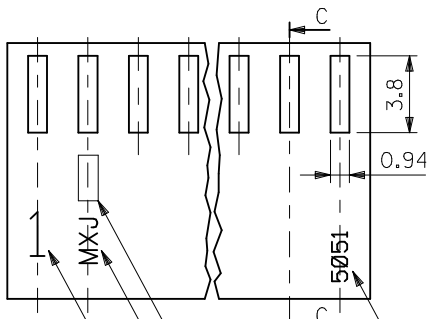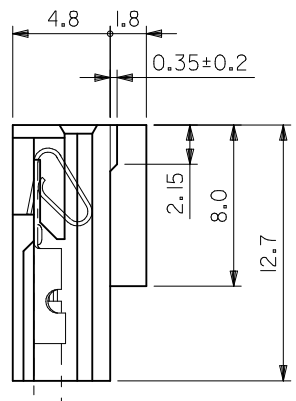

注)
NOTE.

1. そりは長さ25.4mmに対して0.2mmMAX.
CAMBER MUST BE WITHIN 0.2 MAX. PER 25.4.

2. () 寸法は参考値
DIMENSION SHOWN IN () ARE REFERENCE.

3. サークット NO. 1のみ表示 但し2極の場合は
MX-Jマーク側が1となる
WHEN 2 CIRCUITS HOUSING TRADE MARK SIDE IN NO.1 CIRCUIT.

MT'L. NYLON 66(94V-0)					
5051-16	22-01-1162	16	37.50±0.25	40.50	
↑ -15	↑ -1152	15	35.00±0.20	38.00	
-14	-1142	14	32.50±0.20	35.50	
-13	-1132	13	30.00±0.20	33.00	
-12	-1122	12	27.50±0.20	30.50	
-11	-1112	11	25.00±0.15	28.00	
-10	-1102	10	22.50±0.15	25.50	
-09	-1092	9	20.00±0.15	23.00	
-08	-1082	8	17.50±0.15	20.50	
-07	-1072	7	15.00±0.15	18.00	
-06	-1062	6	12.50±0.10	15.50	
-05	-1052	5	10.00±0.10	13.00	
-04	-1042	4	7.50±0.10	10.50	
↓ -03	↓ -1032	3	5.00±0.10	8.00	
5051-02	22-01-1022	2	2.50±0.08	5.50	
MATERIAL NO.	PART NO.	極数 N	B	(A)	
				MODEL NO.	5051-N

REVISED EC NO: J2010-1867 DRWRTSUKA 2010/03/19 CHKD:THARUYAMA 2010/03/23 APPR:HIRATA 2010/03/23	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	TITLE 2.50/(.098) CENTERS KK POLZG HSG		
		10 UNDER	± 0.25	DRAWN BY K. KOHAMA	DATE '00/3/28	DOCUMENT NO. SD-5051-001					
		10 OVER 30 UNDER	± 0.3	CHECKED BY T. YAMAGUCHI	DATE '00/3/30						
		30 OVER	± 0.35	APPROVED BY M. FUKUSHIMA	DATE '00/3/30					MOLEX INCORPORATED	
		ANGULAR ±3 °	MATERIAL NO. SEE TABLE								
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					SHEET NO. 1 OF 1	
	REV										