

P10MU-xxxxE/Z(Hxx)LF



PM3-SERIES

Rev.11-2008

- ✓ 2 Watt
- ✓ Unregulated
- ✓ **Single** and **Dual** Output
- ✓ **DIP14** Case
- ✓ **3 - 6 kV** DC I/O Isolation
- ✓ Low Ripple and Noise

The PM3 series P10MU-xxxxE/Z(Hxx)LF is a family of cost effective 2 W single & dual output DC-DC converters. These converters are in an ultra miniature DIP14 case. Devices are encapsulated. High performance features: 3000VDC up to 6000VDC input/output isolation, high efficiency operation, output voltage accuracy of $\pm 3\%$ maximum, input range of $\pm 10\%$ tolerance and low output ripple and noise.

All specifications typical at $T_a=25^\circ\text{C}$, nominal input voltage and full load unless otherwise specified

Input Specifications

Voltage Range	$\pm 10\%$
Input Filter	Capacitor
Input Reflected Ripple Current ¹	20 mA pk-pk

Output Specifications

Voltage Accuracy	$\pm 3\%$
Short Circuit Protection	Short Term
Line Regulation	$\pm 1.2\% / 1\% V_{in}$ Change
Load Regulation (20% - 100%)	$\pm 10\%$ (3.3 Vout Models: $\pm 20\%$)
Ripple and Noise (20Mhz bandwidth)	75 mV pk-pk
Temperature Coefficient	$\pm 0.02\% / ^\circ\text{C}$

General Specifications

Efficiency	See table
I/O Isolation Voltage (3 sec.)	3000 VDC (up to 6000 VDC optional)*
I/O Isolation Capacity	60 pF, typ.
I/O Isolation Resistance	1000 M Ohm
Switching Frequency	80 kHz (Variable)
Humidity	95% rel H
Reliability Calculated MTBF (MIL-HDBK-217F)	>1.121 Mhrs

Physical Specifications

Case Material	Non Conductive Black Plastic (UL94V-0 rated)
Potting Material	Epoxy (UL94V-0 rated)
Weight	~ 2.6g, typ.

Environment Specifications

Operating Temperature	-40 to +85 $^\circ\text{C}$ (ambient)
Maximum Case Temperature	100 $^\circ\text{C}$
Storage Temperature	-40 to +125 $^\circ\text{C}$
Cooling	Free Air Convection
RoHS Conform	Soldering 260 $^\circ\text{C}$, max. (1.5mm from case 10s.)

Selection Guide

Single Output

Order #	Input Voltage (VDC)	Input Current No Load (mA)	Input Current Full Load (mA)	Output Voltage (VDC)	Output Current Full Load (mA)	Efficiency (%)	Capacitor Load (uF) ²
SINGLE OUTPUT							
P10MU-053R3ELF	5	30	367	3.3	400	72	470
P10MU-0505ELF	5	30	512	5	400	78	470
P10MU-057R2ELF	5	30	500	7.2	277.7	80	470
P10MU-0509ELF	5	30	500	9	222.2	80	470
P10MU-0512ELF	5	30	487	12	166.7	82	470
P10MU-0515ELF	5	30	487	15	133.3	82	470
P10MU-0518ELF	5	30	487	18	111.1	82	470
P10MU-0524ELF	5	30	487	24	83.3	82	470
P10MU-123R3ELF	12	20	152	3.3	400	72	470
P10MU-1205ELF	12	20	216	5	400	77	470
P10MU-127R2ELF	12	20	208	7.2	277.7	80	470
P10MU-1209ELF	12	20	208	9	222.2	80	470
P10MU-1212ELF	12	20	208	12	166.7	80	470
P10MU-1215ELF	12	20	208	15	133.3	80	470
P10MU-1218ELF	12	20	208	18	111.1	80	470
P10MU-1224ELF	12	20	208	24	83.3	80	470
P10MU-243R3ELF	24	10	76	3.3	400	72	470
P10MU-2405ELF	24	10	105	5	400	79	470
P10MU-247R2ELF	24	10	115	7.2	277.7	72	470
P10MU-2409ELF	24	10	104	9	222.2	80	470
P10MU-2412ELF	24	10	104	12	166.7	80	470
P10MU-2415ELF	24	10	104	15	133.3	80	470
P10MU-2418ELF	24	10	104	18	111.1	80	470
P10MU-2424ELF	24	10	104	24	83.3	80	470

If you need other specifications, please enquire.

***OPTIONS:**

H40 = 4000 VDC ISOLATION

H52 = 5200 VDC ISOLATION

H60 = 6000 VDC ISOLATION

For other I/O Isolation please see table on the left hand side and add
"Hxx" before LF
 (P10MU-2412EH**60**LF for **6KV**)

Selection Guide

Dual Output

Order #	Input Voltage (VDC)	Input Current No Load (mA)	Input Current Full Load (mA)	Output Voltage (VDC)	Output Current Full Load (mA)	Efficiency (%)	Capacitor Load (µF) ²
DUAL OUTPUT							
P10MU-053R3ZLF	5	30	406	± 3.3	± 200	65	± 220
P10MU-0505ZLF	5	30	555	± 5	± 200	72	± 220
P10MU-057R2ZLF	5	30	555	± 7.2	± 138.8	72	± 220
P10MU-0509ZLF	5	30	519	± 9	± 111.1	77	± 220
P10MU-0512ZLF	5	30	512	± 12	± 83.3	78	± 220
P10MU-0515ZLF	5	30	500	± 15	± 66.67	80	± 220
P10MU-0518ZLF	5	30	500	± 18	± 55.55	80	± 220
P10MU-0524ZLF	5	30	500	± 24	± 41.67	80	± 220
P10MU-123R3ZLF	12	20	164	± 3.3	± 200	67	± 220
P10MU-1205ZLF	12	20	222	± 5	± 200	75	± 220
P10MU-127R2ZLF	12	20	219	± 7.2	± 138.8	76	± 220
P10MU-1209ZLF	12	20	216	± 9	± 111.1	77	± 220
P10MU-1212ZLF	12	20	203	± 12	± 83.3	82	± 220
P10MU-1215ZLF	12	20	203	± 15	± 66.67	82	± 220
P10MU-1218ZLF	12	20	203	± 18	± 55.55	82	± 220
P10MU-1224ZLF	12	20	203	± 24	± 41.67	82	± 220
P10MU-243R3ZLF	24	10	80	± 3.3	± 200	68	± 220
P10MU-2405ZLF	24	10	111	± 5	± 200	75	± 220
P10MU-247R2ZLF	24	10	111	± 7.2	± 138.8	75	± 220
P10MU-2409ZLF	24	10	104	± 9	± 111.1	80	± 220
P10MU-2412ZLF	24	10	101	± 12	± 83.3	82	± 220
P10MU-2415ZLF	24	10	101	± 15	± 66.67	82	± 220
P10MU-2418ZLF	24	10	101	± 18	± 55.55	82	± 220
P10MU-2424ZLF	24	10	101	± 24	± 41.67	82	± 220


If you need other specifications, please enquire.

***OPTIONS:**

H40 = 4000 VDC ISOLATION
H52 = 5200 VDC ISOLATION
H60 = 6000 VDC ISOLATION




For other I/O Isolation please see table on the left hand side and add "Hxx" before LF
(P10MU-2412ZH60LF for 6KV)

Package / Pinning / Derating

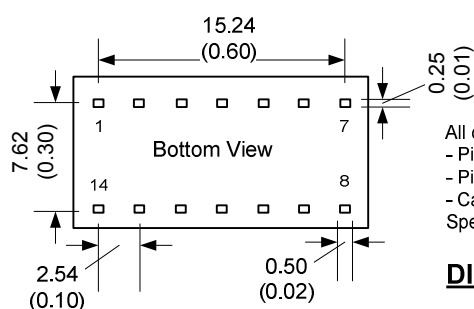

All dimensions are typical in millimeters (inches).
 - Pin diameter: 1.0 $\pm$ 0.05 (0.04 $\pm$ 0.002)
 - Pin pitch tolerance: $\pm$ 0.35 ($\pm$ 0.014)
 - Case tolerance $\pm$ 0.5 ($\pm$ 0.02)
 Specification may change without notice.

DIP14 – PLASTIC CASE

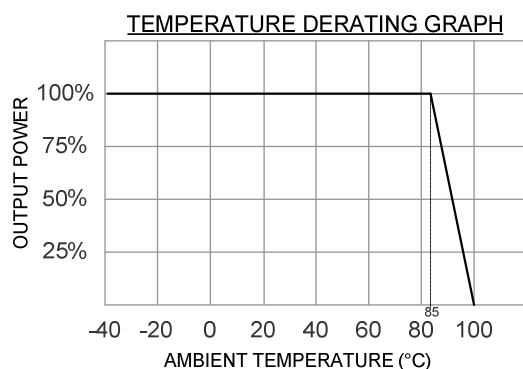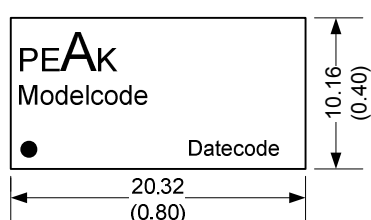

PIN CONNECTIONS		
#	SINGLE $\geq 3KV$	DUAL $\geq 3KV$
1	- Vin	- Vin
7	N.C.	N.C.
8	+Vout	+Vout
9	Omitted	Common
10	- Vout	- Vout
11	Omitted	Omitted
14	+Vin	+Vin

App Notes:

¹ = Measured Input reflected ripple current with a simulated source inductance of 12uH.

² = Tested by minimal Vin and constant resistive load.

- Operation under no-load conditions will not damage these devices, but they will not observe the listed specifications.
- For reduce converter's ripple & noise, it is recommended to add a 4.7 μ F~220 μ F ($\pm$ 4.7 μ F~ $\pm$ 100 μ F for dual output) capacitor in output end. For EMI performance improvement, it is recommended to add a 12 μ H inductor and a 10 μ F~100 μ F capacitor in input end.

