



GBU6005G THRU GBU610G


SINGLE PHASE 6.0 AMP GLASS PASSIVATED BRIDGE RECTIFIER

Features

- Glass passivated die construction
- Low forward voltage drop
- High current capability
- High surge current capability
- Plastic material-UL flammability 94V-0

Mechanical Data

- Case: G B U , molded plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: As Marked on Case
- Mounting Position: Any
- Marking: Type Number
- Lead Free: For RoHS / Lead Free Version

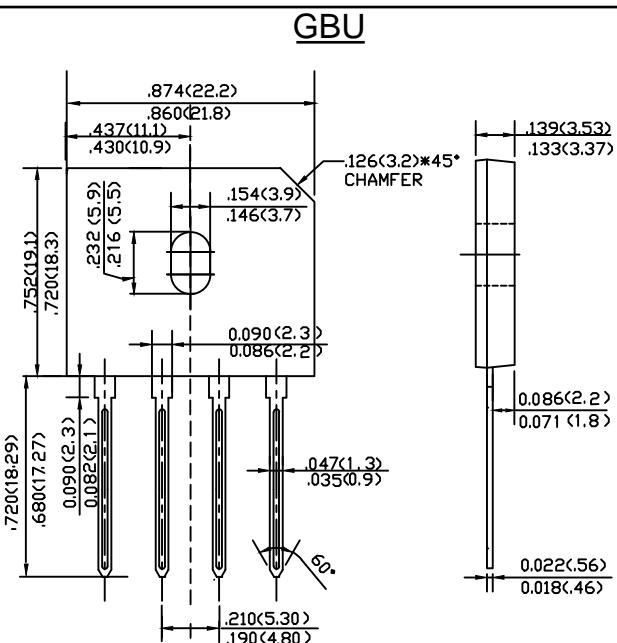

dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single Phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

TYPE NUMBER	SYMBOL	GBU 6005G	GBU 601G	GBU 602G	GBU 604G	GBU 606G	GBU 608G	GBU 610G	UNITS
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RPM}	50	100	200	400	600	800	1000	V
	V _{RWM}								
	V _{DC}								
RMS Reverse Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Average Rectified Output Current (Note 1)@T _A =40°C	I _O	6.0							A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	150							A
Forward Voltage per element @IF=3A @IF=6A	V _{FM}	1.0 1.1							V
Peak Reverse Current @T _A =25 °C At Rated DC Blocking Voltage @T _A =125 °C	I _R	5.0 500							uA
Typical Junction Capacitance per leg	C _J	65							pF
Typical Thermal Resistance per leg (Note 2)	R _{θJA}	17							°C/W
	R _{θJL}	2.2							
Operating and Storage Temperature Range	T _J , T _{STG}	-55to+150							°C

Note:1. Mounted on glass epoxy PC board with 1.3mm² solder pad.

2. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.

