
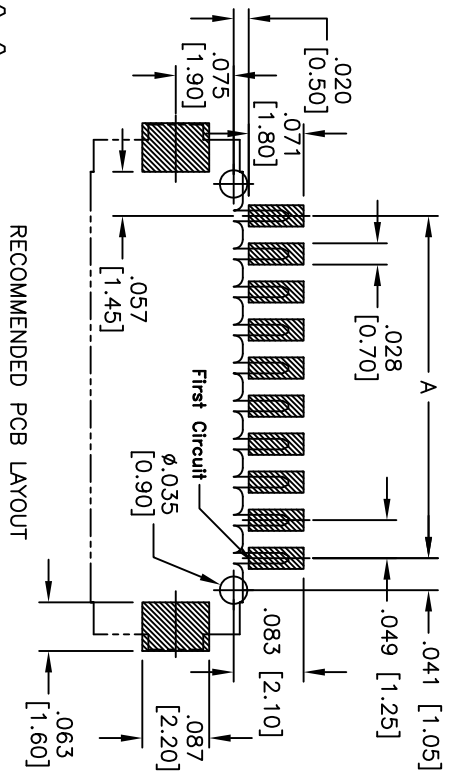


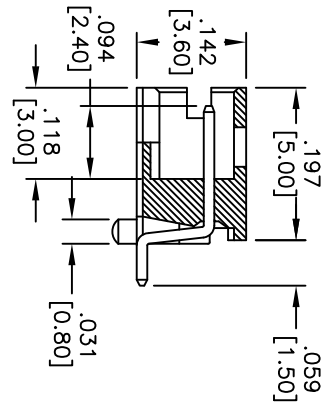
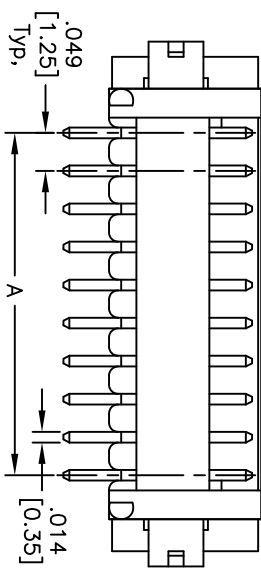
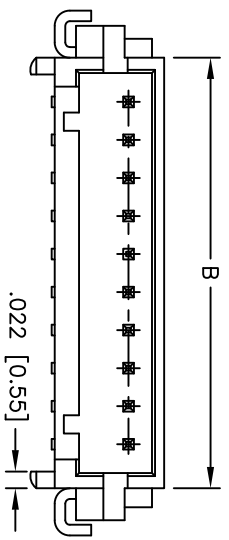


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/11/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

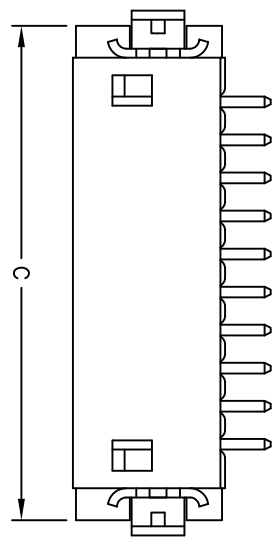

PACKAGED ON TAPE & REEL

**SPECIFICATIONS:**

**Material:**  
 Insulator: Nylon 6T, rated UL 94V-0

**Insulator color:** Natural

**Contacts:** Brass, Gold flash plated

**Electrical:**  
 Operating voltage: 150V AC,DC

**Current rating:** 1A AC,DC

**Contact resistance:** 30 mohms max

**Insulation resistance:** 500 Mohms min

**Withstanding voltage:** 500 VAC for 1 minute

**Temperature Rating:**  
 Operating temperature: -35°C to +85°C

**Environmental:**  
 Lead free, RoHS compliant.

**Recommended soldering temp:** 260°C for 5 sec.



A = .049 [1.25] X No. of Spaces  
 B = .049 [1.25] X No. of Spaces + .114 [2.90]  
 C = .049 [1.25] X No. of Spaces + .197 [5.00]

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE IN INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS	DATE
.X ± .10	ØX ± .10	
.XX ± .020	ØXX ± .015	
.XXX ± .015	ØXXX ± .010	

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .049 [1.25] PITCH WIRE TO BOARD HEADER  
 RIGHT ANGLE, SMT TYPE

DRAWN	CHECKED	APPROVED	SIZE	PART NO.	REV.
DR			X	12SSH-C-XX-TR-SMT-T/R	-
DATE	DATE	DATE	SCALE	NTS	SHEET 1 OF 1
4/11/11					