
7.5-30GHz Frequency Multiplier

GaAs Monolithic Microwave IC

Description


The CHX2095 is a frequency multiplier by 4 monolithic circuit.
It is designed for a wide range of applications, from military to commercial communication systems. The backside of the chip is both RF and DC grounded. This helps to simplify the assembly process.

The circuit is manufactured with a pHEMT process, 0.25µm gate length, via holes through the substrate, air bridges and electron beam gate lithography.

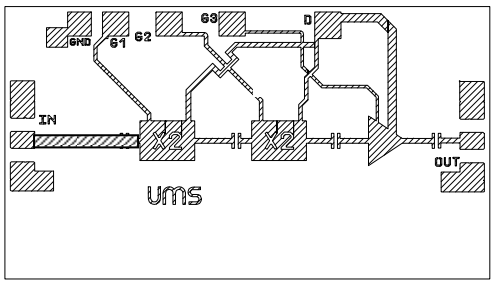

Main Features

- Broadband performance: 6.25-8.25GHz
- 11dBm output power for +12dBm input power
- DC power consumption, 75mA @ 3.5V (RF)
- Chip size: 2.02 x 1.17 x 0.10mm

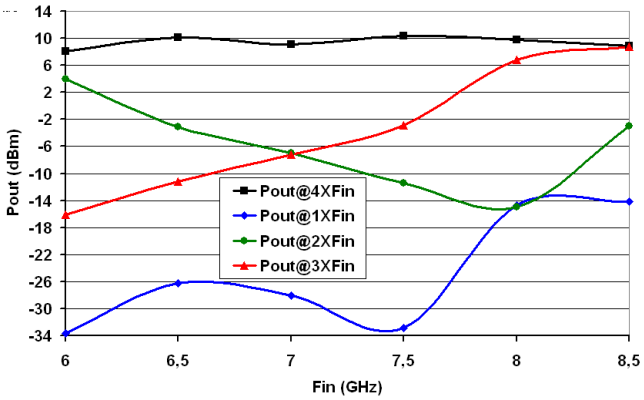

Main Characteristics

Tamb = 25°C

Symbol	Parameter	Min	Typ	Max	Unit
Fin	Input frequency range	6.25		8.25	GHz
Fout	Output frequency range	25		33	GHz
Pin	Input power		12		dBm
Pout 4xFin	Output power for +12dBm input power	8	11	14	dBm

ESD Protection: Electrostatic discharge sensitive device. Observe handling precautions!

United Monolithic Semiconductors S.A.S.
Route Départementale 128 - B.P.46 - 91401 Orsay Cedex France
Tel. : +33 (0)1 69 33 03 08 - Fax : +33 (0)1 69 33 03 09

Electrical Characteristics

These values are representative on wafer measurements
that are made without bonding wires at the RF ports.
Tamb = +25℃, Vd = 3.5V
Vg1 = Vg2 = -0.9V, Vg3 adjusted for Id = 75mA under RF Pin = +12dBm.

Symbol	Parameter	Min	Typ	Max	Unit
Fin	Input frequency range	6.25		8.25	GHz
Fout	Output frequency range	25		33	GHz
Pin	Input power		12		dBm
Pout 4xFin	Output power for +12dBm input power	8	11	14	dBm
Pout 1xFin	Fin level at the output for +12dBm input power (6.25 < Fin < 8.25GHz)		0	2	dBm
Pout 2xFin	2Fin level at the output for +12dBm input power (12.5 < 2Fin < 16.5GHz)		-10	3	dBm
Pout 3xFin	3Fin level at the output for +12dBm input power (18.75 < 3Fin < 24.75GHz)		0	12	dBm
Pout 5xFin	5Fin level at the output for +12dBm input power (31.25 < 5Fin < 41.25GHz)		0		dBm
VSWRin	Input VSWR		2.5:1		
VSWRout	Output VSWR		2.5:1		
Id	Bias current		75		mA

A wire bond of typically 0.1 to 0.15nH will improve the input and output matching.

Absolute Maximum Ratings

Tamb = +25℃

Symbol	Parameter	Values	Unit
Vd	Supply voltage	*4.0*	V
Id	Supply current	*150*	mA
Pin	Input power	*20*	dBm
Ta	Operating temperature range	*-40 to +85*	℃
Tstg	Storage temperature range	*-55 to +125*	℃


(1) Operation of device above anyone of these parameters may cause permanent damage.

Route Départementale 128, B.P.46 - 91401 ORSAY Cedex - FRANCE
Tel.: +33 (0)1 69 33 03 08 - Fax : +33 (0)1 69 33 03 09

united monolithic semiconductors

Typical on Wafer Measurements

Tamb = +25℃ & Bias conditions: Vd = 3.5V, Vg1 = Vg 2 = -0.9V,
Vg3 adjusted for Id = 75mA under RF Pin = +12dBm.

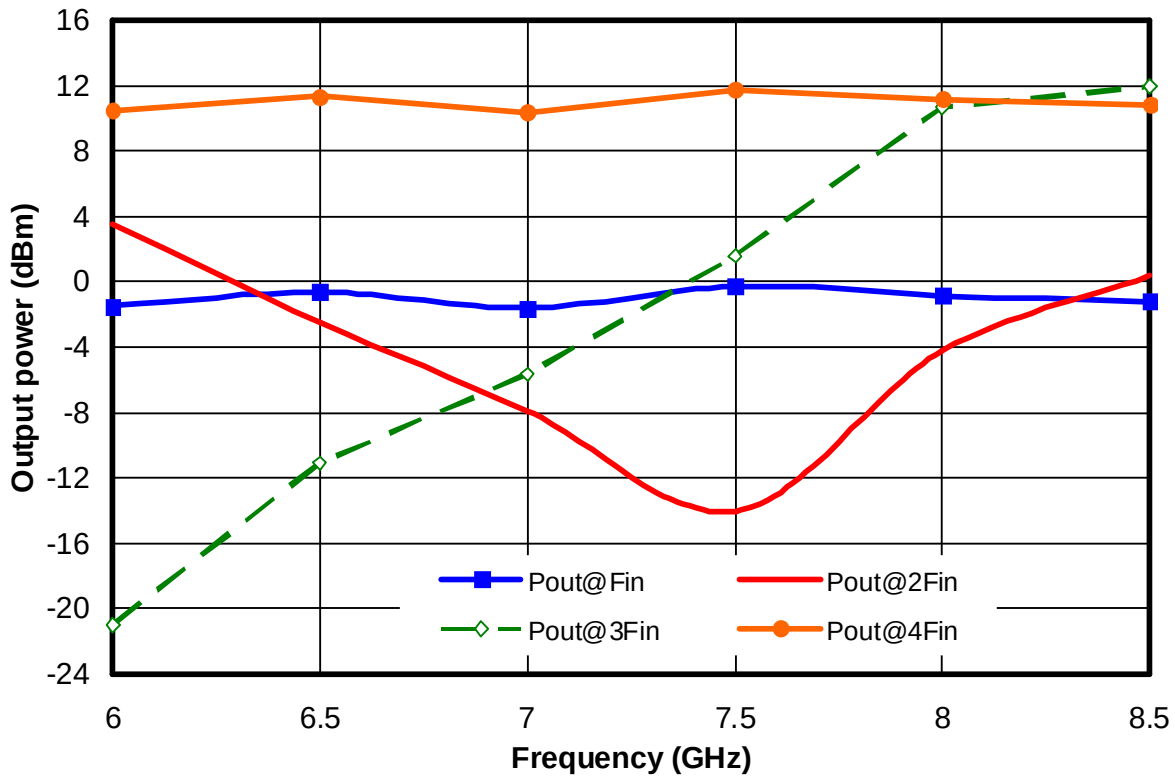


Route Départementale 128, B.P.46 - 91401 ORSAY Cedex - FRANCE
Tel.: +33 (0)1 69 33 03 08 - Fax : +33 (0)1 69 33 03 09

united monolithic semiconductors


Typical Jig Measurements

Tamb = +25℃ & Bias conditions: Vd = 3.5V, Pin = +1 1dBm (jig losses are not corrected and are evaluated to 1.5dB at 30GHz)


Gate voltage Vg1=Vg2=-0.8V Id=70mA

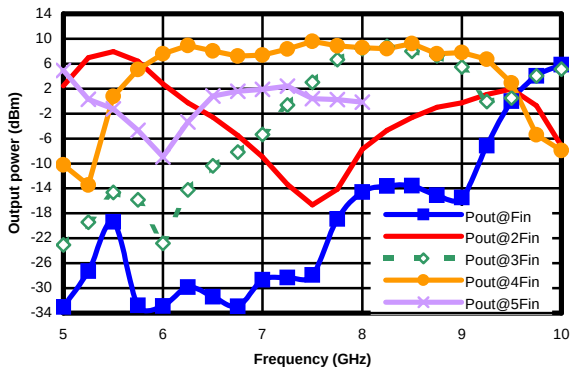


Gate voltage Vg1=Vg2=-0.95V Id=75mA

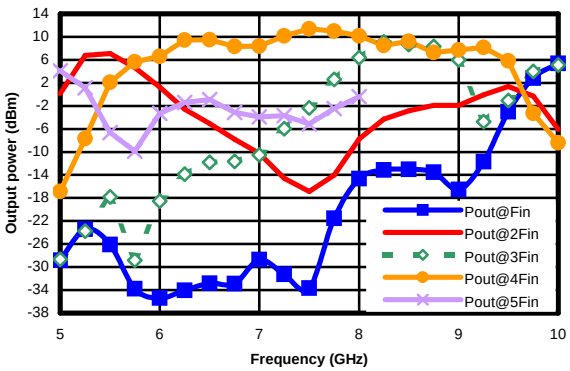

Gate voltage Vg1=Vg2=-1.1V Id=80mA

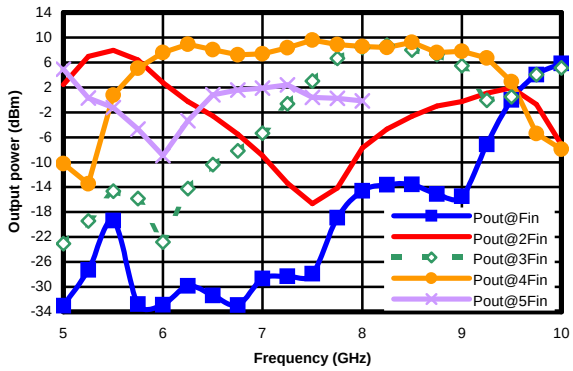


Tamb = +25℃ & Bias conditions: Vd = 3.5V, Id = 75m A under RF nominal Pin = +12dBm Fin = 7.5GHz (jig losses are not corrected and are evaluated to 1.5dB at 30GHz)

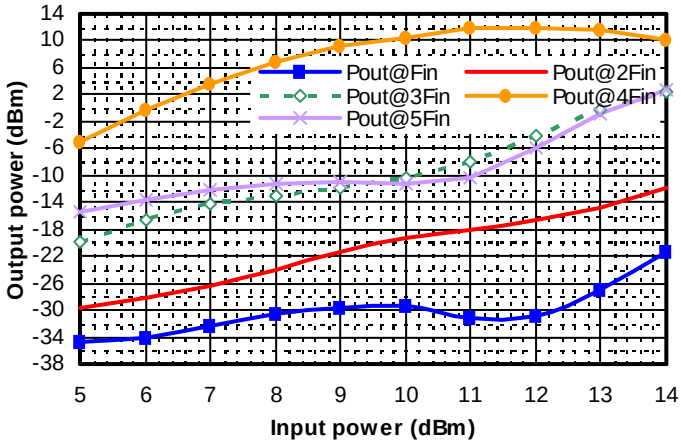


Route Départementale 128, B.P.46 - 91401 ORSAY Cedex - FRANCE
Tel.: +33 (0)1 69 33 03 08 - Fax : +33 (0)1 69 33 03 09

united monolithic semiconductors

Chip Assembly and Mechanical Data

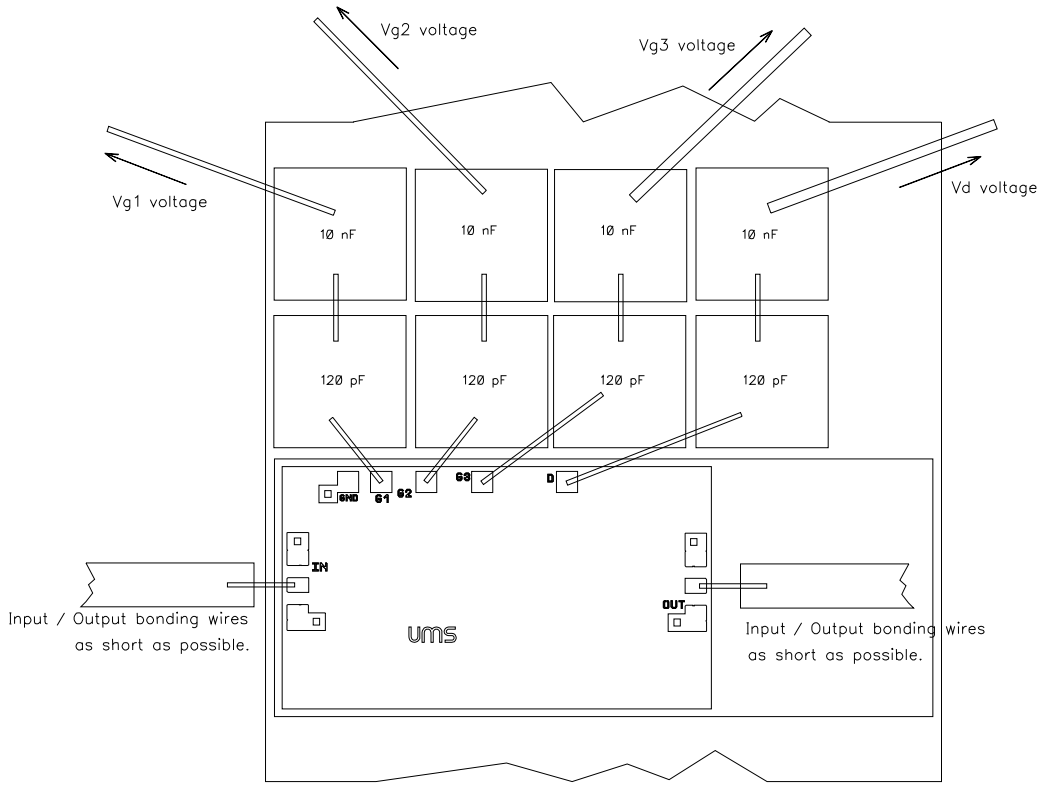

Note: Supply feed should be capacitively bypassed. 25µm diameter gold wire is to be prefered.

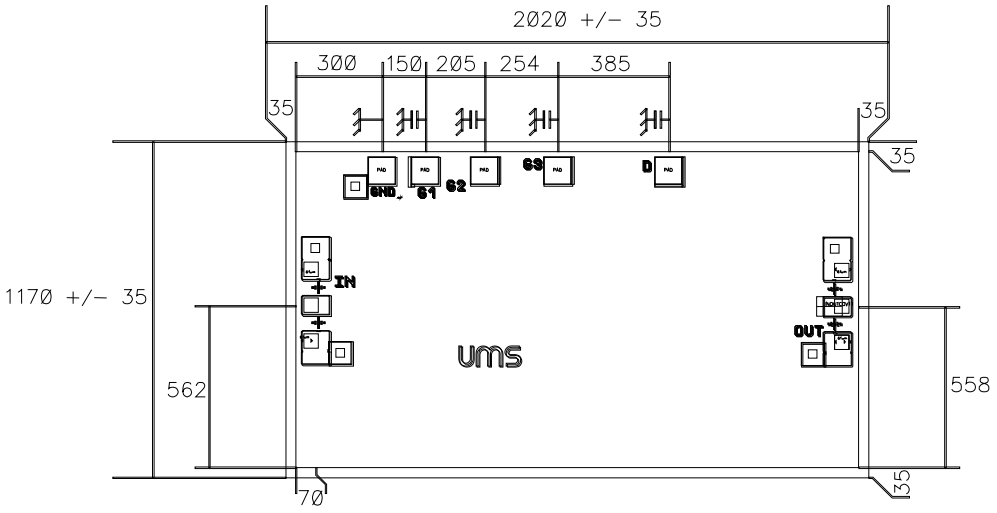

Bonding pad positions.
(Chip thickness: 100µm. All dimensions are in micrometers)

Route Départementale 128, B.P.46 - 91401 ORSAY Cedex - FRANCE
Tel.: +33 (0)1 69 33 03 08 - Fax : +33 (0)1 69 33 03 09

united monolithic semiconductors

Ordering Information

Chip form: CHX2095-99F/00

Information furnished is believed to be accurate and reliable. However **United Monolithic Semiconductors S.A.S.** assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of **United Monolithic Semiconductors S.A.S.**. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. **United Monolithic Semiconductors S.A.S.** products are not authorised for use as critical components in life support devices or systems without express written approval from **United Monolithic Semiconductors S.A.S.**

Route Départementale 128, B.P.46 - 91401 ORSAY Cedex - FRANCE
Tel.: +33 (0)1 69 33 03 08 - Fax : +33 (0)1 69 33 03 09