| MALLORY Mallory Sonalert Products Inc. | Part # PT-1250PQ |
|---|---|
| **Sales Outline Drawing** | Revision C |

**May not be suitable for all medical and aerospace applications.**


**Specifications: Contact Mallory Sonalert to discuss your application.**

| | |
|---|---|
| Resonant Frequency (Hz) | 5000 ± 500 |
| Operating Voltage (Vp-p/max) | 25 |
| Rated Voltage (Vp-p) | 5.0 |
| Current Consumption (mA/max) | 1.5 at Rated Voltage |
| Sound Pressure Level (dB/min) | 80 at 10cm at Rated voltage |
| Capacitance (pF) | 15,000 ±30% at 120Hz |
| Operating Temperature (°C) | -20 ~ +90 |
| Storage Temperature (°C) | -30 ~ +100 |
| Housing | ABS 777D plastic resin (Color: Black) |
| Lead Pins | Tin Plated Brass |
| Weight (Grams) | 0.8 |
| Condition by wave soldering (°C) | 260 ±5 / within 5 sec |
| Condition by hand soldering (°C) | 350 ±20 / within 5 sec |
| Options | For other options contact factory |

**NO CIRCUITRY**

**Dimensions:** (units: mm)

**ROHS Compliant**

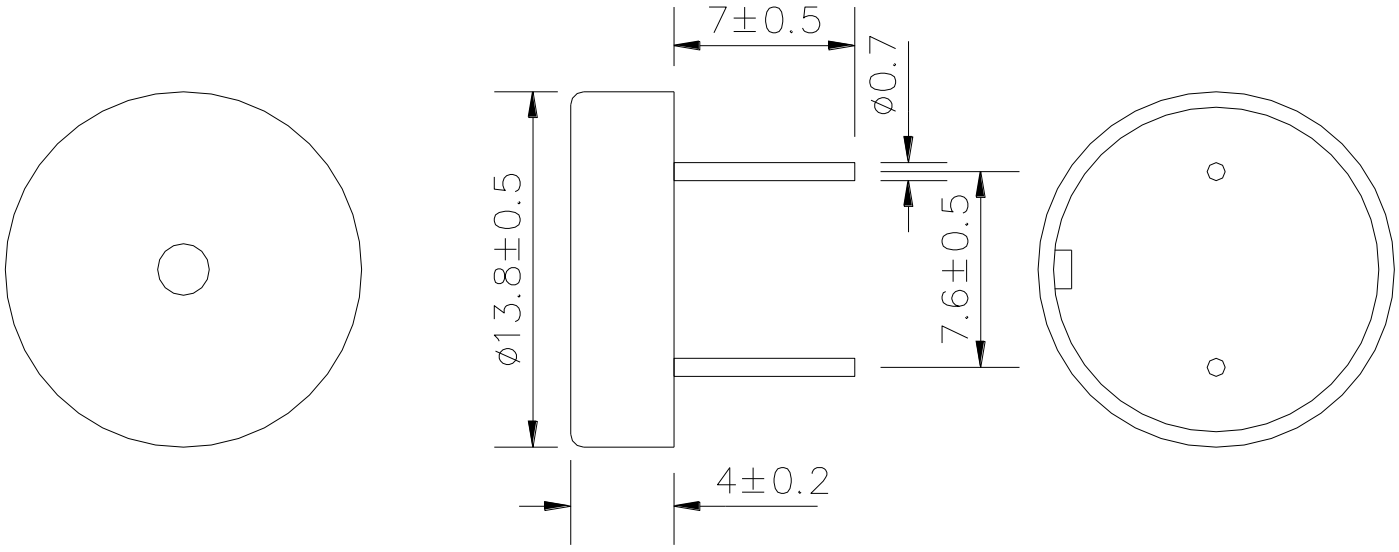


4411 South High School Road, Indianapolis, Indiana 46241 USA ● Phone (317) 612-1000 ● Fax (317) 612-1010 ● http://www.mspindy.com