



1. Mechanical Dimensions:

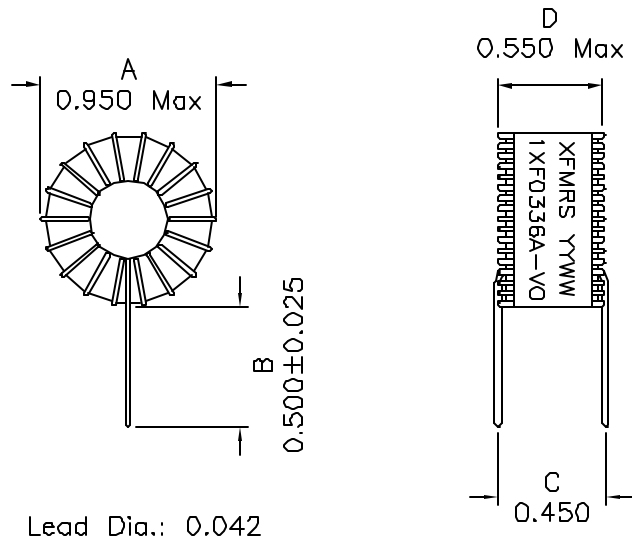

2. Schematic:



3. Electrical Specifications:

Inductance: 33uH±15% @1KHz 0.1V, 0Adc

Inductance: 21.6uH±15% @1KHz 0.1V, 7.4Adc

DCR: 0.020 Ohms Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen Index: > 28%
4. Insulation System: Class F 155°C, UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -55°C to +105°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/1

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc. www.XFMRS.com	Title: INDUCTOR		
	UNLESS OTHERWISE SPECIFIED	P/N: 1XF0336A-VO	REV. A
TOLERANCES: .xxx ±0.010	DWN.	康玉坤	Aug-21-07
Dimensions in Inch	CHK.	李清儿	Aug-21-07
SHEET 1 OF 1	APP.	BW	Aug-21-07