

SLD433S4

Description

The SLD433S4 is a high power laser diode with an array structure, which achieves 60W high power.
The package is high efficiency water cooling package.
Module customizing is available.
(Applications: Solid state laser excitation)

Features

- ◆ High power
Recommended optical power output: $P_o = 60W$
- ◆ Array structure
- ◆ Open package
- ◆ High efficiency water cooling package

Package

Structure

AlGaAs quantum well structure laser diode

Sony reserves the right to change products and specifications without prior notice. This information does not convey any license by any implication or otherwise under any patents or other right. Application circuits shown, if any, are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits.



Absolute Maximum Ratings

(Tw = 25°C, Tw: cooling water temperature)

♦ Optical power output	P _{omax}	66	W
♦ Reverse voltage	V _R LD	2	V
♦ Operating temperature (Tw)	T _{opr}	+10 to +30	°C
♦ Storage temperature	T _{stg}	−10 to +60	°C
♦ Storage humidity	No dew condensation		



Operating Lifetime

MTTF 10,000H (effective value) at Po = 60W, Tw = 25°C



Electrical and Optical Characteristics

($T_w = 25^\circ\text{C}$, T_w : Cooling water temperature))

Item		Symbol	Conditions	Min.	Typ.	Max.	Unit
Threshold current		I _{th}		—	17	22	A
Operating current		I _{op}	P _o = 60W	—	75	85	A
Operating voltage		V _{op}	P _o = 60W	—	—	2.5	V
Wavelength		λ _p	P _o = 60W	805	—	811	nm
Wavelength spectrum width		λ _w	P _o = 60W (FWHM)	—	—	3	nm
Radiation angle	Perpendicular	θ⊥	P _o = 60W (FWHM)	18	24	28	degree
	Parallel	θ//		—	8	12	degree
Positional accuracy	Position	ΔX		—	—	±300	μm
		ΔY		—	—	±100	μm
		ΔZ		—	—	±100	μm
	Angle	Δφ⊥		—	—	5	degree
		Δθ//		—	—	1	degree
Differential efficiency		η _D	P _o = 60W	—	1.0	1.5	W/A

Cooling water flow rate: $\geq 0.4\text{L/min}$

Cooling water type:


Deionized water: conductivity $< 3\mu\text{S/cm}$

Particle filter: $< 30\mu\text{m}$

Notes On Handling

Care should be taken for the following points when using this product.




1. This product corresponds to a Class 4 product under IEC60825-1 and JIS standard C6802 "Laser Product Emission Safety Standards".

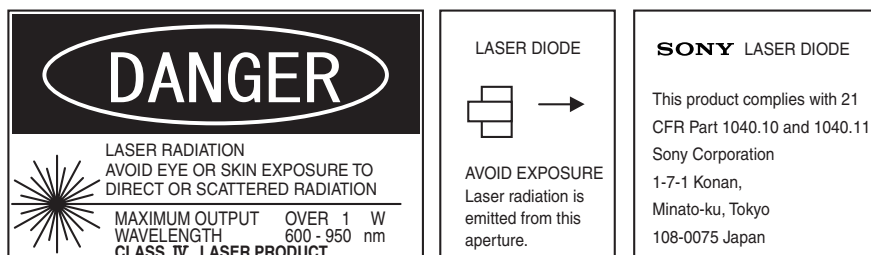

2. Eye protection against laser beams
Take care not to allow laser beams to enter your eyes under any circumstances.
For observing laser beams, ALWAYS use safety goggles that block laser beams. Usage of IR scopes, IR cameras and fluorescent plates is also recommended for monitoring laser beams safely.
3. Gallium Arsenide
This product uses gallium arsenide (GaAs). This is not a problem for normal use, but GaAs vapors may be potentially hazardous to the human body. Therefore, never crush, heat to the maximum storage temperature or higher, or place the product in your mouth.
In addition, the following disposal methods are recommended when disposing of this product.
 - (1) Engaging the services of a contractor certified in the collection, transport and intermediate treatment of items containing arsenic.
 - (2) Managing the product through to final disposal as specially managed industrial waste which is handled separately from general industrial waste and household waste.
4. Prevention of surge current and electrostatic discharge
Laser diodes are most sensitive to electrostatic discharge among semiconductors. When a large current is passed through the laser diode for even an extremely short time, the strong light emitted from the laser diode promotes deterioration and then destruction of the laser diode. Therefore, note that surge current should not flow to the laser diode driving circuit from switches and others. Also, if the laser diode is handled carelessly, it may be destroyed instantly because electrostatic discharge is easily applied by a human body. Therefore, be extremely careful about overcurrent and electrostatic discharge.
5. Use for special applications
This product is not designed or manufactured for use in equipment used under circumstances where failure may pose a risk to life and limb, or result in significant material damage, etc.
Consult your Sony sales representative when investigating use for medical, vehicle, nuclear power control or other special applications. Also, use the power supply that was designed not to exceed the optical power output specified at the absolute maximum ratings.
6. Environment-related Substances to be Controlled
No substances classified at Level 1 (immediate ban) of Sony Technical Standard, SS-00259, "Management regulations for the Environment-related Substances to be Controlled". The excerpt from SS-00259 is introduced on following URL.
<http://www.sony.net/SonyInfo/procurementinfo/ss00259/>

(Unit: mm)

Technical drawing of a rectangular plate with two threaded holes. The left hole is labeled $M3$ LD(-) and the right hole is labeled $M3$ LD(+). Dimension lines below the plate indicate a distance of 22.5 from the left edge to the center of the left hole, and a distance of 12.5 between the centers of the two holes.

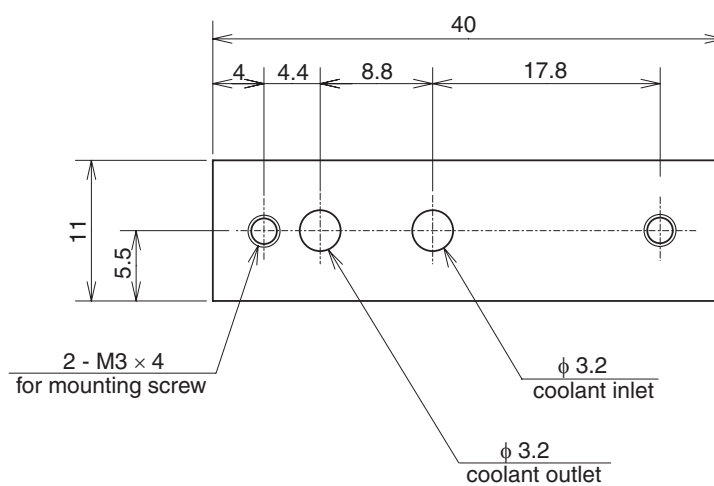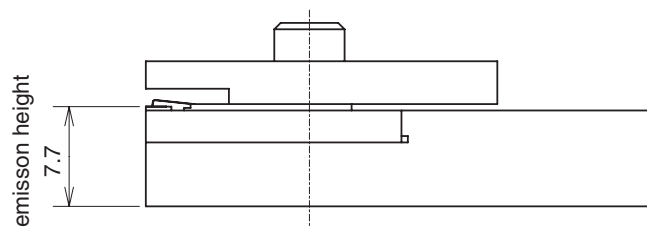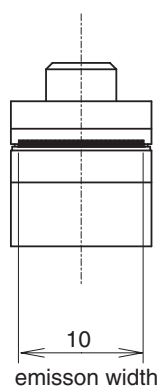

PACKAGE MASS	34.3g
--------------	-------