

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



© COPYRIGHT - By TE CONNECTIVITY

ALL RIGHTS RESERVED.


LOC
HBDIST
—

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
B1		1.CHANGE TE LOGO 2.ADD LINE IDENTIFICATION 3.PN OBSOLETE 4.TERMINALS TOLERANCE CLARIFICATION	ECO-11-018616	04-MAY-12	P.L B.H.Y

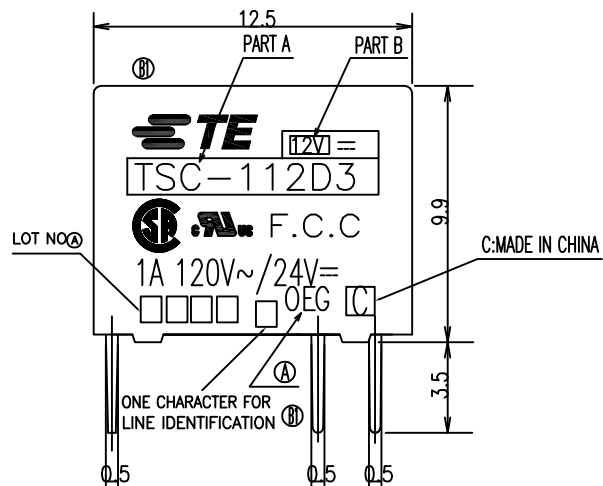

DRILLING DIAGRAM (BOTTOM VIEW)

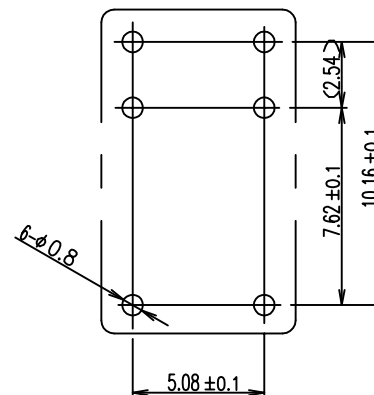

CONNECTION DIAGRAM (BOTTOM VIEW)



GENERAL TOLERANCE

DIAGRAM DIMENSION	TOLERANCE
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -
MATERIAL	FINISH
-	-

DWN N.FUNAYAMA	TE Connectivity		
CHK H.SASAKI			
APVD A.NAGAI	NAME		
PRODUCT SPEC	TSC STANDARD TYPE		
APPLICATION SPEC	—		
WEIGHT	SIZE A3	CAGE CODE 00779	DRAWING NO C=1461184
CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 2
		REV B1	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- . - .

© COPYRIGHT - By TE CONNECTIVITY

ALL RIGHTS RESERVED.

LOC
HBDIST
—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—	SEE SHEET 1	—	—	—

(A) NOTES:

1.LOT NO. SYSTEM AS FOLLOWING:

WEEK
YEAR

- (B1) 2.TERMINAL DIMENSIONS BEFORE SOLDER DIP
(B1) 3.FOR THE TIN-PLATING OF THE PINS:
+0.1mm FOR WIDTH, THICKNESS AND DIAMETER
+0.5mm FOR LENGTH

(B1)

n	2-1419130-6	TSC-124D3	24V	108-79496	OBSOLETE
m	1461184-6	TSC-118D3	18V	108-79495	OBSOLETE
l	2-1419130-0	TSC-112D3	12V	108-79494	OBSOLETE
k	1461184-5	TSC-109D3	9V	108-79493	OBSOLETE
j	1461184-4	TSC-106D3	6V	108-79492	OBSOLETE
i	1419130-9	TSC-105D3	5V	108-79491	OBSOLETE
h	1461184-3	TSC-103D3	3V	108-79490	OBSOLETE
g	2-1419130-7	TSC-124L3	24V	108-79489	ACTIVE
f	1461184-2	TSC-118L3	18V	108-79488	OBSOLETE
e	2-1419130-3	TSC-112L3	12V	108-79487	OBSOLETE
d	1-1419130-7	TSC-109L3	9V	108-79486	OBSOLETE
c	1461184-1	TSC-106L3	6V	108-79485	OBSOLETE
b	1-1419130-1	TSC-105L3	5V	108-79484	OBSOLETE
a	2-1440003-0	TSC-103L3	3V	108-79483	OBSOLETE
No.	TE PART NO	PART A	PART B	PRODUCT SPRC NO	STATUS

RELAY TYPE

		EPOXY RESIN	SEAL (CASE&BASE) MIX	14
	SOLDER DIP	Cu ALLOY	COIL TERMINAL	13
94V-0		PBT	BOBBIN	12
		UEW	MAGNETIC WIRE	11
94V-0		PBT	CASE	10
	Ni P	STEEL	YOKE	9
	Ni P	STEEL	ARMATURE	8
	Ni P	STEEL	CORE	7
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	6
	SOLDER DIP	Cu ALLOY	B TERMINAL	5
	SOLDER DIP	Cu ALLOY	M TERMINAL	4
	GS CLAD	Ag ALLOY	MOVABLE CONTACT	3
	GS CLAD	Ag ALLOY	B CONTACT	2
	GS CLAD	Ag ALLOY	M CONTACT	1
UL-94	FINISH	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±
MATERIAL	FINISH

DWN
N.FUNAYAMACHK
H.SASAKIAPVD
A.NAGAI

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

—

—

—

—

—

NAME

TSC STANDARD TYPE

SIZE

A3

CAGE CODE

00779

DRAWING NO

C=1461184

RESTRICTED TO

—

CUSTOMER DRAWING

SCALE 5:1

SHEET

2 of 2

REV B1