

REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE
A	Released	J05-0079	H.T	05/2/18

CAT. NO.

SERIES NAME

NO. OF CONTACTS

R : RIGHT ANGLE TYPE
S : STRAIGHT TYPE

VARIATION

LEAD FREE


SLW (n) R - 1C7 LF

1. SEE PART DRAWINGS FOR
DIMENSIONS A,B.

SHEET INDEX		ISSUE		A																					
		SH NO.		1																					
TOLERANCES UNLESS OTHERWISE SPECIFIED						DR		A. KOBAYASHI		DATE		05/2/18		CUSTOMER COPY		TITLE CAT NO. TABLE FOR 1mm SPACING CONNECTOR (Cat. No. SLW__R/S-1C7LF)									
LINEAR						ENGR				2/18/05				THIRD ANGLE PROJ											
						CHK				2/18/05															
						APPD				2/18/05		UNIT		MM INCH											
ANGLES																PRODUCT FAMILY 58JF						CODE JP			
DO NOT SCALE PRINT						THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN FCI PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM FCI JAPAN K.K.										SCALE		SIZE		DWG. NO.		REV		SHEET	
DF-140A REV A																-		A		JSA 96300		A		OF	

REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE
A	Released	J05-0079	H.T	'05/2/18
B	Added heat resistance	J05-0734	H.T	0/28/05

n : NO. OF CONTACTS

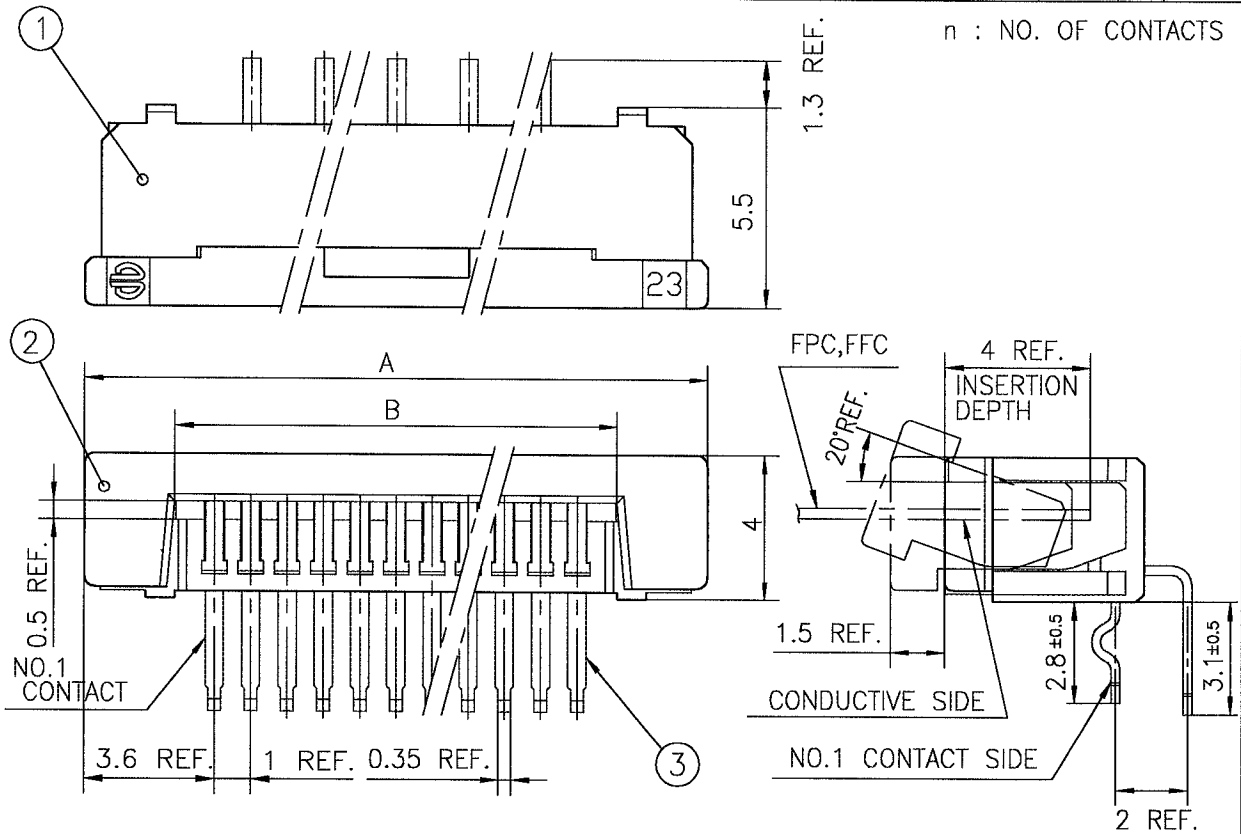


PT.NO.	PARTS NAME	MATERIAL	Q'TY	NOTE
1	HOUSING	NYLON RESIN GLASS REINFORCED (UL94V-0)	1	COLOR : BLACK
2	SLIDER		1	
3	CONTACT	PHOSPHOR BRONZE	n	PLATING : MATTE PURE TIN (LEAD FREE)

RECOMMENDED PC BOARD

THICKNESS : 0.8~1.6

HOLE PATTERN (COMPONENT SIDE)

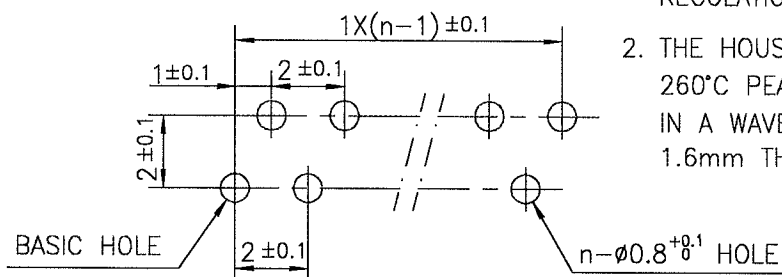

1. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

2. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm THICK CIRCUIT BOARD.

SHEET INDEX	ISSUE	B															TITLE	1mm SPACING CONNECTOR (Cat. No. SLW__R-1C7LF)			
	SH NO.	1																			
TOLERANCES UNLESS OTHERWISE SPECIFIED		DR		DATE		CUSTOMER COPY															
±0.3		ENGR		10/21/05		THIRD ANGLE PROJ															
LINEAR		CHK		10/21/05		UNIT															
ANGLES		APPD		11/1/05		MM INCH															
DO NOT SCALE PRINT		THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN FCI PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM FCI JAPAN K.K.										SCALE		SIZE		DWG. NO.		REV		SHEET	
DF-140A REV A												-		A		JSA 96302		B		DF	

SC-SLW03 JSA96300

PDM: Rev:B

STATUS: Released

Printed: Nov 25, 2005

TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.3					REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE					
A	Released	J05-0079	H.T	'05/2/18					
B	Added note	J05-0501	H.T	'05/8/4					

n : NO. OF CONTACTS

Top View Dimensions: 0.5 REF., B, 4 REF., A, 5.5, 3 ± 0.5 , 3.6 REF., 1 REF., 0.35 REF., NO.1 CONTACT, 23, 2.

Side View Dimensions: 20° REF., 1.5 REF., 4 REF., INSERTION DEPTH, CONDUCTIVE SIDE, 2 REF., 0.87 REF., NO.1 CONTACT SIDE.

PT.NO.	PARTS NAME	MATERIAL	Q'TY	NOTE
1	HOUSING	NYLON RESIN GLASS REINFORCED (UL 94V-0)	1	COLOR : BLACK
2	SLIDER		1	
3	CONTACT	PHOSPHOR BRONZE	n	PLATING : MATTE PURE TIN (LEAD FREE)

RECOMMENDED PC BOARD
 THICKNESS : 0.8~1.6
 HOLE PATTERN (COMPONENT SIDE)

BASIC HOLE, $1 \times (n-1) \pm 0.1$, 1 ± 0.1 , 2 ± 0.1 , 2 ± 0.1 , $n - \phi 0.8 \pm 0.1$ HOLE.

THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MINIMUM THICK CIRCUIT BOARD.

SHEET INDEX	ISSUE	B										
SH NO.	1											
TOLERANCES UNLESS OTHERWISE SPECIFIED		DR	<i>[Signature]</i>		DATE	8/4/05		CUSTOMER COPY				
LINEAR		ENGR	<i>[Signature]</i>		8/4/05			THIRD ANGLE PROJ				
		CHK	<i>[Signature]</i>		8/4/05							
		APPD	<i>[Signature]</i>		8/4/05							
ANGLES				UNIT	MM		INCH					
DO NOT SCALE PRINT		THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN FCI PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM FCI JAPAN K.K.										
DF-140A REV A		SC-SLW03 JSA96300										


FCI

TITLE				
1mm SPACING CONNECTOR (Cat. No. SLW__S-1C7LF)				
PRODUCT FAMILY				CODE JP
58JF				
SCALE	SIZE	DWG. NO.	REV	SHEET OF
-	A	JSA 96301	B	01

REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE
AA	Changed form	J05-0079	H.T	2/18/05

RECOMMENDED CABLE (FPC)

n : NO. OF CONDUCTOR

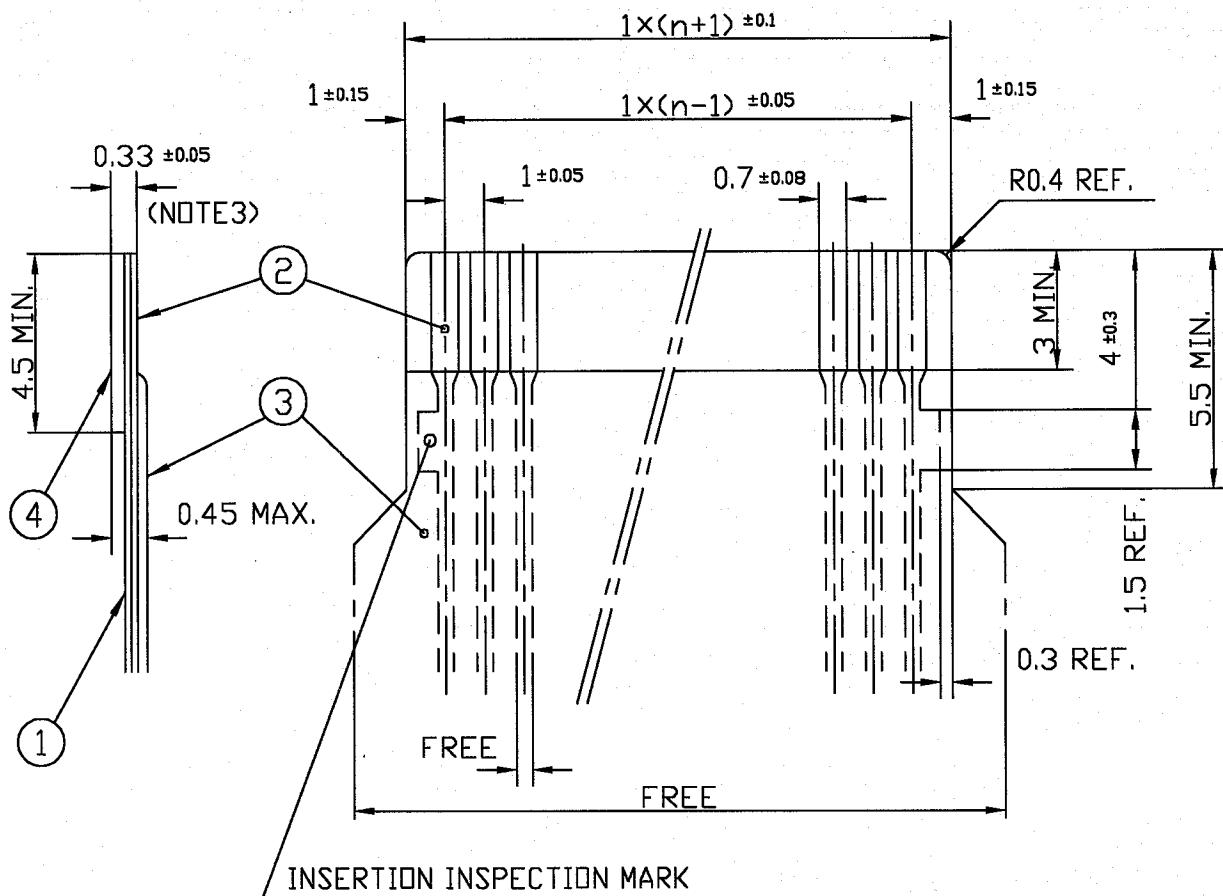

PT. NO.	PARTS NAME	MATERIAL	THICKNESS (μm)
1	BASE FILM	POLYIMIDE OR POLYESTER OR EQUAL	25
2	CONDUCTOR	COPPER FOIL (PLATING : SOLDER 1μm MIN.)	35
3	OVERLAY	POLYIMIDE OR POLYESTER OR EQUAL	—
4	SUPPORTING TAPE	POLYESTER OR POLYIMIDE OR EQUAL	188


- NOTES
1. NO BURR AT EACH PORTION.
 2. NO PEELING IN COMMON USE.
 3. TOTAL THICKNESS LIMIT OF EACH MATERIAL (INCLUDING ADHESIVE AGENT) IS SPECIFIED.

SHEET INDEX	ISSUE	AA												
	SH NO.	1												
TOLERANCES UNLESS OTHERWISE SPECIFIED			DR	A. KOBAYASHI		DATE	05/2/18		CUSTOMER COPY	 RECOMMENDED CABLE (Cat. No. SLW__R/S-__)				
LINEAR			ENGR	<i>[Signature]</i>		2/18/05		THIRD ANGLE PROJ						
			CHK	<i>[Signature]</i>		2/18/05		UNIT						
			APPD	<i>[Signature]</i>		2/18/05		MM INCH						
ANGLES									PRODUCT FAMILY				58JF	CODE JP
DO NOT SCALE PRINT			THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN FCI PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM FCI JAPAN K.K.							SCALE	SIZE	DWG. NO.	REV	SHEET
DF-140A REV A										-	A	JSA 91648	AA	OF

REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE
AA	Changed form.	J05-0079	H.T	2/18/05







RECOMMENDED CABLE (FFC)

n : NO. OF CONDUCTOR

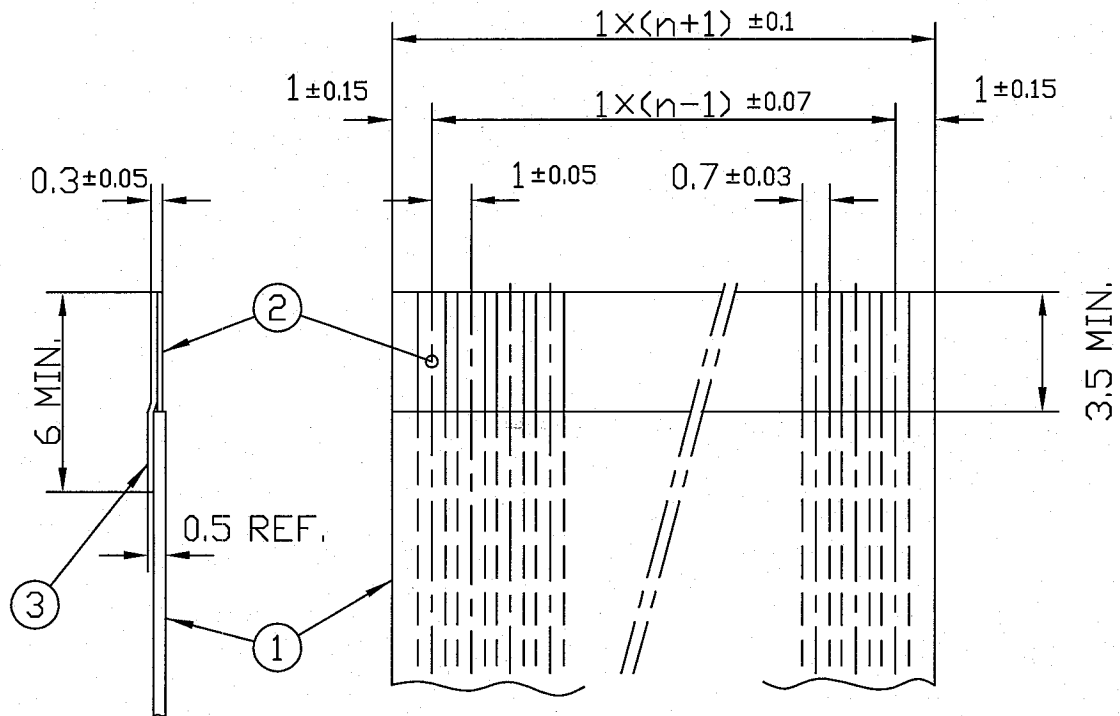

PT. NO.	PARTS NAME	MATERIAL	NOTE
1	INSULATOR	FLAME RESISTING POLYESTER OR EQUAL	
2	CONDUCTOR	COPPER FOIL	PLATING : TIN OR SOLDER 1μm MIN.
3	SUPPORTING TAPE	FLAME RESISTING POLYESTER OR EQUAL	

- NOTES
1. NO BURR AT EACH PORTION.
 2. NO PEELING IN COMMON USE.


SHEET INDEX	ISSUE	AA																															
	SH NO.	1																															
TOLERANCES UNLESS OTHERWISE SPECIFIED		DR		A. KOBAYASHI		DATE		2/18/05		CUSTOMER COPY		TITLE RECOMMENDED CABLE (Cat. No. SLW__R/S-____)																					
±0.3		ENGR				2/18/05				THIRD ANGLE PROJ										UNIT		MM		INCH									
LINEAR		CHK				2/18/05				UNIT		MM		INCH		PRODUCT FAMILY				58JF		CODE JP											
ANGLES		APPD				2/18/05				UNIT		MM		INCH		SCALE				A		DWG. NO.		JSA 91649		REV		AA		SHEET		OF	

DO NOT SCALE PRINT

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN FCI PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM FCI JAPAN K.K.

DF-140A REV A


REVISIONS				
REV	DESCRIPTION	ECN	BY	DATE
A	Released	J05-0079	H.T	05/2/15

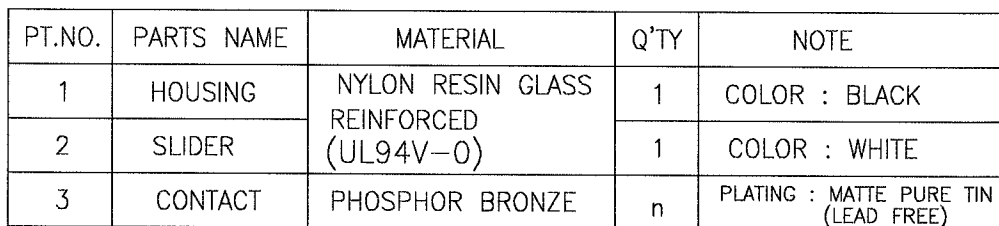n : NO. OF CONTACTS

REGULATING


2. THE HOUSING IS HEATED TO 260°C PERMANENTLY IN A WAVELENGTH OF 1.6mm THICKNESS.

SC-SLW04 JSA96303

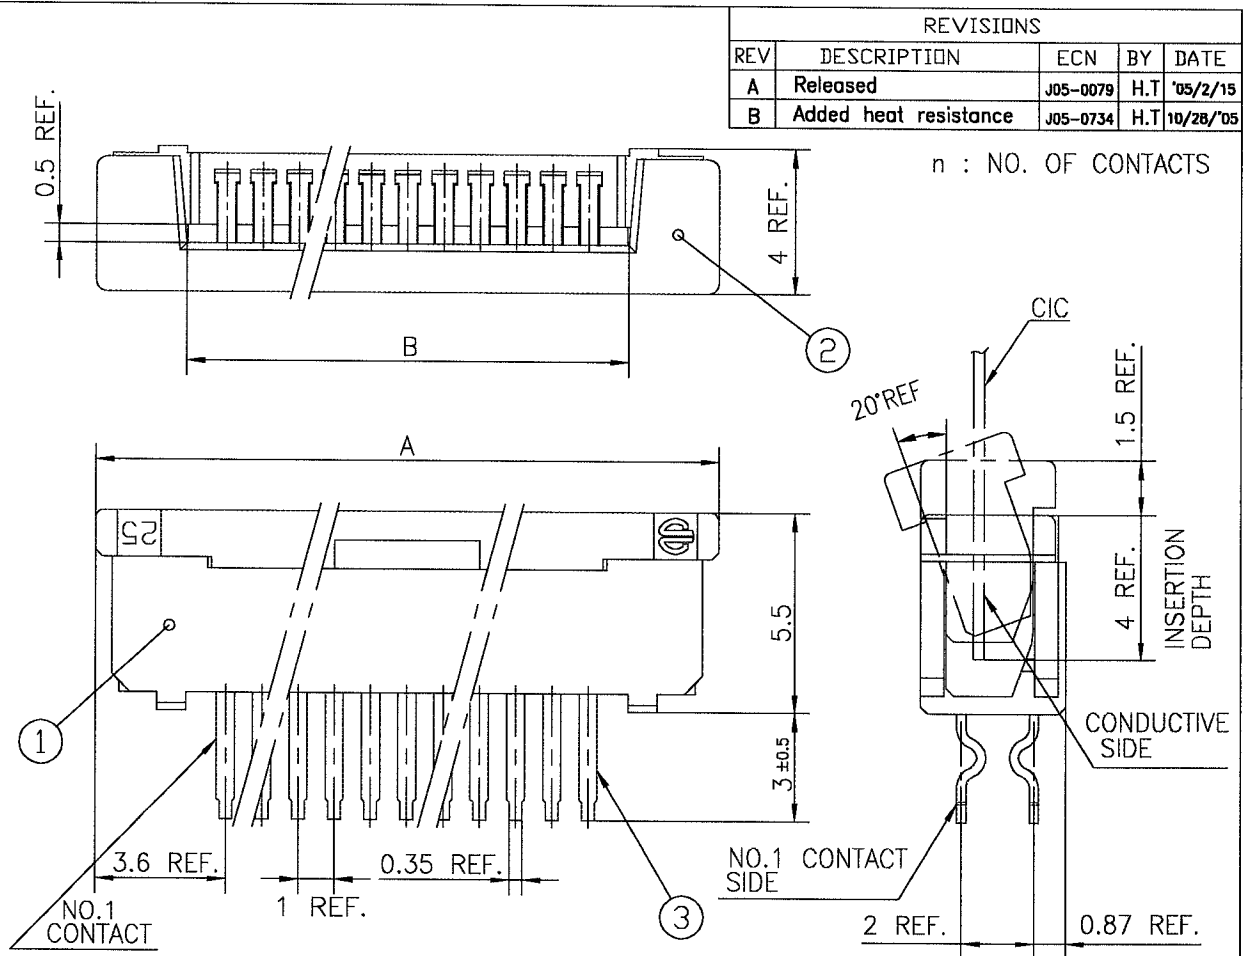

PT.NO.	PARTS NAME	MATERIAL	Q'TY	NOTE
1	HOUSING	NYLON RESIN GLASS REINFORCED (UL94V-0)	1	COLOR : BLACK
2	SLIDER		1	COLOR : WHITE
3	CONTACT	PHOSPHOR BRONZE	n	PLATING : MATTE PURE TIN (LEAD FREE)

RECOMMENDED PC BOARD
 THICKNESS : 0.8~1.6
 HOLE PATTERN (COMPONENT SIDE)

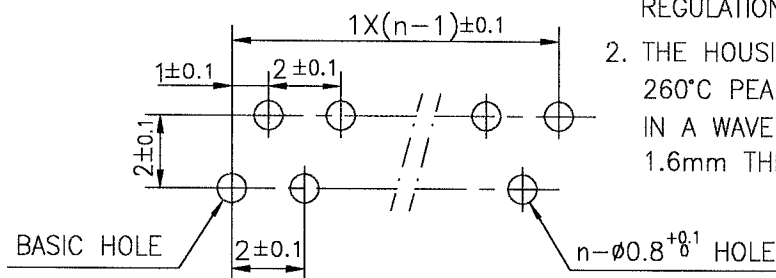

1. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
2. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm THICK CIRCUIT BOARD.


SHEET INDEX	ISSUE	B											A FCI	
	SH NO.	1												
TOLERANCES UNLESS OTHERWISE SPECIFIED			DR <i>[Signature]</i>		DATE 1-128/05		CUSTOMER COPY		TITLE 1mm SPACING CONNECTOR (Cat. No. SLW__S-5C7LF)					
LINEAR ± 0.3			ENGR <i>[Signature]</i>		10/31/05		THIRD ANGLE PROJ							
ANGLES			CHK <i>[Signature]</i>		10/31/05		UNIT MM INCH		PRODUCT FAMILY 58JF					CODE JP
DO NOT SCALE PRINT			THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN FCI PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM FCI JAPAN K.K.					SCALE		SIZE A	DWG. NO. JSA 96304		REV B	SHEET OF

SC-SLW04 JSA96303

RECOMMENDED CABLE (CIC)

REVISIONS

REV	DESCRIPTION	ECN	BY	DATE
AA	Changed form.	J05-0079	H.T	2/18/05

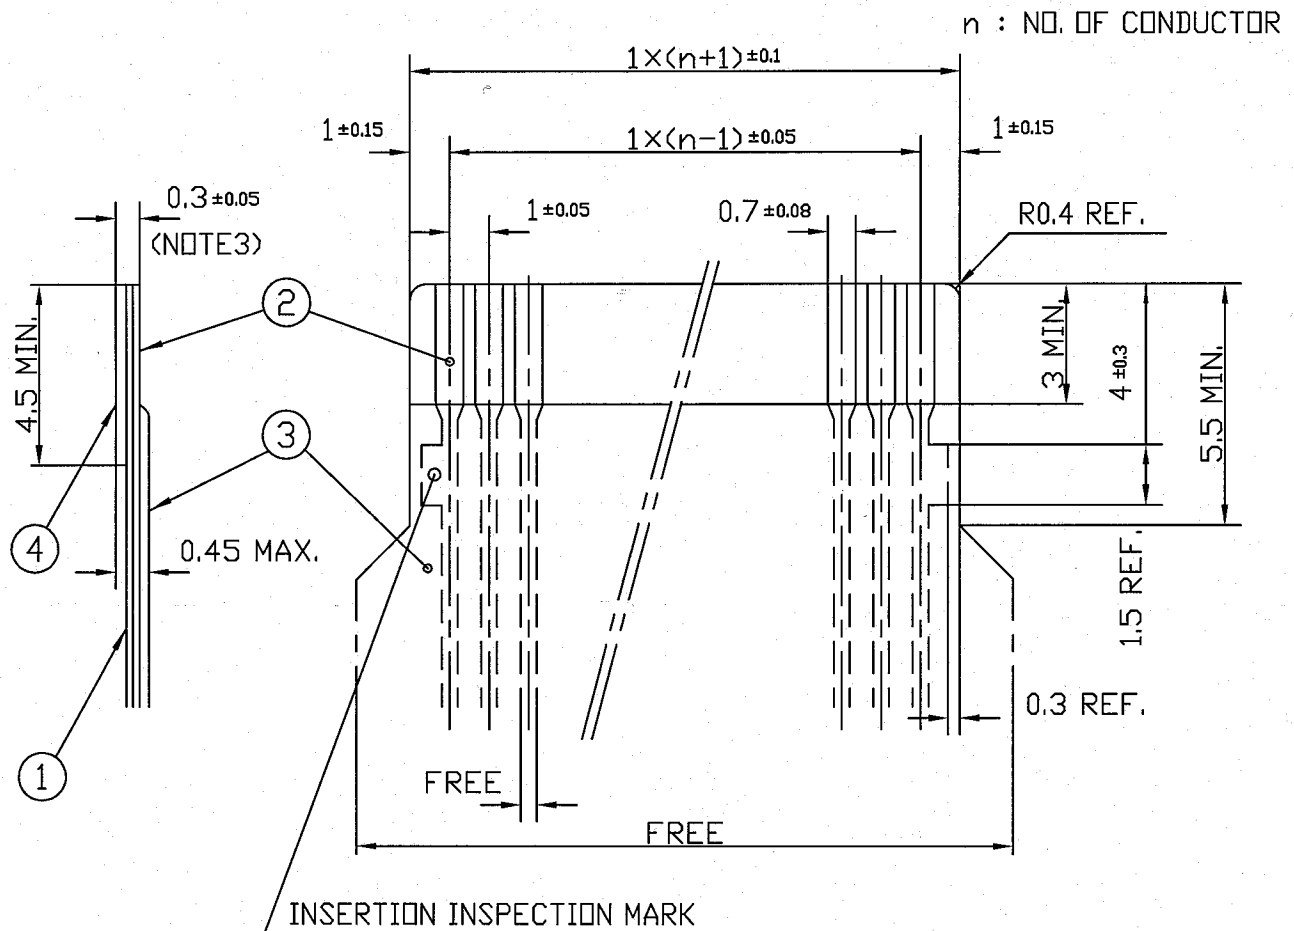

PT. NO.	PARTS NAME	MATERIAL	THICKNESS (μm)	
1	BASE FILM	POLYESTER OR EQUAL	75	25
2	CONDUCTOR	CARBON PASTE OVER SILVER PASTE	10 MIN.	
3	OVERLAY	POLYIMIDE OR POLYESTER OR EQUAL	—	
4	SUPPORTING TAPE	POLYESTER OR POLYIMIDE OR EQUAL	188	250

NOTES

- NO BURR AT EACH PORTION.
- NO PEELING IN COMMON USE.
- TOTAL THICKNESS LIMIT OF EACH MATERIAL (INCLUDING ADHESIVE AGENT) IS SPECIFIED.

SHEET INDEX	ISSUE	A																									
	SH NO.	1																									
TOLERANCES UNLESS OTHERWISE SPECIFIED			DR	A. KOBAYASHI			DATE	2/18/05			CUSTOMER COPY																
LINEAR	±0.3		ENGR	<i>[Signature]</i>			DATE	2/18/05			THIRD ANGLE PROJ.																
			CHK	<i>[Signature]</i>			DATE	2/18/05			UNIT $\frac{MM}{INCH}$																
ANGLES			APPD	<i>[Signature]</i>			DATE	2/18/05			PRODUCT FAMILY 58JF																
DO NOT SCALE PRINT THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN FCI PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM FCI JAPAN K.K.													TITLE RECOMMENDED CABLE (Cat. No. SLW__R/S-5__)														
DF-140A REV A													SCALE - A -			SIZE JSA 92759			DWG. NO. JSA 92759			REV AA			SHEET OF		
PDM: Rev-AA													STATUS Released			Printed: Oct 12, 2005											