
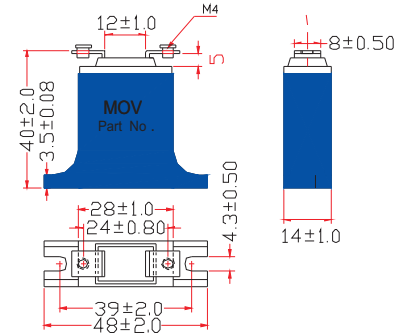



Part Number	Maximum Allowable Voltage		Varistor Voltage		Maximum Clamping Voltage At 150A (V)	Withstanding Surge Current 8/20 S (A)	Rated Wattage (W)	Energy 10/1000 s (J)	UL 
	ACrms (V)	DC (V)	DC (V)	Tolerance Range					
MOV-201KD25H	130	175	200	185-225	330	20,000	1.0	155	✓
MOV-221KD25H	140	180	220	198-242	360	20,000	1.0	170	✓
MOV-241KD25H	150	200	240	216-264	395	20,000	1.0	190	✓
MOV-271KD25H	175	225	270	243-297	455	20,000	1.0	210	✓
MOV-301KD25H	190	250	300	270-330	505	20,000	1.0	220	✓
MOV-331KD25H	210	275	330	297-363	550	20,000	1.0	230	✓
MOV-361KD25H	230	300	360	324-396	595	20,000	1.0	245	✓
MOV-391KD25H	250	330	390	351-429	650	20,000	1.0	300	✓
MOV-431KD25H	275	370	430	387-473	710	20,000	1.0	335	✓
MOV-471KD25H	300	385	470	423-517	775	20,000	1.0	385	✓
MOV-511KD25H	320	420	510	459-561	845	20,000	1.0	420	✓
MOV-561KD25H	350	460	560	504-616	920	20,000	1.0	420	✓
MOV-621KD25H	385	505	620	558-682	1025	20,000	1.0	425	✓
MOV-681KD25H	420	560	680	612-748	1120	20,000	1.0	430	✓
MOV-751KD25H	480	640	750	675-825	1240	20,000	1.0	460	✓
MOV-781KD25H	485	640	780	702-858	1290	20,000	1.0	485	✓
MOV-821KD25H	510	675	820	738-902	1355	20,000	1.0	505	✓
MOV-911KD25H	575	745	910	819-1001	1500	20,000	1.0	560	✓
MOV-102KD25H	660	850	1000	945-1155	1650	20,000	1.0	620	✓
MOV-112KD25H	680	895	1100	990-1210	1815	20,000	1.0	685	✓
MOV-122KD25H	750	970	1200	1080-1320	1925	20,000	1.0	785	✓
MOV-152KD25H	900	1200	1500	1350-1650	2475	20,000	1.0	950	✓
MOV-182KD25H	1000	1465	1800	1620-1980	2970	20,000	1.0	1100	✓

* Add suffix - L for RoHS Compliant

Dimensions



PULSE RATING CURVES

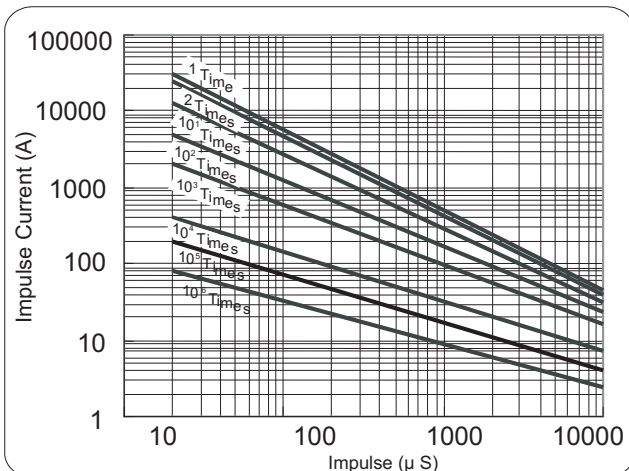

V-I CHARACTERISTIC CURVES

