



SHEET 1 OF 1




CONTACT CONFIGURATION
TIMING (BBM) NON-SHORTING

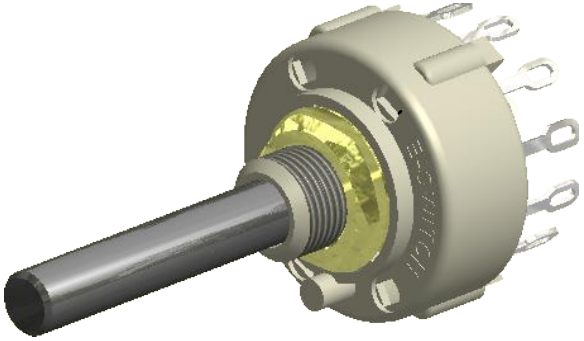

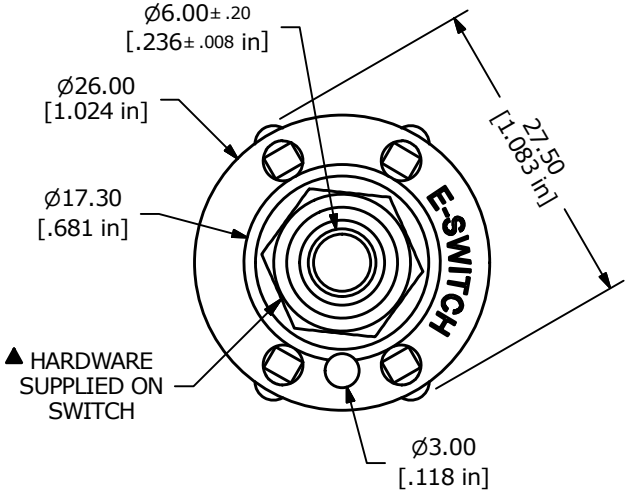

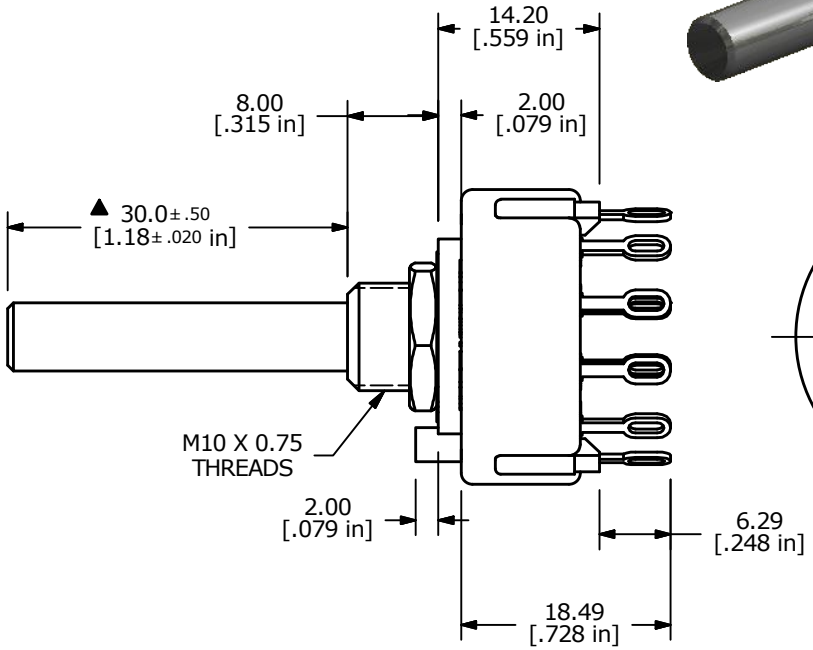

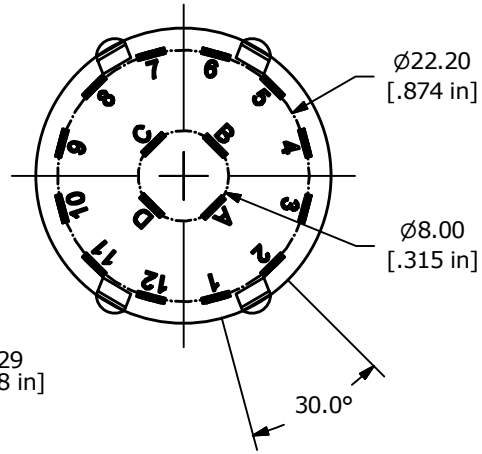

NOTE:
1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X = ± 0.4
   X.XX = ± 0.25
3. TERM. NOS. FOR REFERANCE ONLY.
4. CONTACT MATERIAL: SILVER
5. CONTACT RATING: 150MILLIAMP, 250VAC/DC
   350MILLIAMP, 110VAC/DC
6. TIMING: NON-SHORTING
7. OPERATING FORCE 0.8± 0.3 kg-cm
8. OPERATING TEMP: -30˚C to 85˚C
▲ 9. CIRUIT 4P: 3 POSITION 30˚ INDEX
10. DIELECTRIC STRENGTH: 1000V RMS MIN.@ SEA LEVEL
▲ 11. HARDWARE SUPPLIED ON SWITCH:
   LOCKWASHER, HEXNUT, LOCK RING
12. ▲ DENOTES CRITICAL PARAMETER.
13. 2011/65/EU (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
A	22714	NEW RELEASE	2/13/17	MJR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE KC43B30.002NLS

SCALE	DATE	DR	DWG	REV
3:2	2/13/2017	MJR	G530256	A