PRODUCT DATASHEET
HighBay series
last update 24/5/2017

DETAILS




Product Number	CS14895_HB-IP-2X6-RS
Family	HighBay
Type	Assembly
Color	clear
Diameter	173 + 71,4 mm
Height	11,39 mm
Style	rectang
Optic Material	PMMA
Holder Material	
Fastening	pin, screw
Status	production ready
ROHS Comliant	Yes
Date Updated	24/05/2017

OPTICAL PROPERTIES


LED	Viewing Angle	Light Beam	Effi-ciency	cd/lm	Connector
XM-L	21 deg	Real spot	94 %	5.100	-
XP-G2	13 deg	Real spot	94 %	10.600	-
XP-L	20 deg	Real spot	93 %	5.400	-
XP-L2	22 deg	Real spot	93 %	4.100	-
H35C1 (LEMWA33)	sim: 14	Real spot	sim: 93 %	sim: 9.900	-
LUXEON XR-TX (L2T0-xxyy012M)	14 deg	Real spot	92 %	10.120	-
LUXEON T	15 deg	Real spot	94 %	8.800	-
LUXEON 5050	sim: 23	Real spot	sim: 91 %	sim: 3.740	-
NVSxE21A	13 deg	Real spot	94 %	7.950	-
Oslon Square Gen3	sim: 12	Real spot	sim: 90 %	sim: 14.000	-
Duris P8	sim: 12	Real spot	sim: 89 %	sim: 13.000	-
Fortimo FastFlex LED board 2x6 DP G4	13 deg	Real spot	94 %	10.600	-
Z5M1/Z5M2	14 deg	Real spot	94 %	10.000	-
Z8Y22P	17 deg	Real spot	92 %	6.600	-

Ledil Oy
Salorankatu 10
24240 SALO, Finland


http://www.ledil.com
email: ledil@ledil.com
FAX: +358-2-733 8001

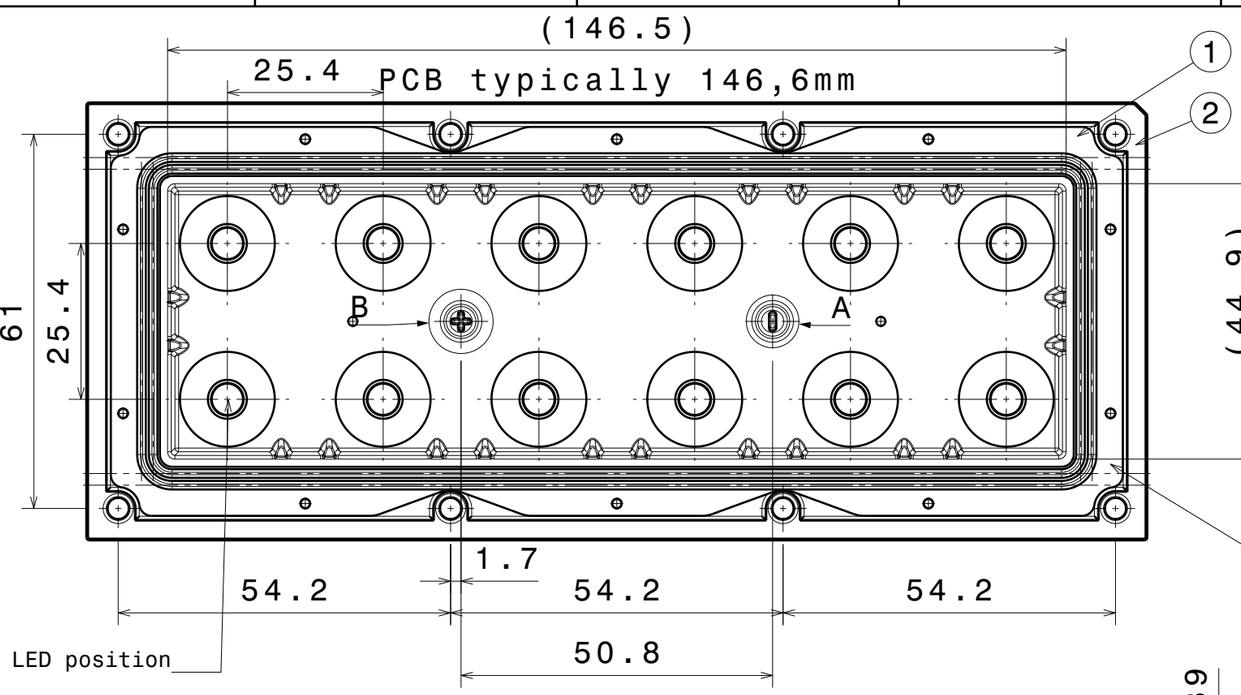


Wiring:
PCB is fully sealed between the lens with silicone seal and the heatsink. Wiring needs to be done through the PCB and heatsink to maintain high IP rating.



Detail A
Scale 2:1




Detail B
Scale 2:1




Section view D-D
Scale 2:1

Silicone seal is tested to work in LEDiL test assemblies. Customer is recommended to test the sealing in the end product due many variables, such as heat sink surface and possible chemical traces

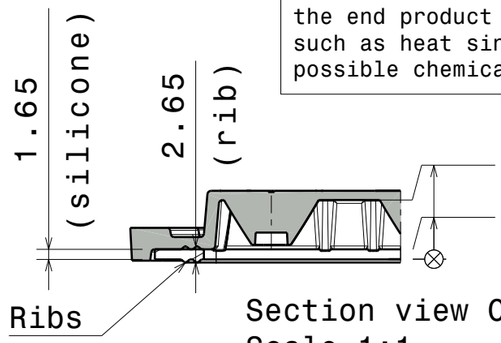

Section view C-C
Scale 1:1

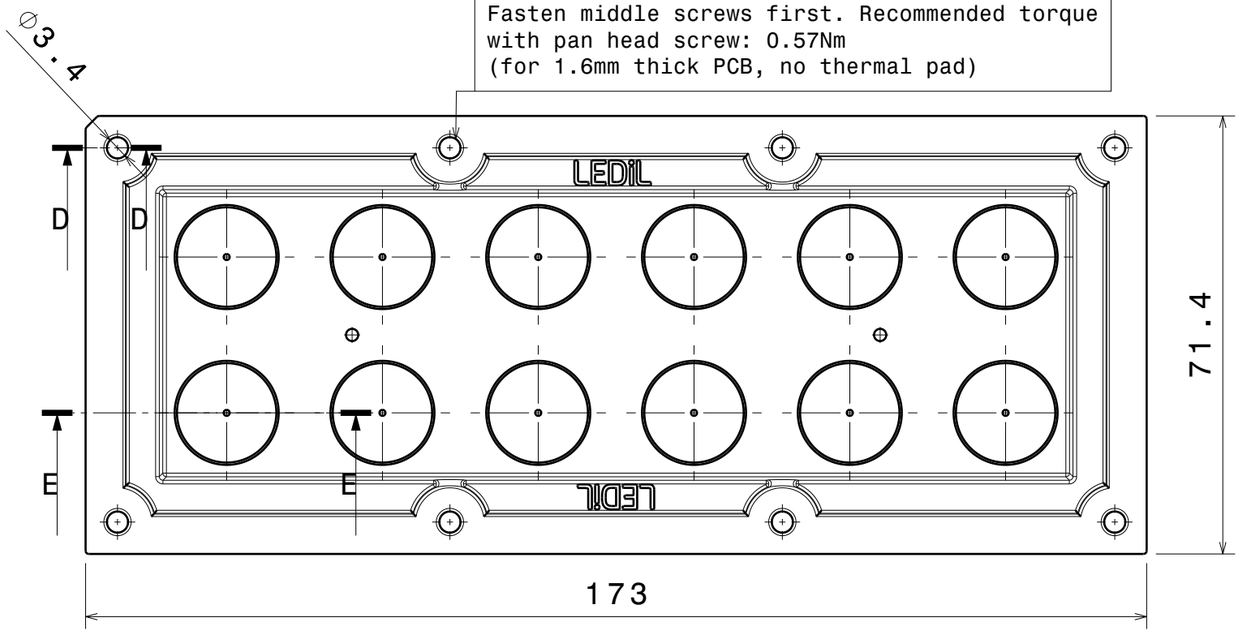

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	C14018	2X6-SEAL25	Silicone	
2	C14887	HB-IP-2X6-RS	PMMA	clear

Tolerances if not otherwise shown
According to DIN ISO 2768-1
Linear measures:
up to 30mm class M, otherwise class C
According to DIN ISO 2768-2
Form and position: class L

THIRD ANGLE PROJECTION:


This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.

Ledil Oy
Salorankatu 10
FIN 24240 SALO
Finland


DRAWING TITLE
CS14895_HB-IP-2X6_Mechanical model

SIZE	PART NUMBER		
A3	CS14895		
SCALE 1:1	WEIGHT 58,8 g		SHEET 1/1


Luminaire: LEDiL Oy CS14895_HB-IP-2X6-RS_(XM-L)
Lamps: 1 x Cree_XM-L_(XMLAWT-00-0000-000LT20E7)_980.828lm@250mA_P=8.1232W_I=0.250A

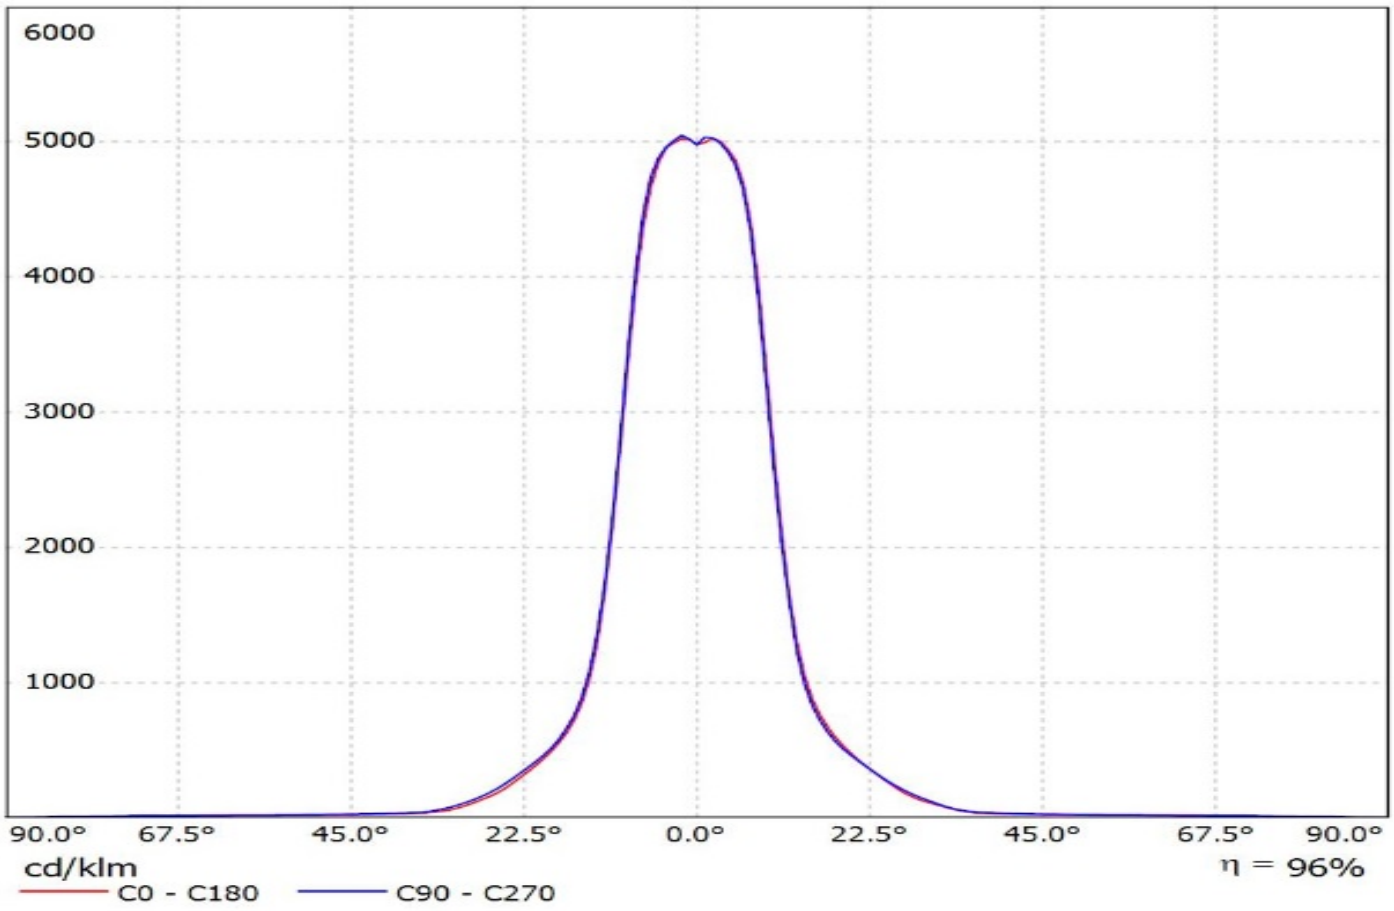


Luminaire: LEDiL Oy CS14895_HB-IP-2X6-RS
Lamps: 1 x Cree_XP-G2_1235.27lm@250mA_P=8.6001W_I=0.25A

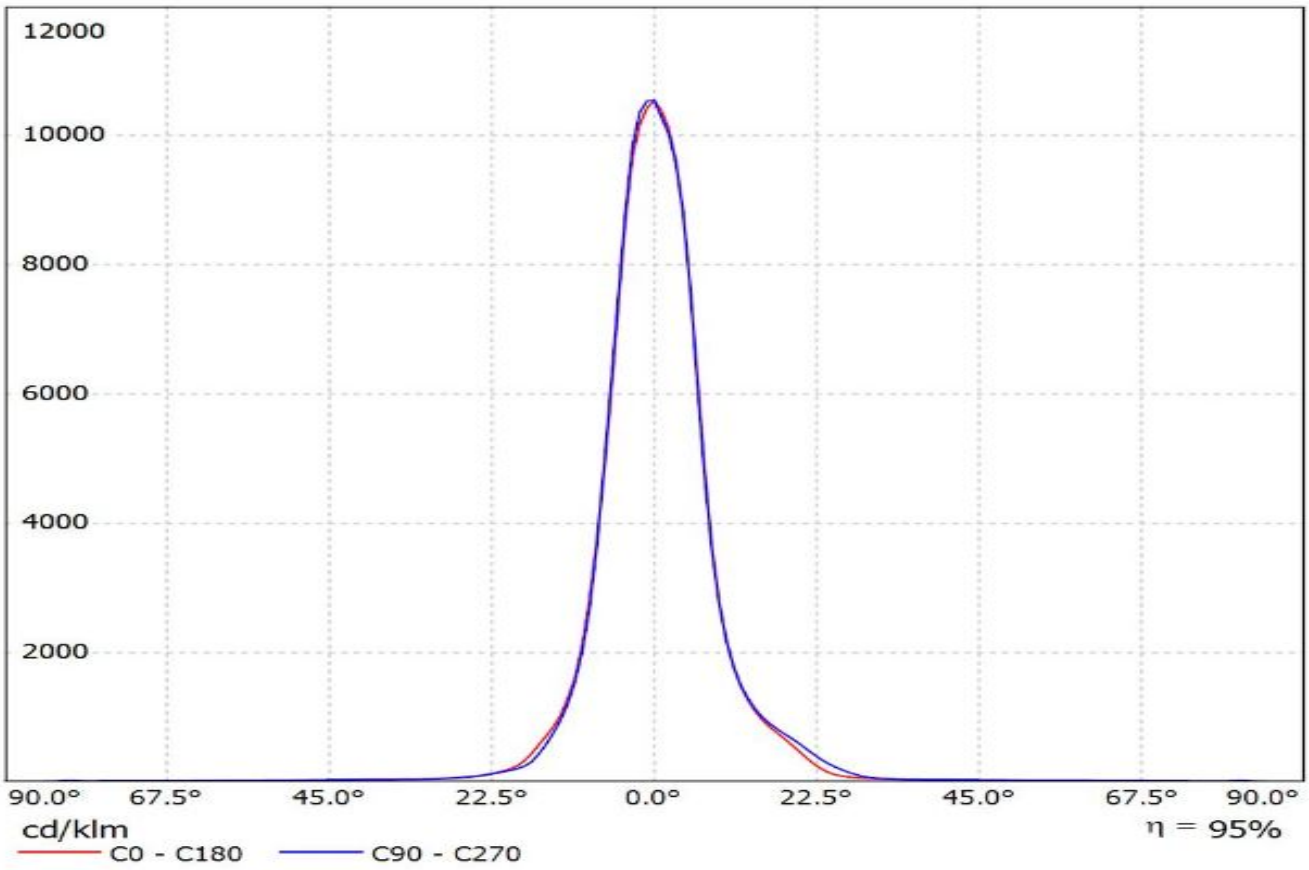


Luminaire: LEDiL Oy CS14895_HB-IP-2X6-RS_(XP-L)
Lamps: 1 x Cree_XP-L_(XPLAWT-0-7A3-U50-0H-0001)_1258.85lm@250mA_P=8.27562W_I=0.250A

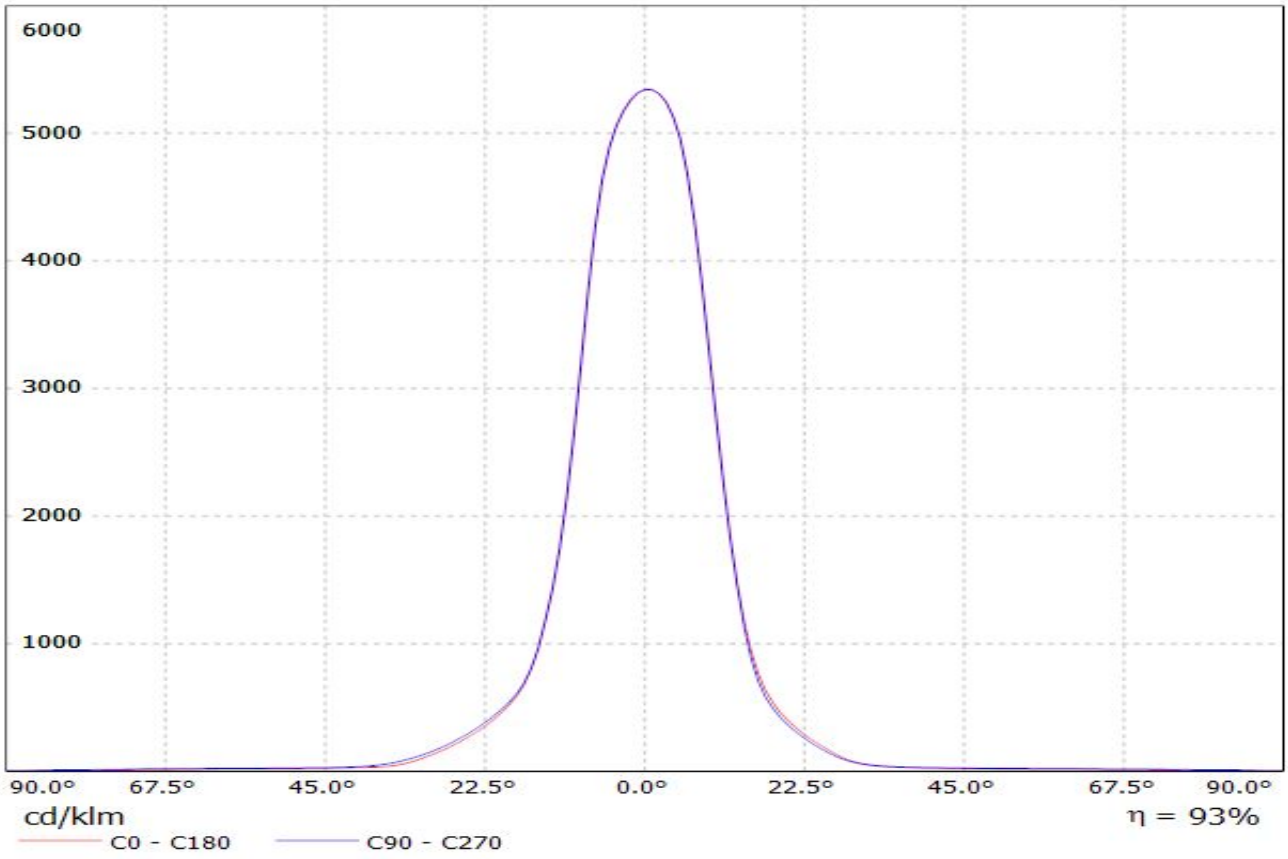


Luminaire: Ledil CS14895_HB-IP-2X6-RS_(XP-L2)
Lamps: 1 x Cree_XP-L2_2x6_1659.4lm@250mA_P=8.22525W_I=0.25A

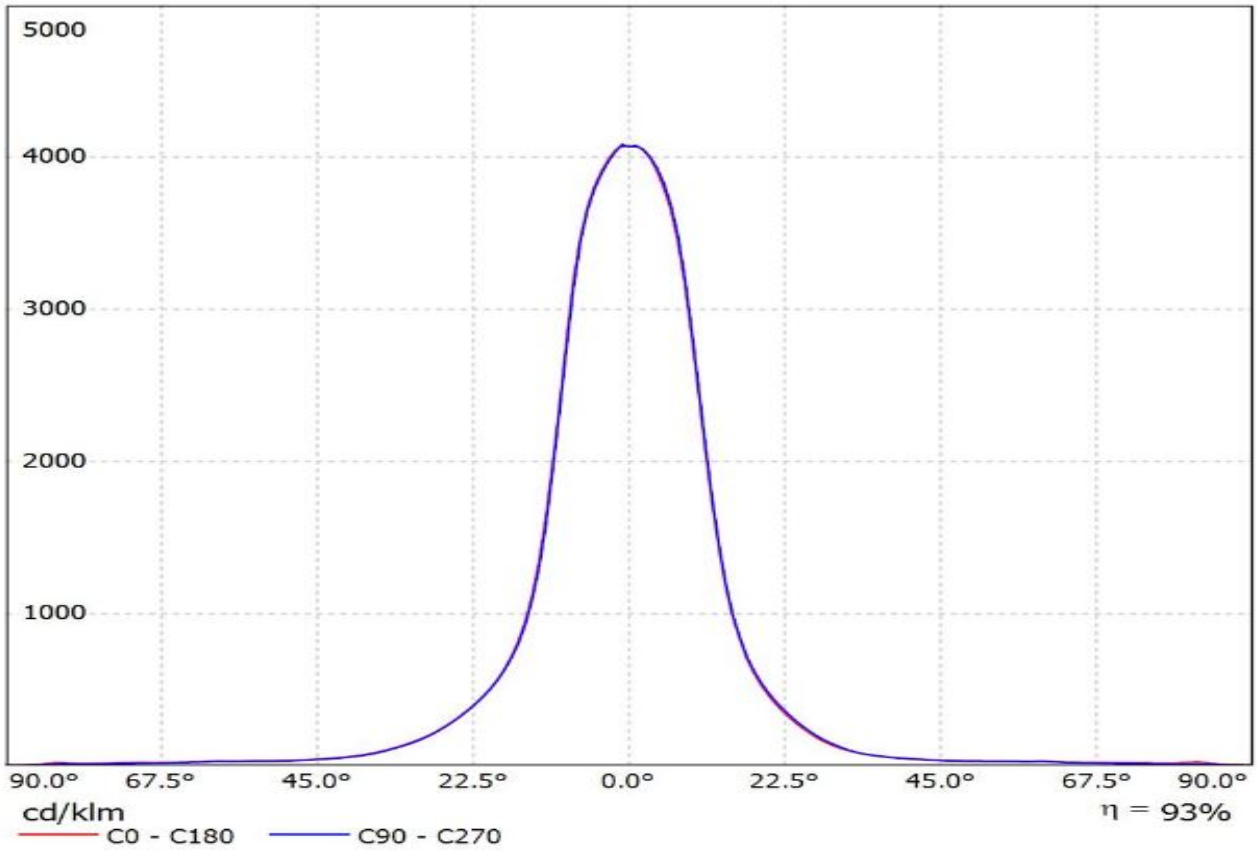


Luminaire: Ledil Oy CS14895_HB-IP-2X6-RS_(H35C1)_SIMULATED
Lamps: 1 x LG H35C1

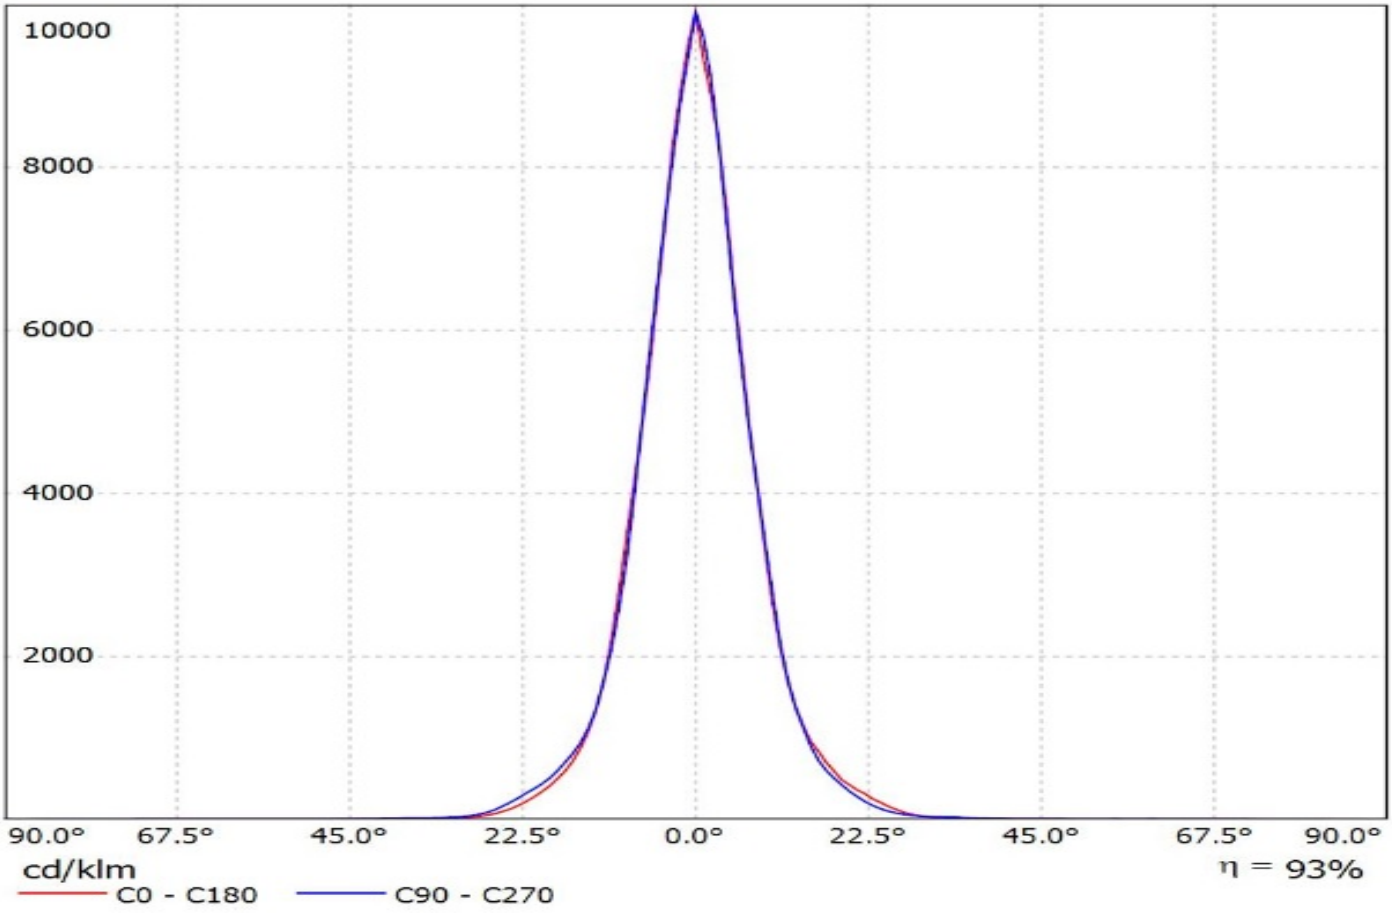


Luminaire: Ledil CS14895_HB-IP-2X6-RS_(XR-TX)
Lamps: 1 x Luxeon_XR-TX_1376.41lm@250mA_P=8.3920W_I=0.250A

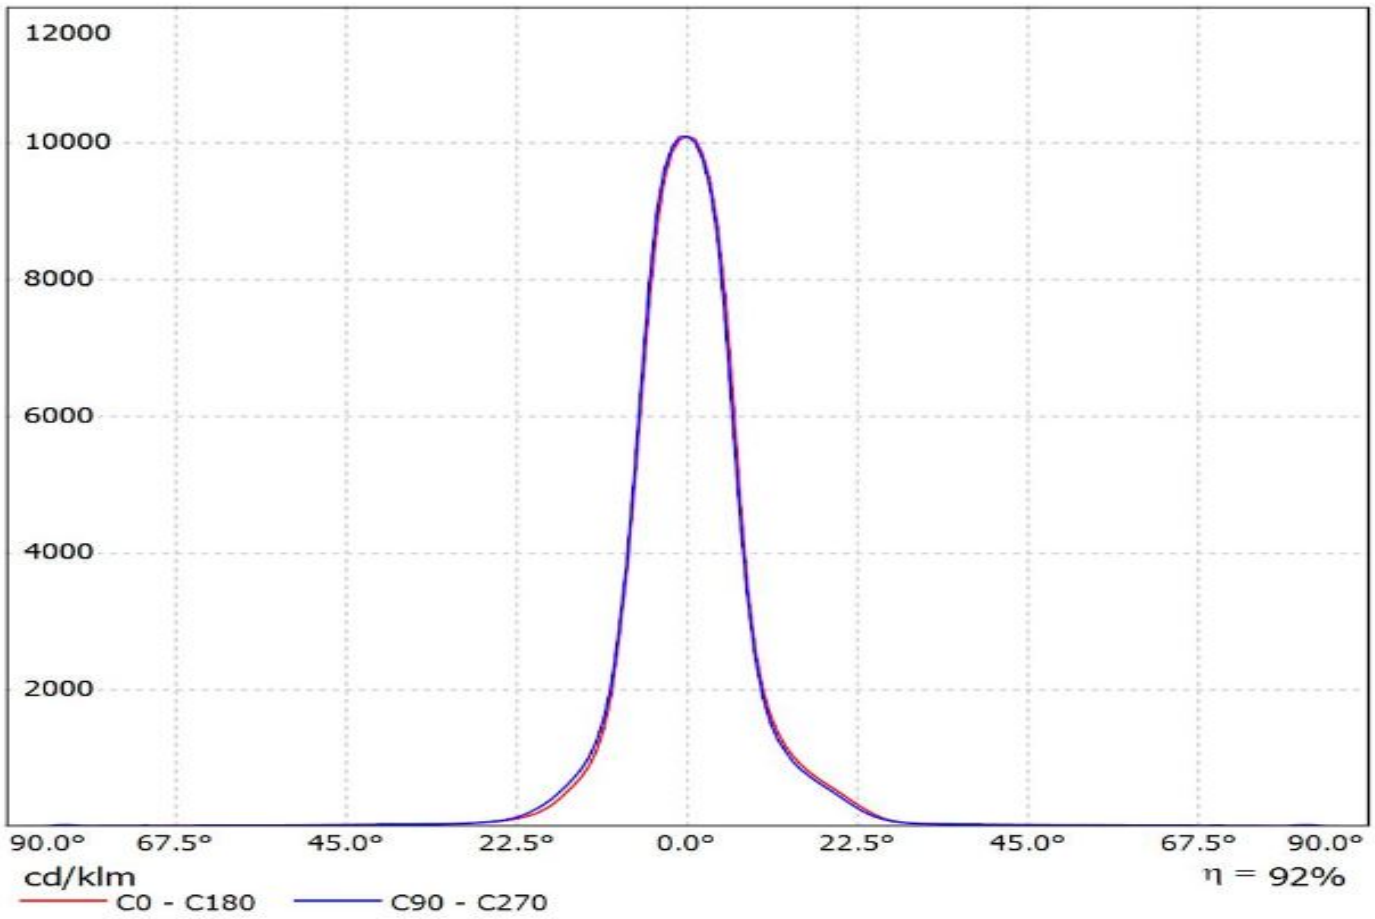


Luminaire: LEDiL Oy CS14895_HB-IP-2X6-RS_(Luxeon_T)
Lamps: 1 x Luxeon_T_(LXH8-FW30)_1040.41lm@250mA_P=8.49754W_I=0.250A

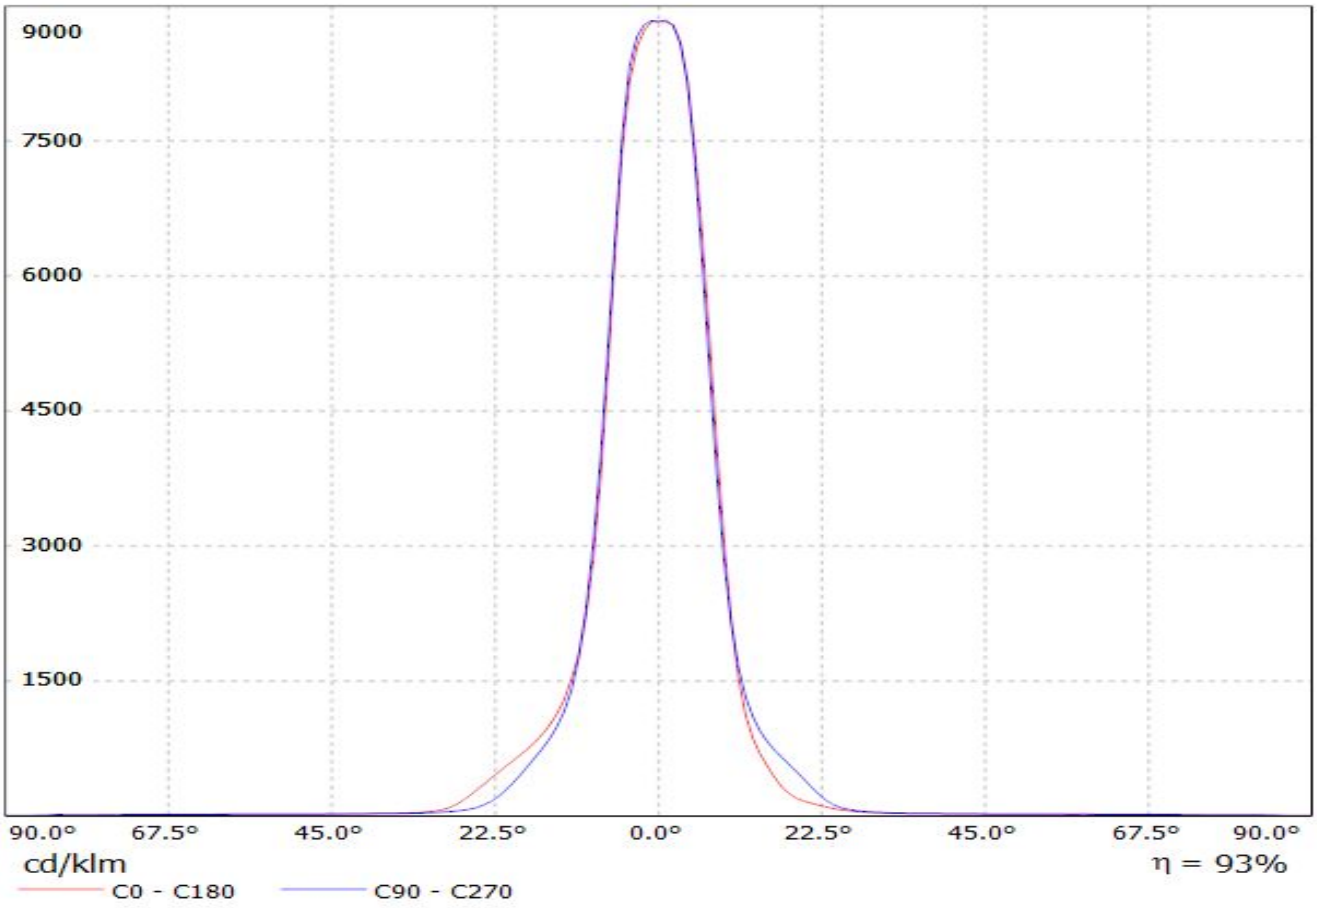


Luminaire: Ledil Oy CS14895_HB-IP-2X6-RS_LUXEON-5050_SIMULATED
Lamps: 1 x Lumileds Luxeon 5050

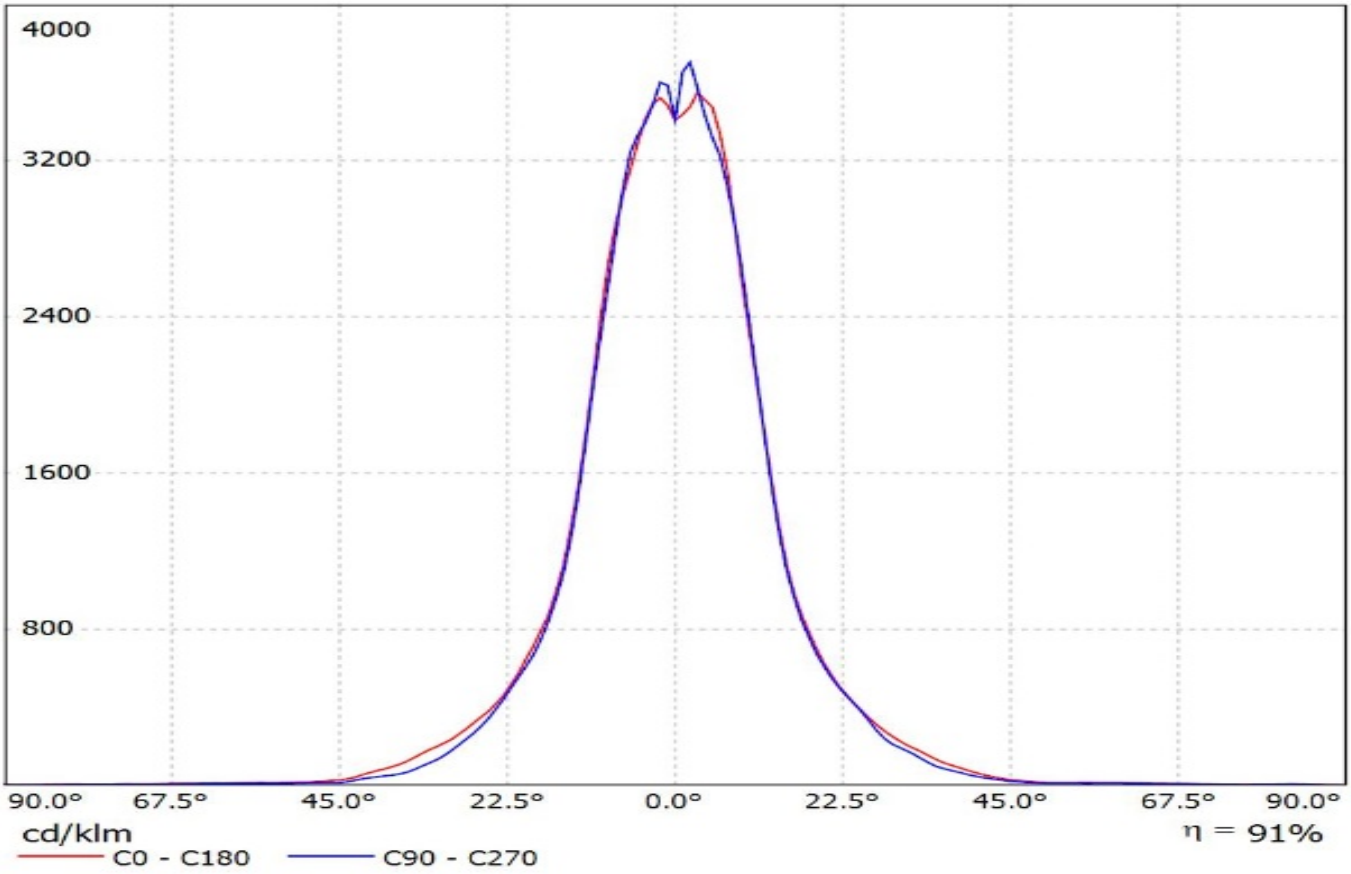


Luminaire: LEDiL Oy CS14895_HB-IP-2X6-RS_(Nichia_E21)
Lamps: 1 x Nichia_NVSWE21A_583.232lm@600mA_P=3.51742W_I=0.600A

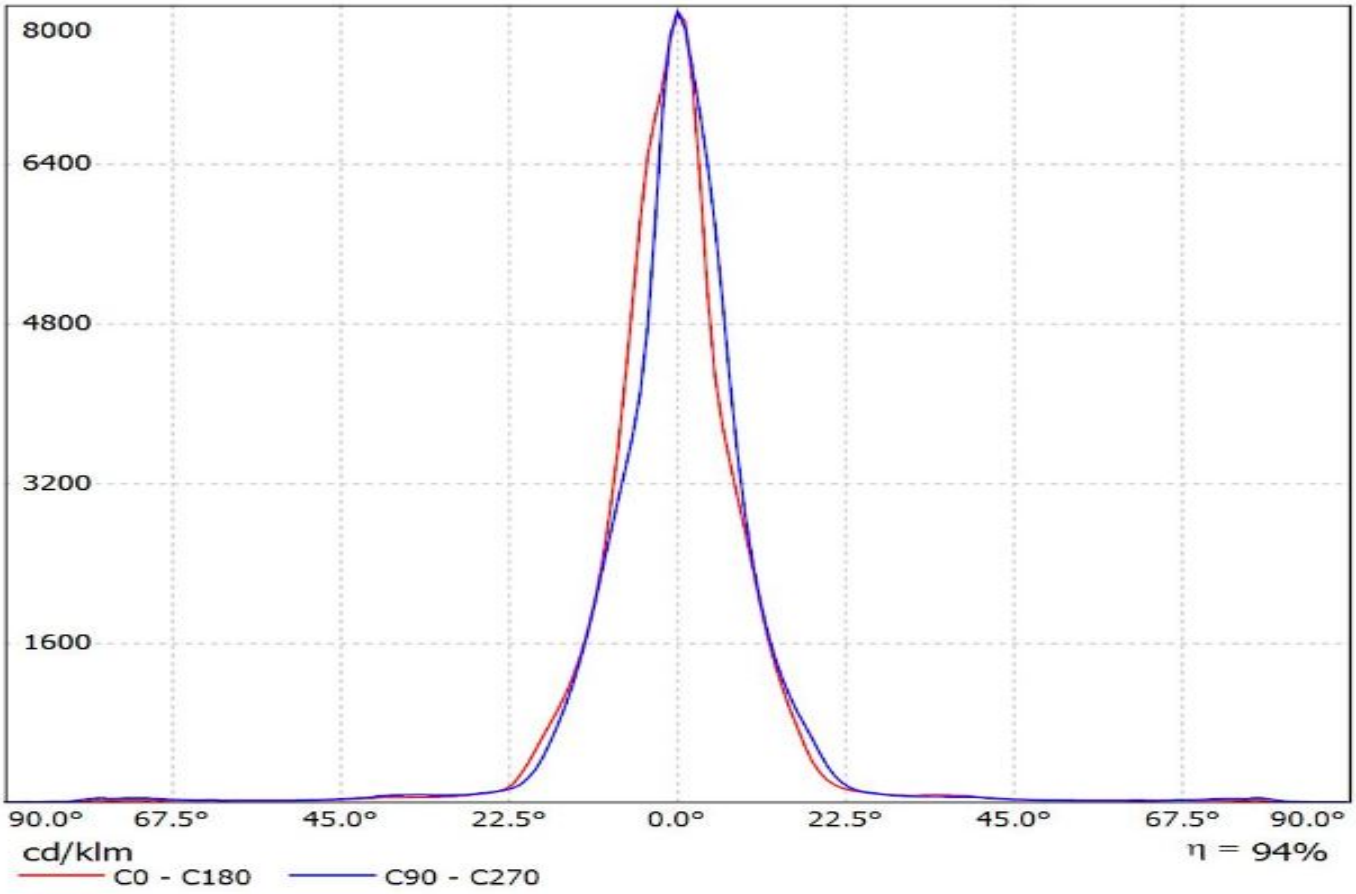


Luminaire: Ledil Oy CS14895_HB-IP-2X6-RS_(Duris_P8)_SIMULATED
Lamps: 1 x OSram Duris P8

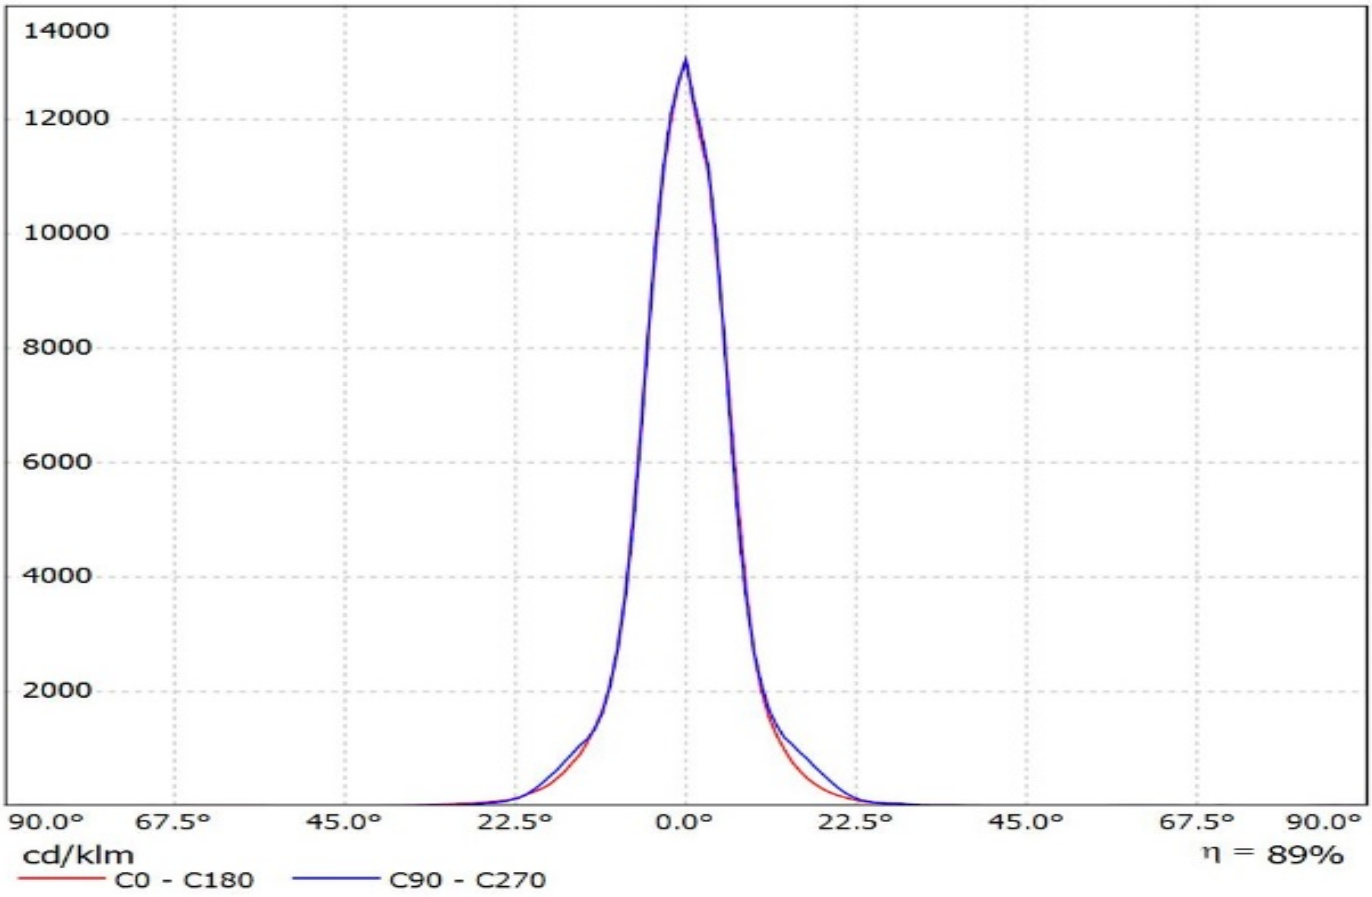


Luminaire: LEDiL Oy CS14895_HB-IP-2X6-RS_Fortimo FastFlex LED board 2x6 DP G4
Lamps: 1 x Fortimo FastFlex LED board 2x6 DP G4

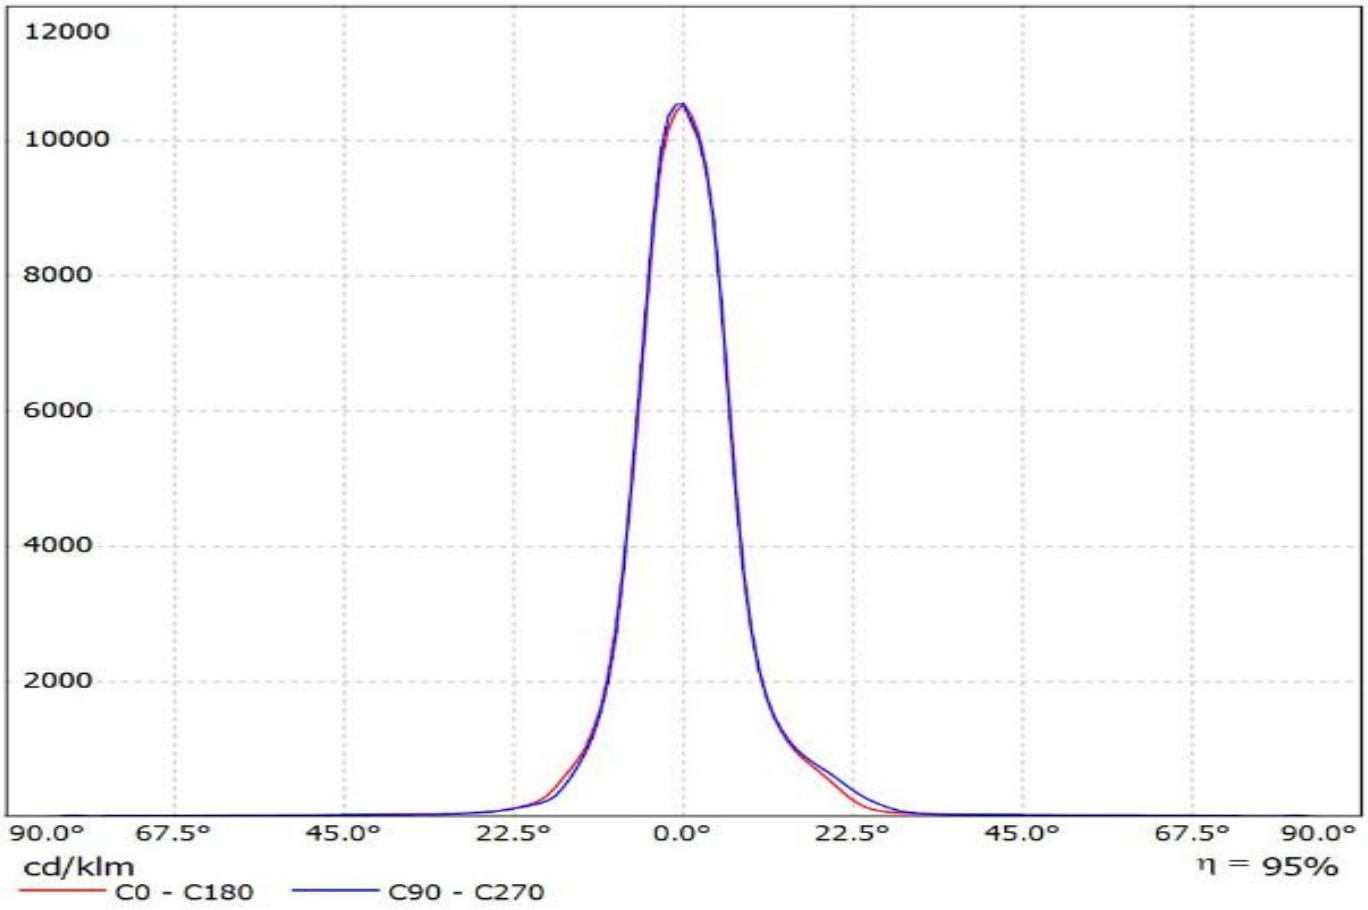


Luminaire: LEDiL Oy CS14895_HB-IP-2X6-RS_(Z5M2)
Lamps: 1 x Seoul_Z5M2_2x6_(SZ5-M2-W0-00)_1510.16lm@250mA_P=8.57039W_I=0.25A

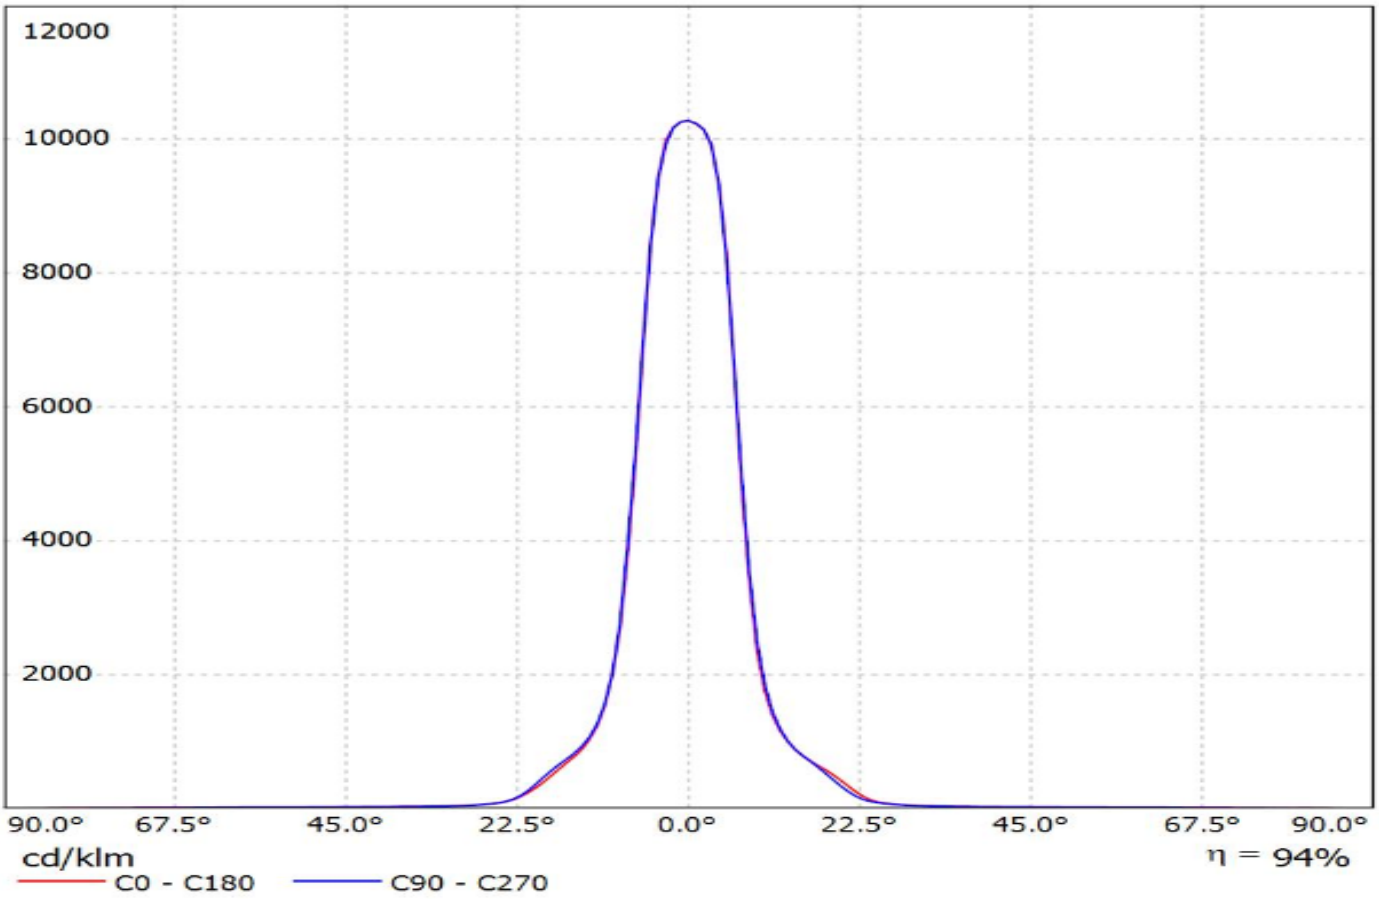


Luminaire: Ledil CS14895_HB-IP-2X6-RS_(Z8Y22_PLUS)
Lamps: 1 x Seoul_Z8Y22_PLUS_2X6_(SZ8-Y22-W0-C7P)1489.65lm@250mA_P=8.30675W_I=0.250A

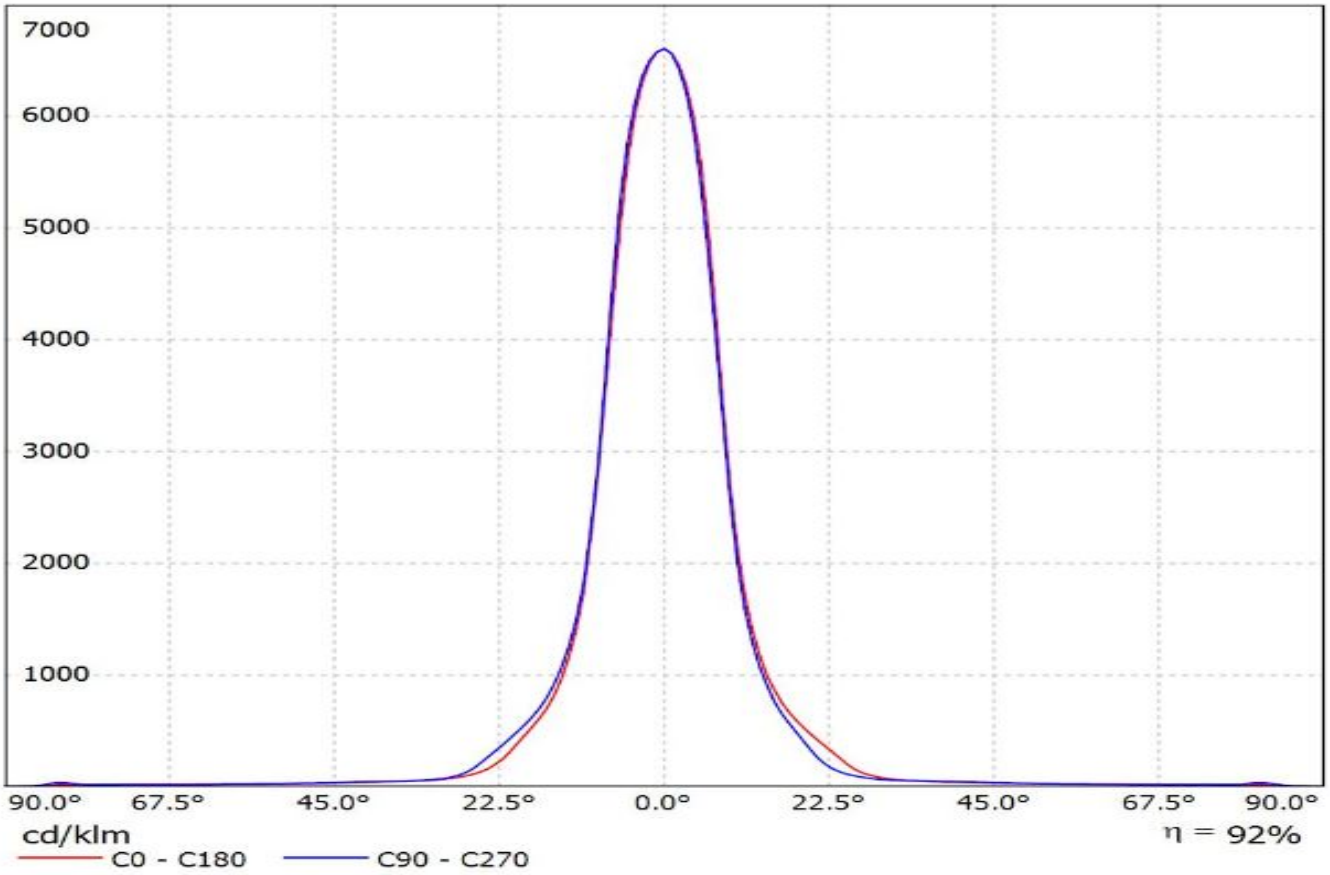


Luminaire: LEDiL Oy CS14895_HB-IP-2X6-RS_(XM-L)
Lamps: 1 x Cree_XM-L_(XMLAWT-00-0000-000LT20E7)_980.828lm@250mA_P=8.1232W_I=0.250A

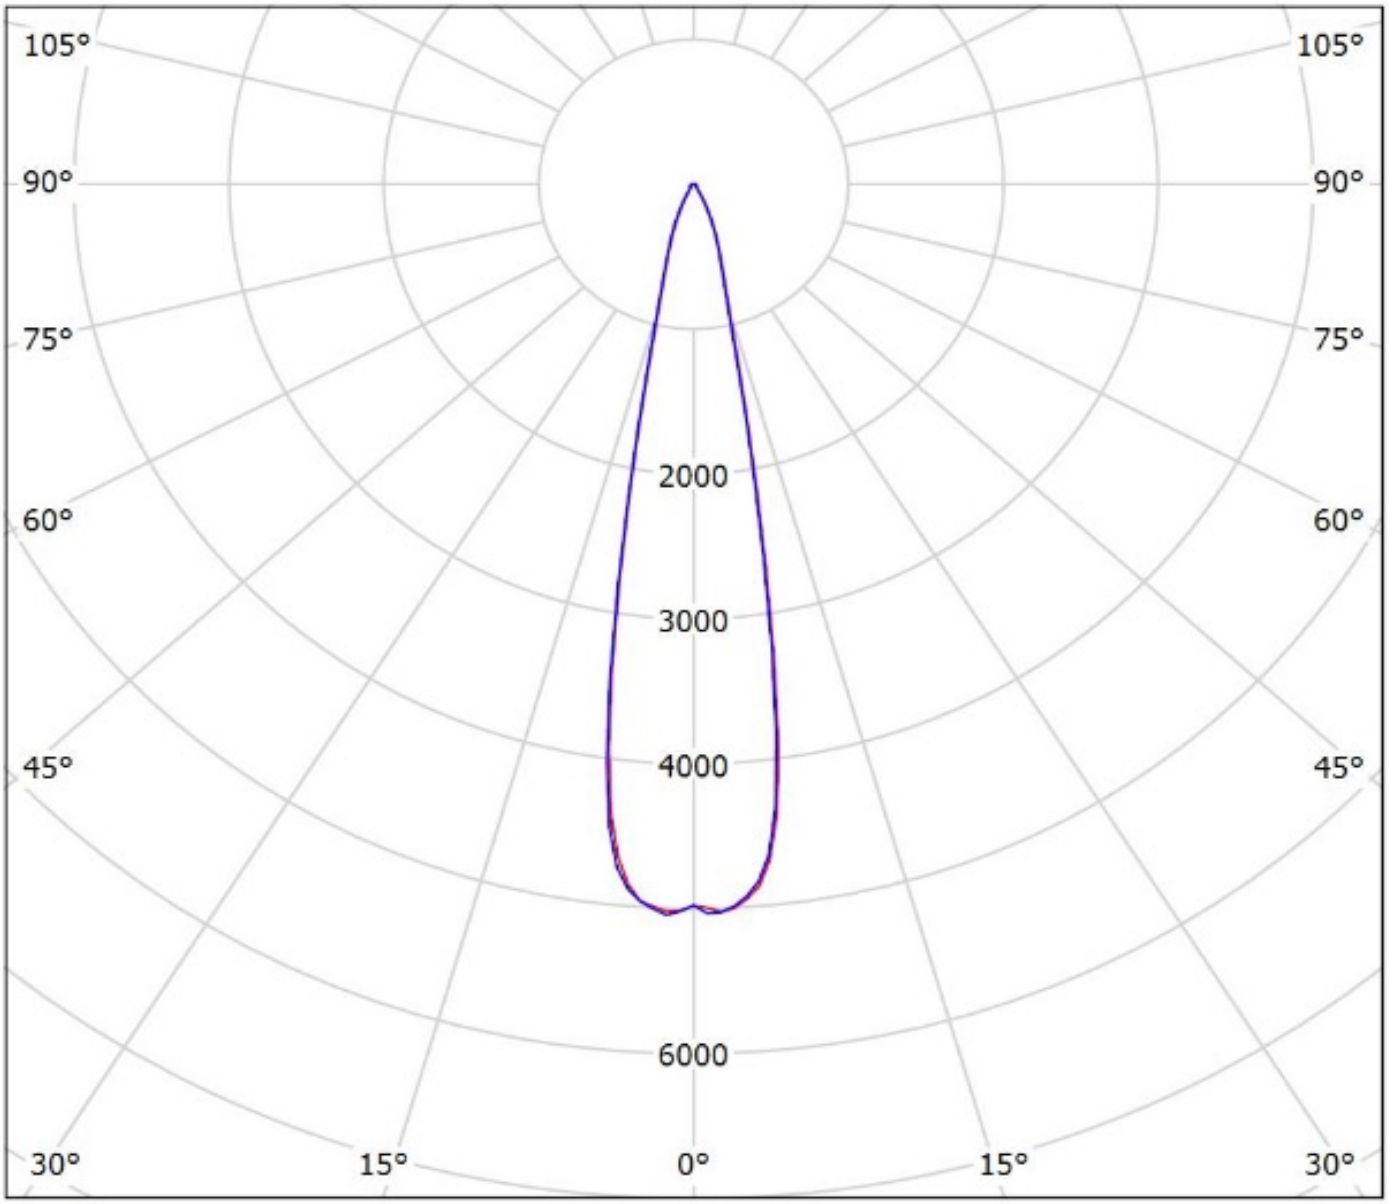

Luminaire: LEDiL Oy CS14895_HB-IP-2X6-RS
Lamps: 1 x Cree_XP-G2_1235.27lm@250mA_P=8.6001W_I=0.25A

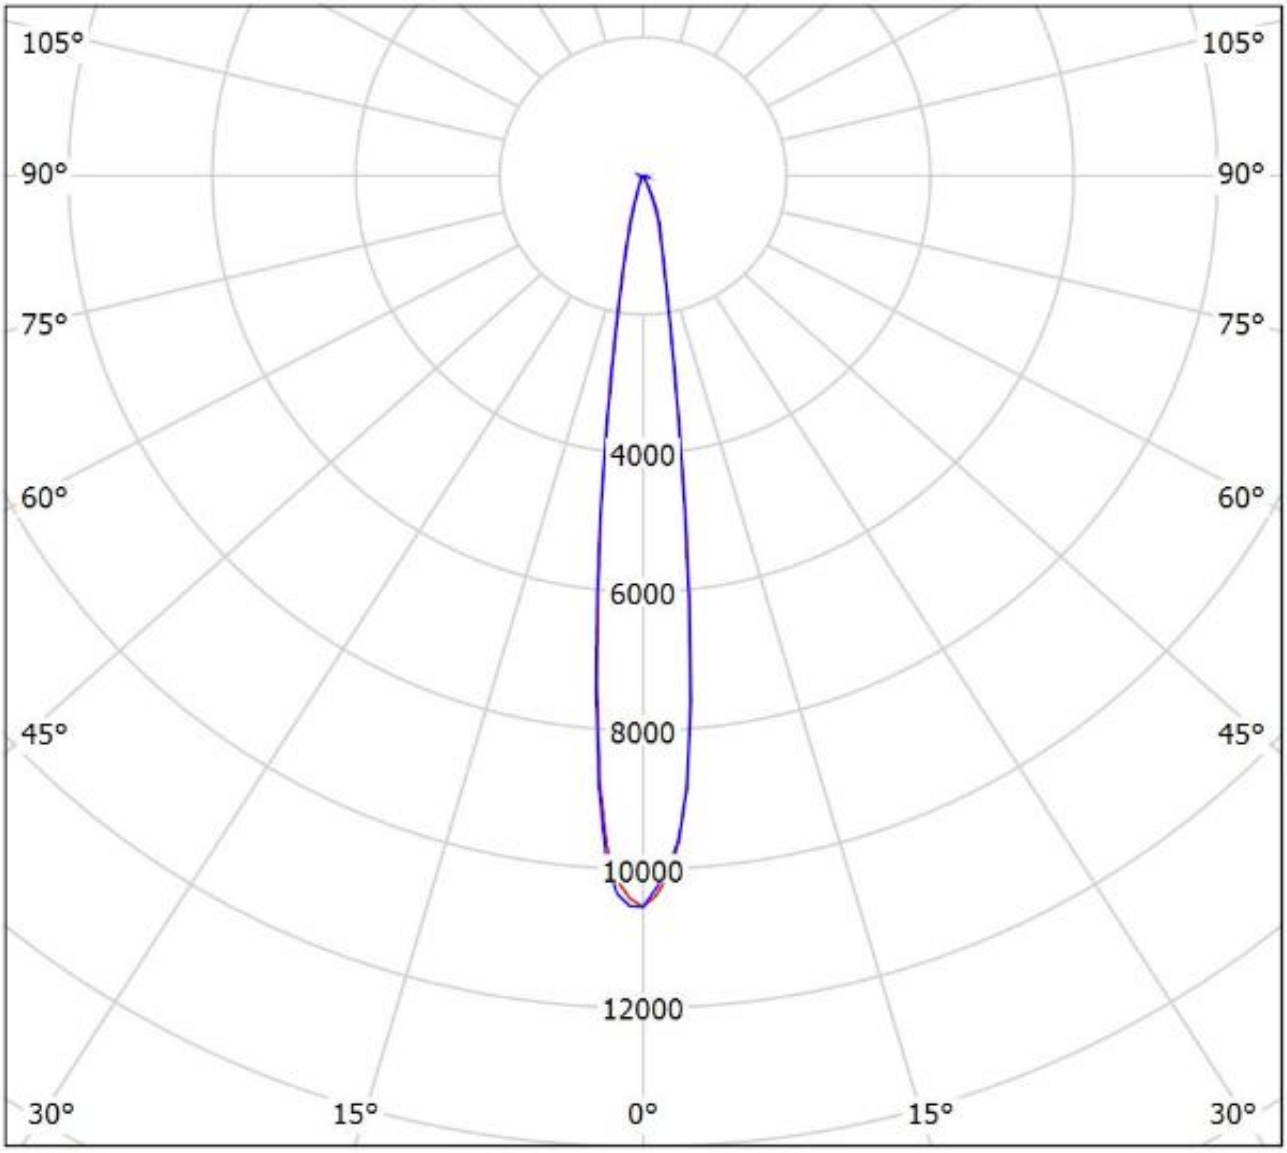

Luminaire: LEDiL Oy CS14895_HB-IP-2X6-RS_(XP-L)
Lamps: 1 x Cree_XP-L_(XPLAWT-0-7A3-U50-0H-0001)_1258.85lm@250mA_P=8.27562W_I=0.250A

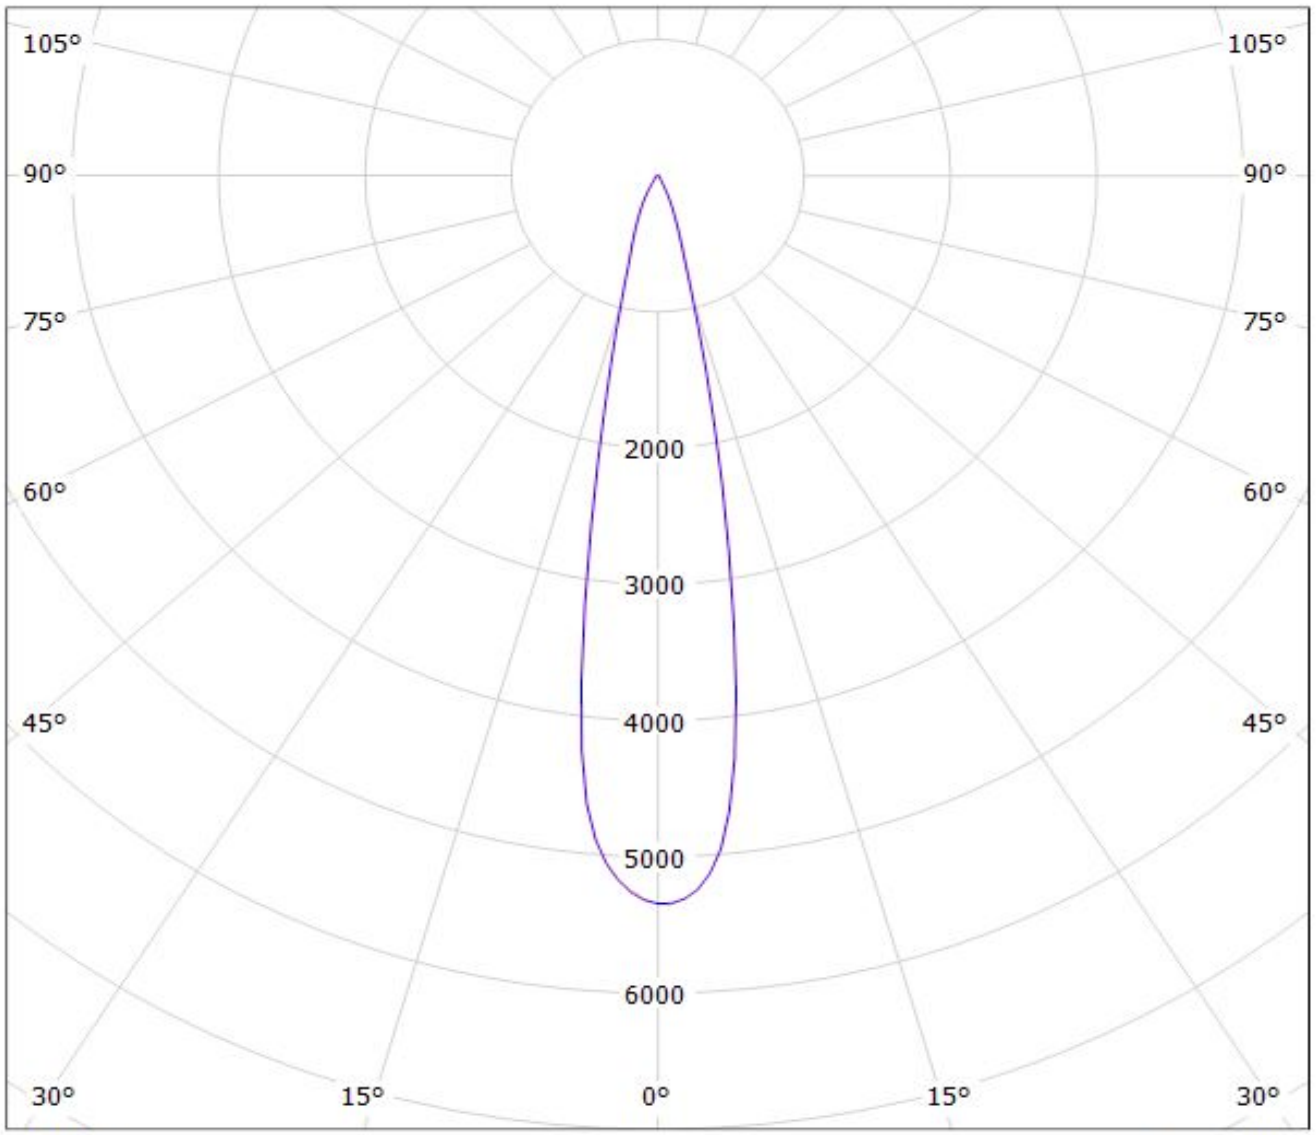


cd/klm

η = 93%

C0 - C180 C90 - C270

Luminaire: Ledil CS14895_HB-IP-2X6-RS_(XP-L2)
Lamps: 1 x Cree_XP-L2_2x6_1659.4lm@250mA_P=8.22525W_I=0.25A

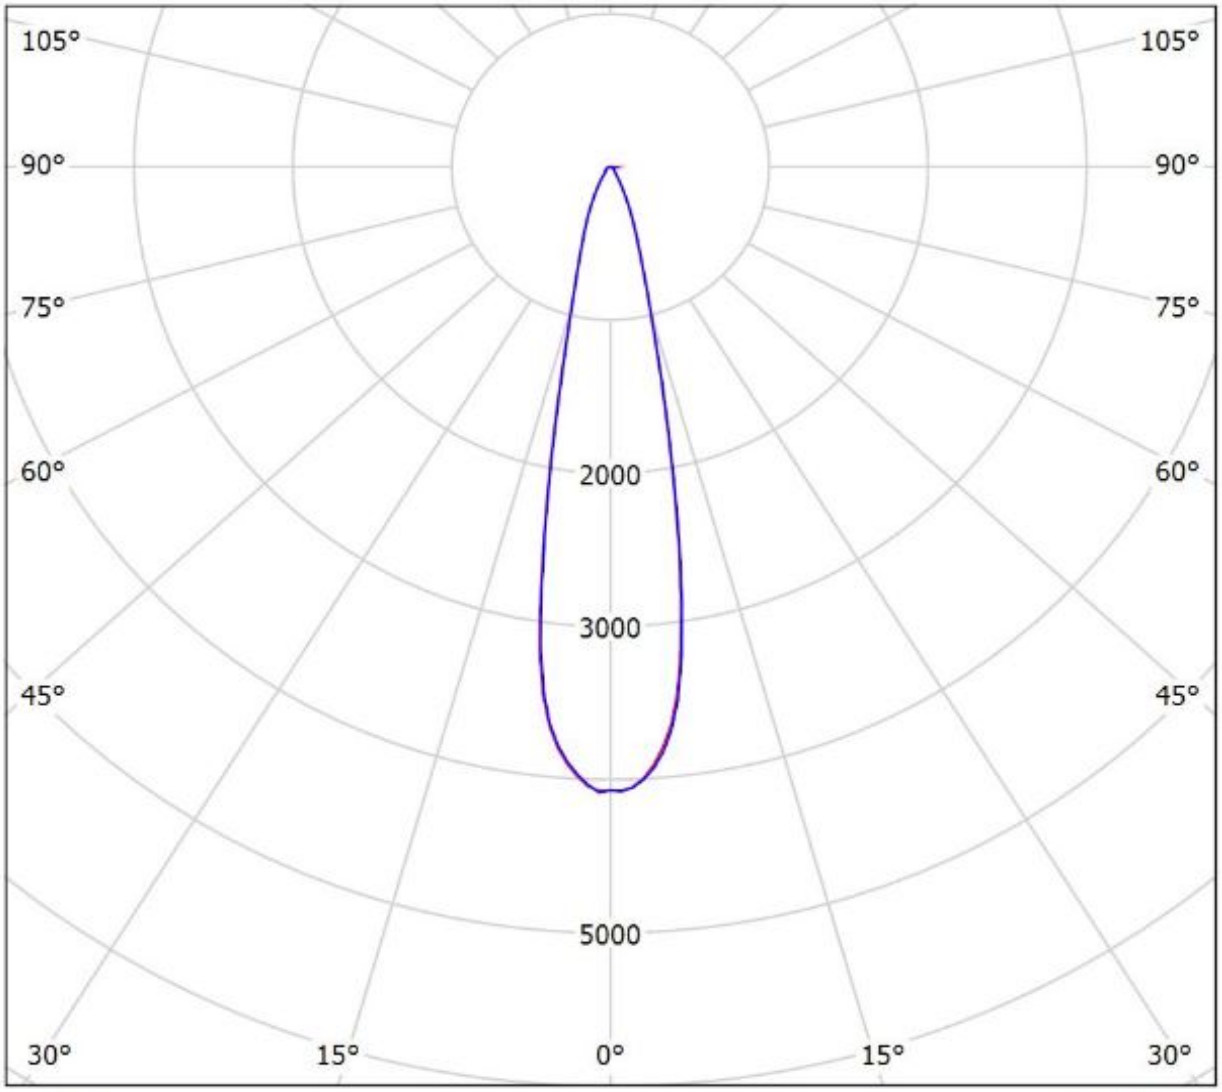


cd/klm


η = 93%

C0 - C180 C90 - C270


Luminaire: Ledil Oy CS14895_HB-IP-2X6-RS_(H35C1)_SIMULATED
Lamps: 1 x LG H35C1

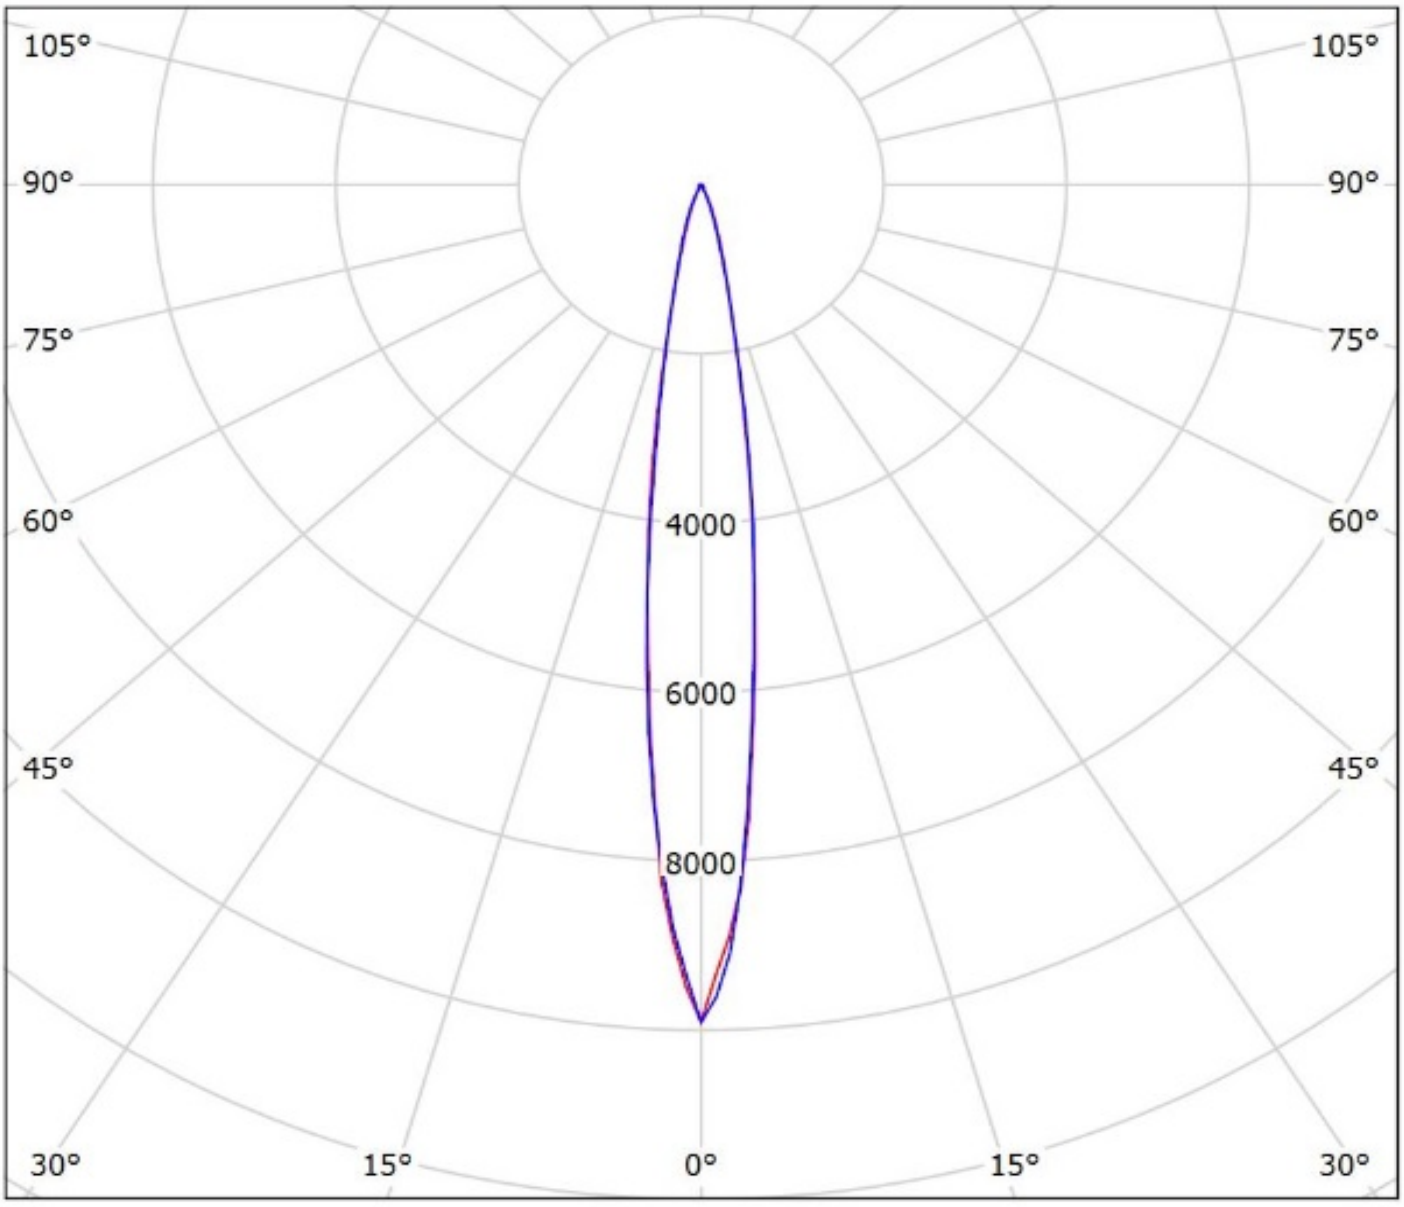

Luminaire: Ledil CS14895_HB-IP-2X6-RS_(XR-TX)
Lamps: 1 x Luxeon_XR-TX_1376.41lm@250mA_P=8.3920W_I=0.250A

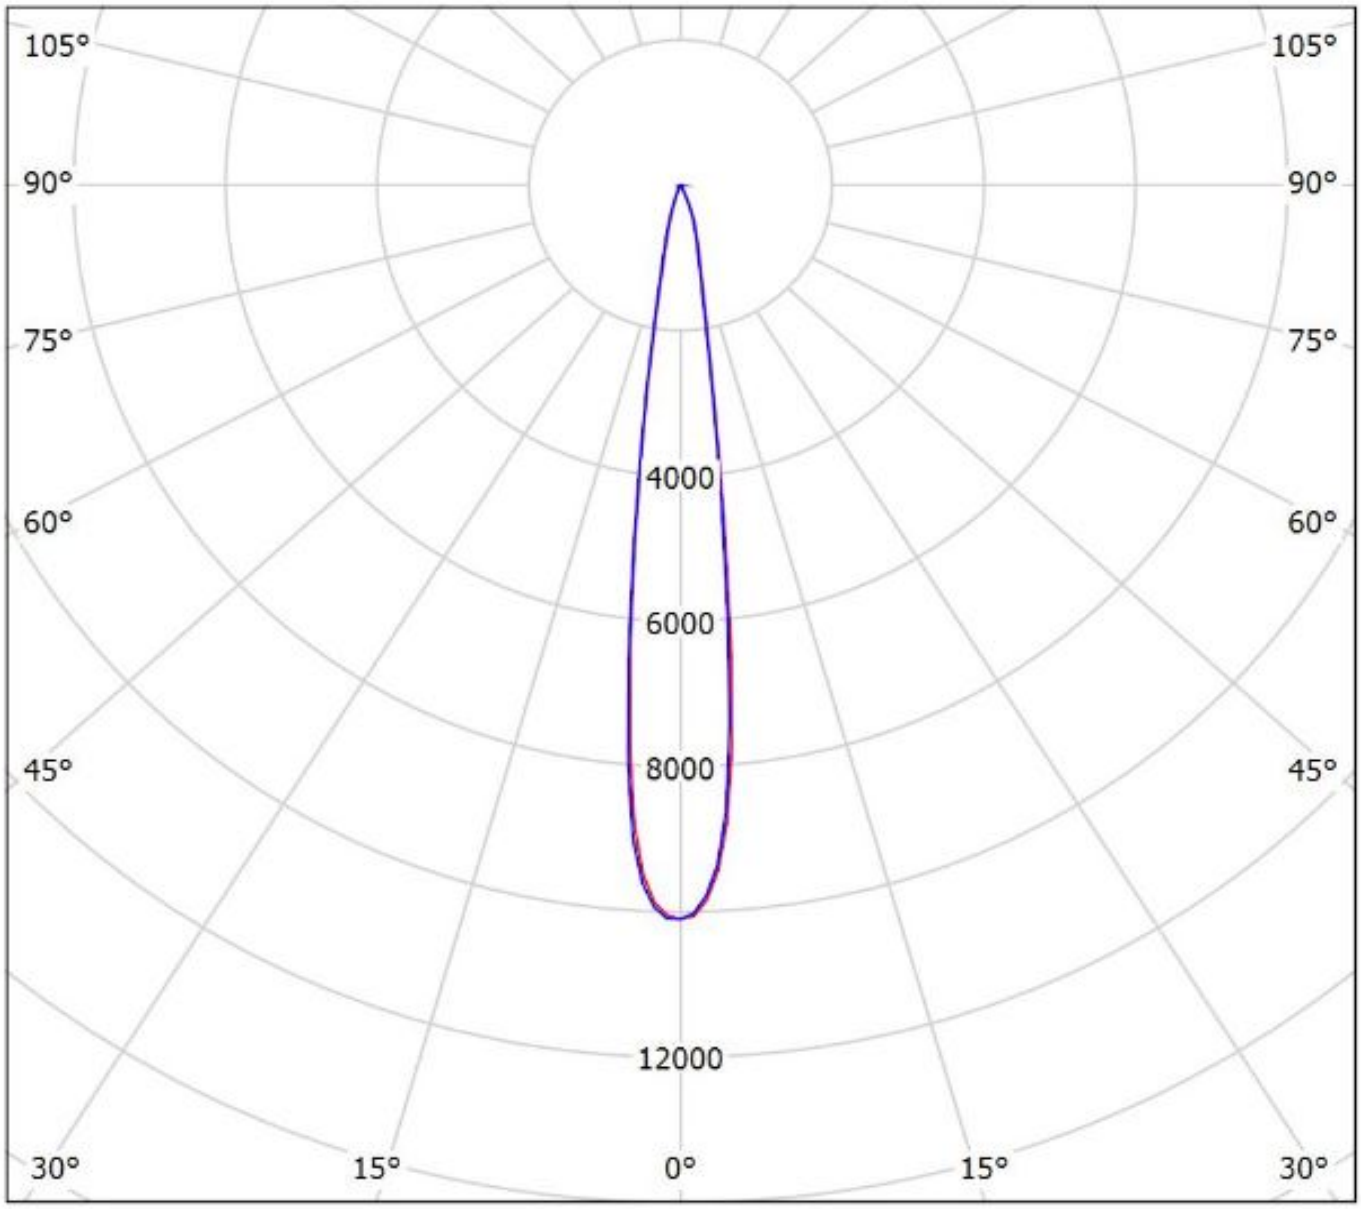

Luminaire: LEDiL Oy CS14895_HB-IP-2X6-RS_(Luxeon_T)
Lamps: 1 x Luxeon_T_(LXH8-FW30)_1040.41lm@250mA_P=8.49754W_I=0.250A

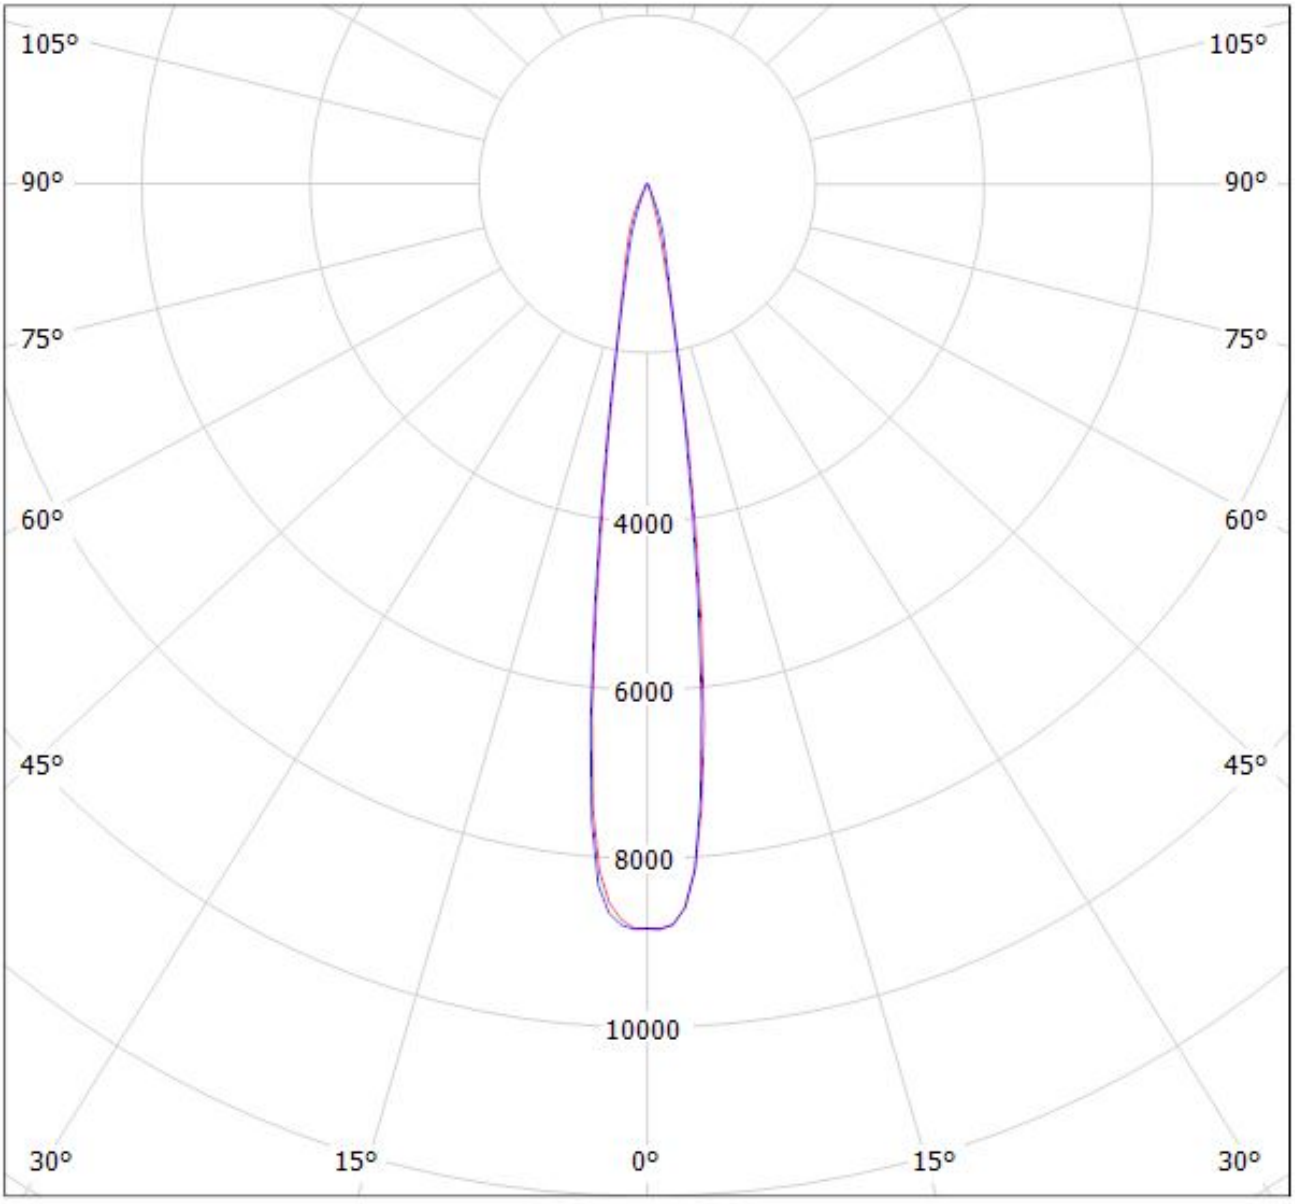


cd/klm

η = 93%

C0 - C180 C90 - C270

Luminaire: Ledil Oy CS14895_HB-IP-2X6-RS_LUXEON-5050_SIMULATED
Lamps: 1 x Lumileds Luxeon 5050

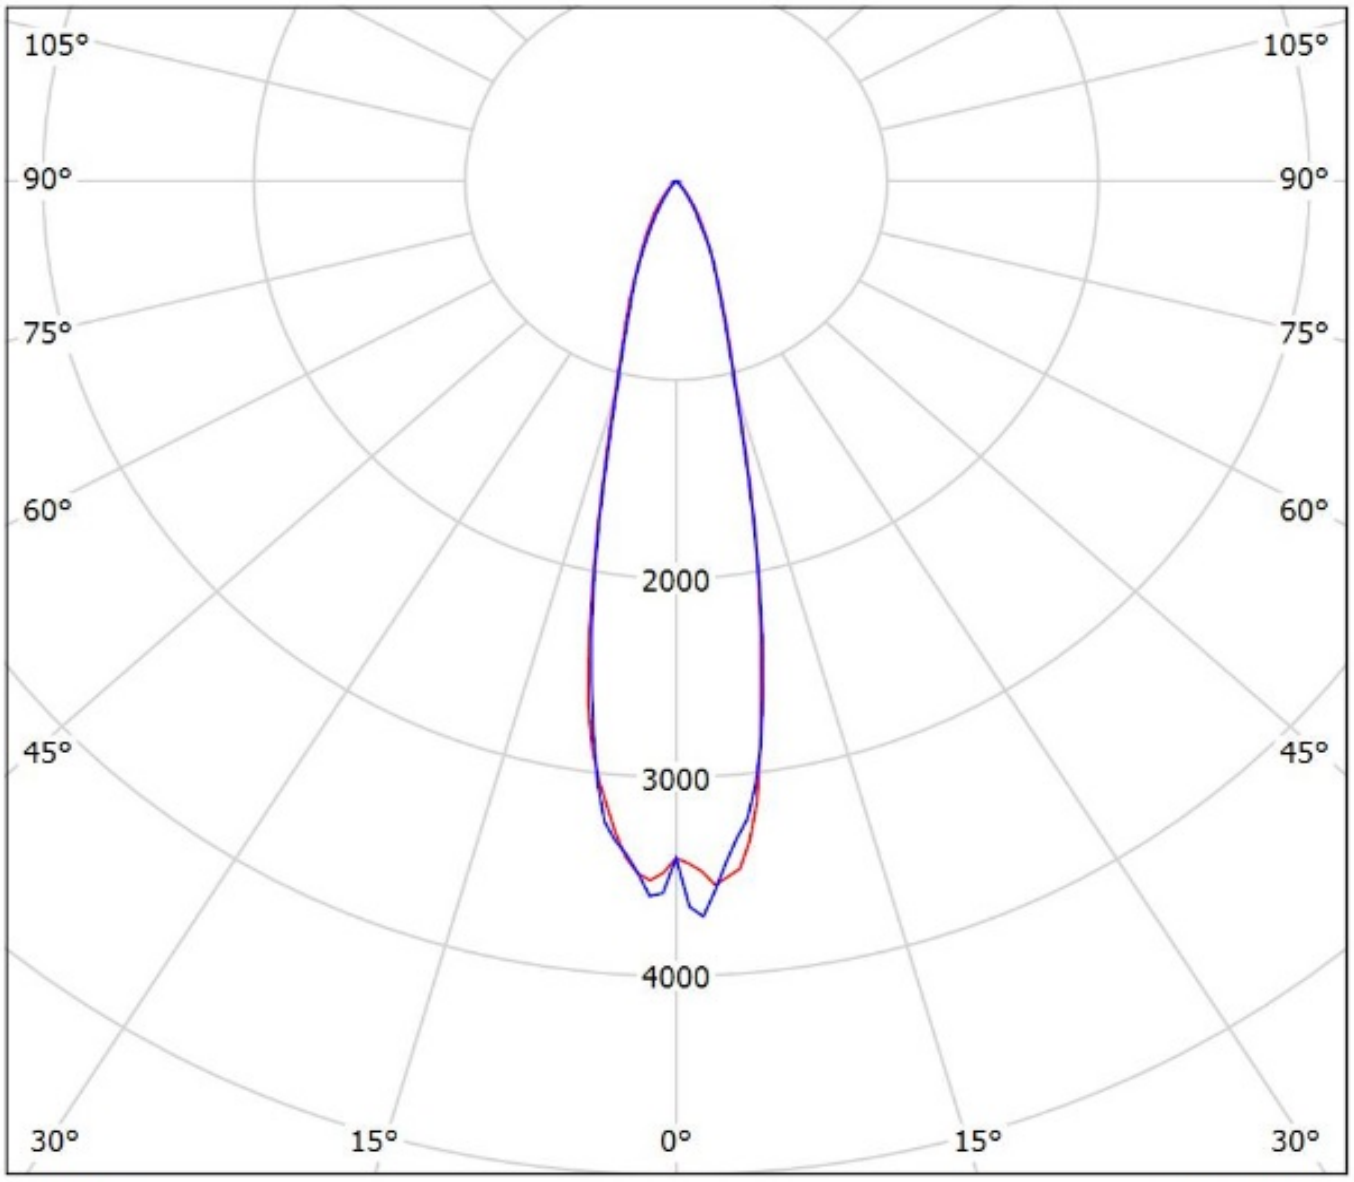


cd/klm

η = 91%

C0 - C180 C90 - C270

Luminaire: LEDiL Oy CS14895_HB-IP-2X6-RS_(Nichia_E21)
Lamps: 1 x Nichia_NVSWE21A_583.232lm@600mA_P=3.51742W_I=0.600A

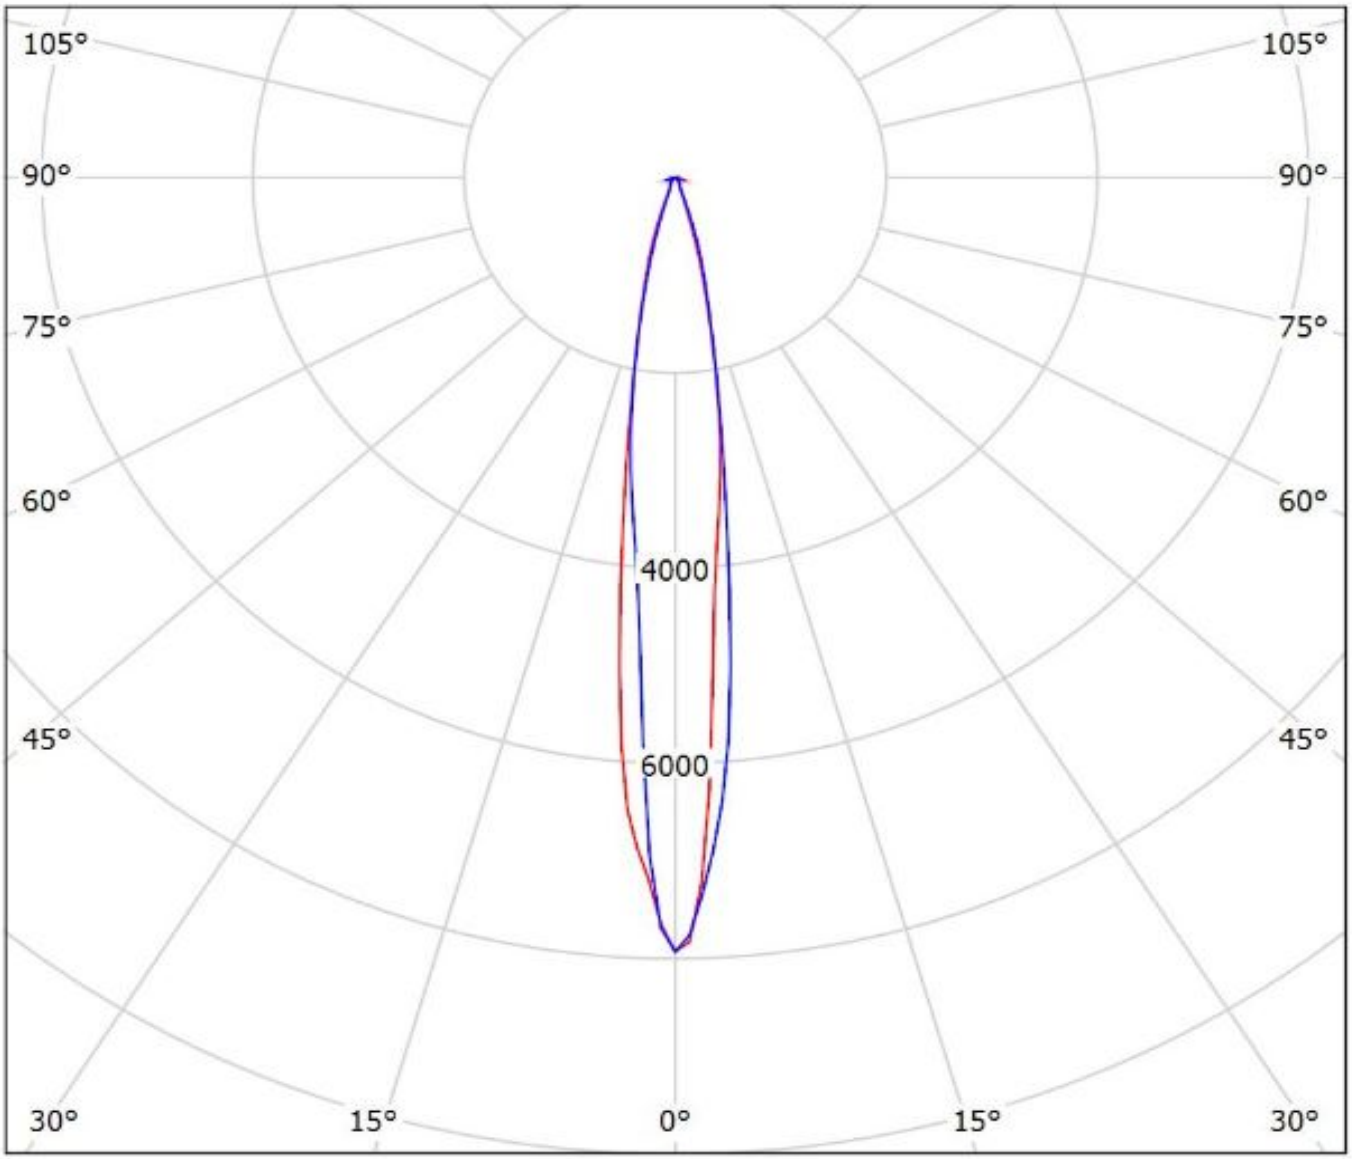


cd/klm

η = 94%


C0 - C180 C90 - C270

Luminaire: Ledil Oy CS14895_HB-IP-2X6-RS_(Duris_P8)_SIMULATED
Lamps: 1 x OSram Duris P8

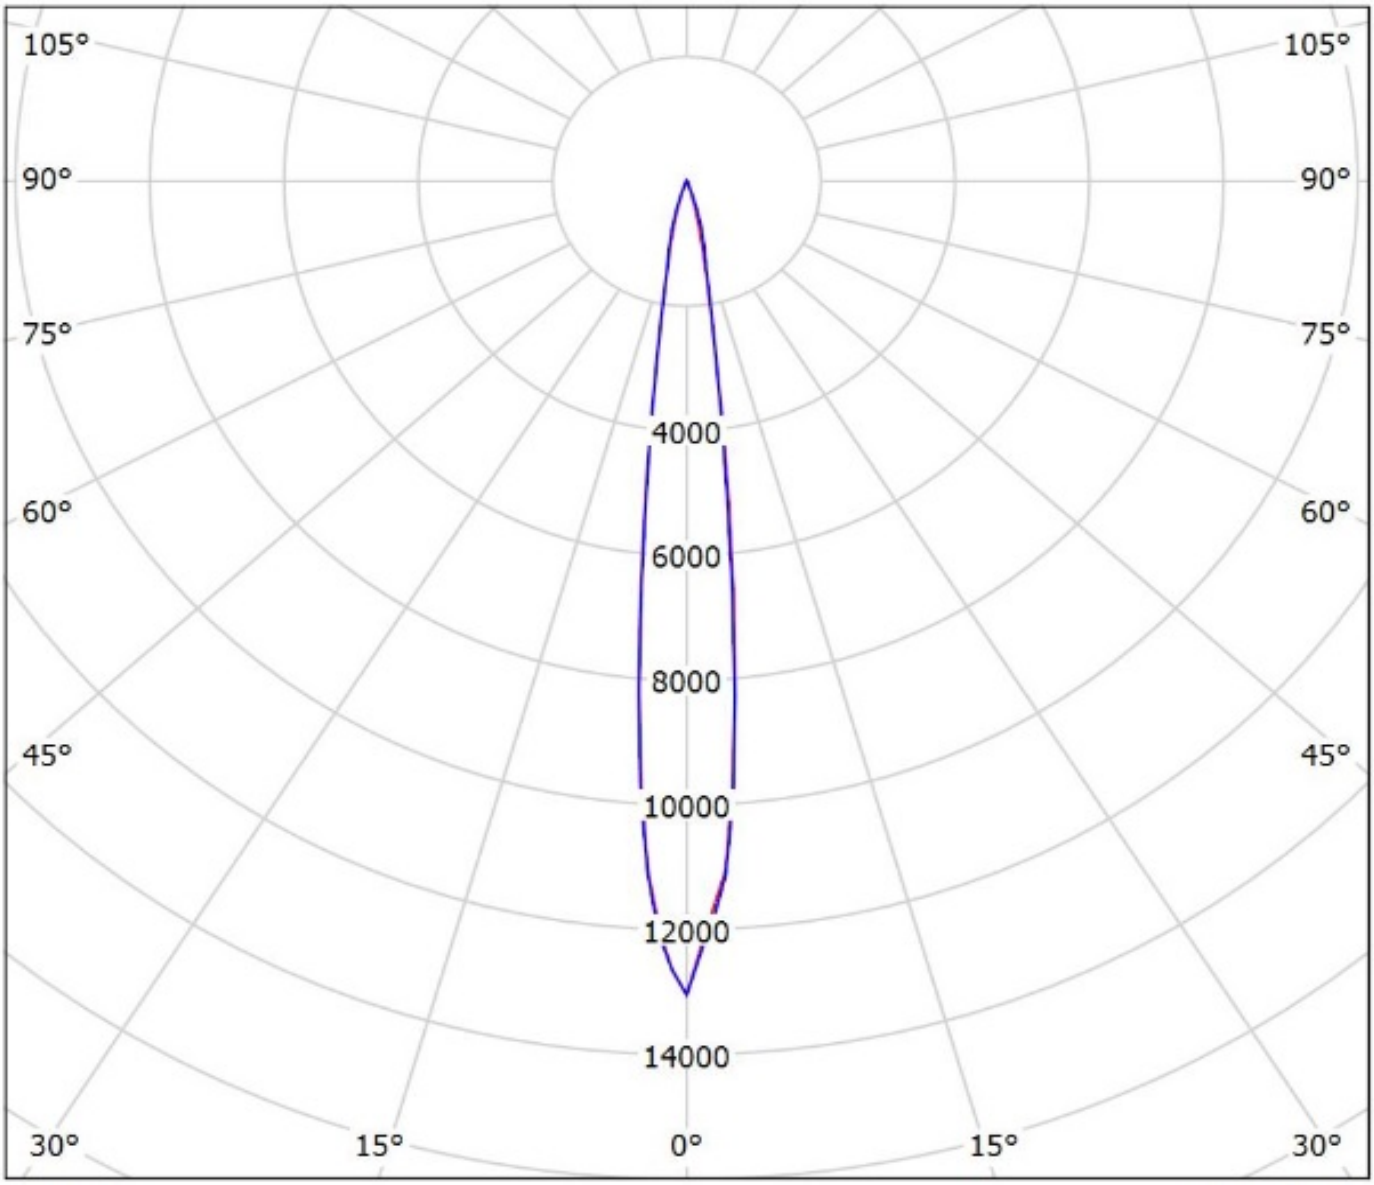


cd/klm
C0 - C180
C90 - C270
η = 89%


Luminaire: LEDiL Oy CS14895_HB-IP-2X6-RS_Fortimo FastFlex LED board 2x6 DP G4
Lamps: 1 x Fortimo FastFlex LED board 2x6 DP G4

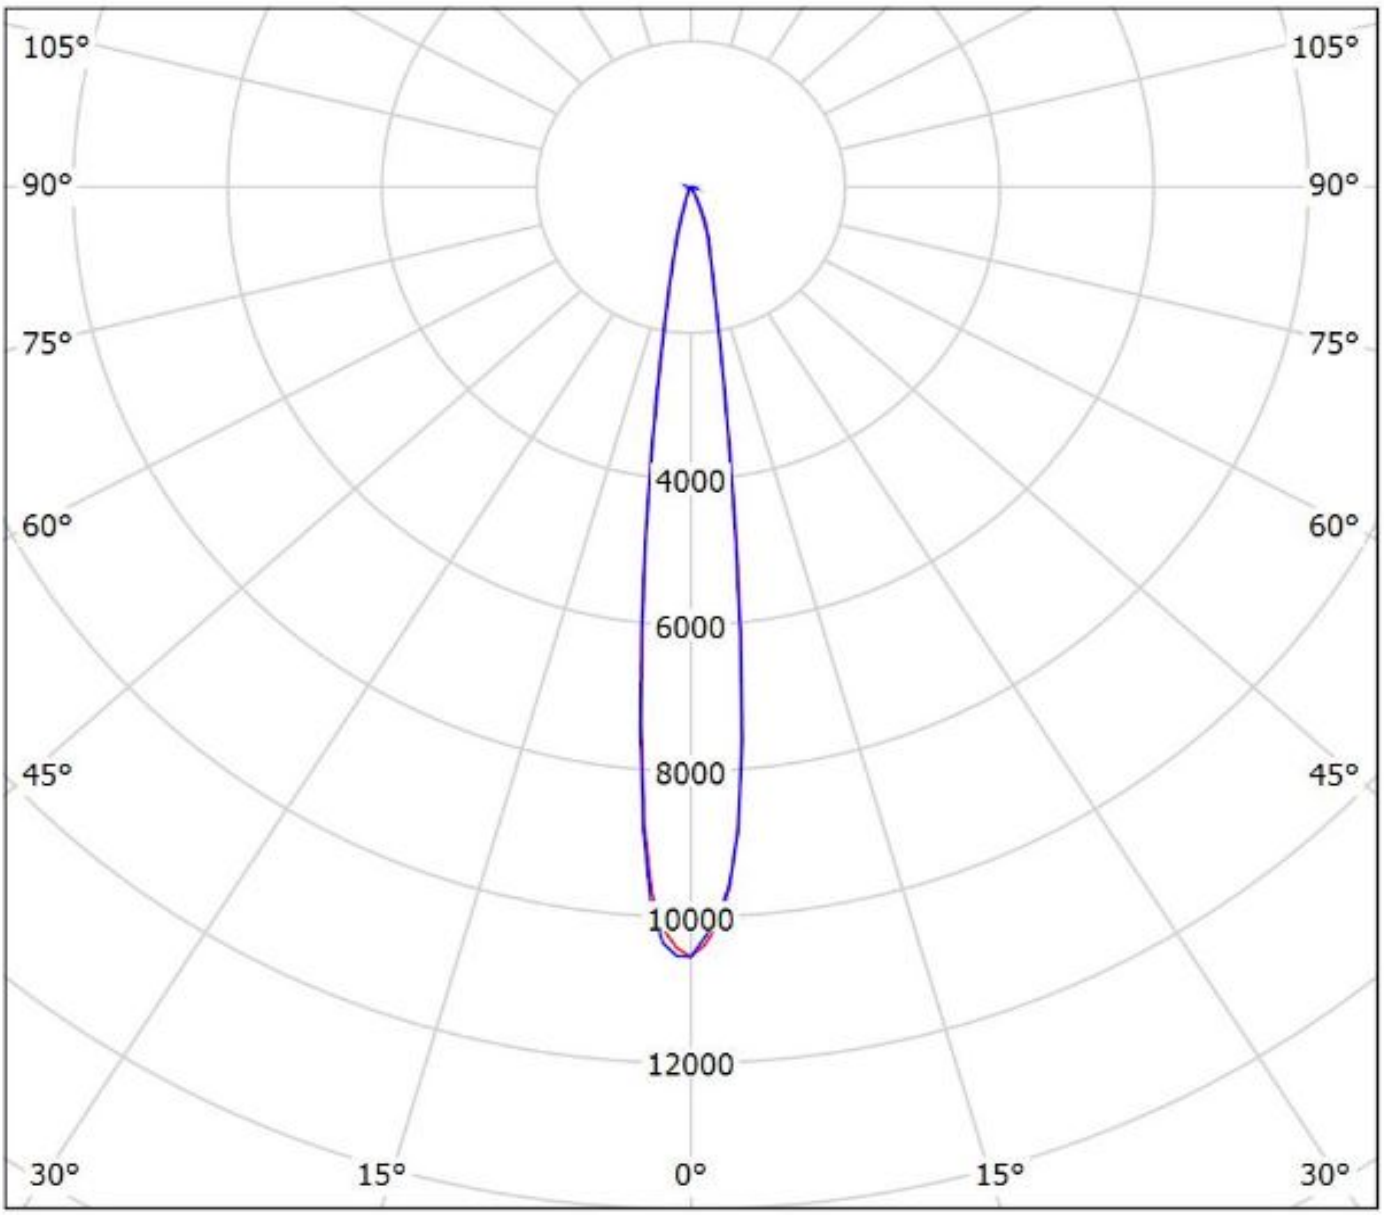

Luminaire: LEDiL Oy CS14895_HB-IP-2X6-RS_(Z5M2)
Lamps: 1 x Seoul_Z5M2_2x6_(SZ5-M2-W0-00)_1510.16lm@250mA_P=8.57039W_I=0.25A

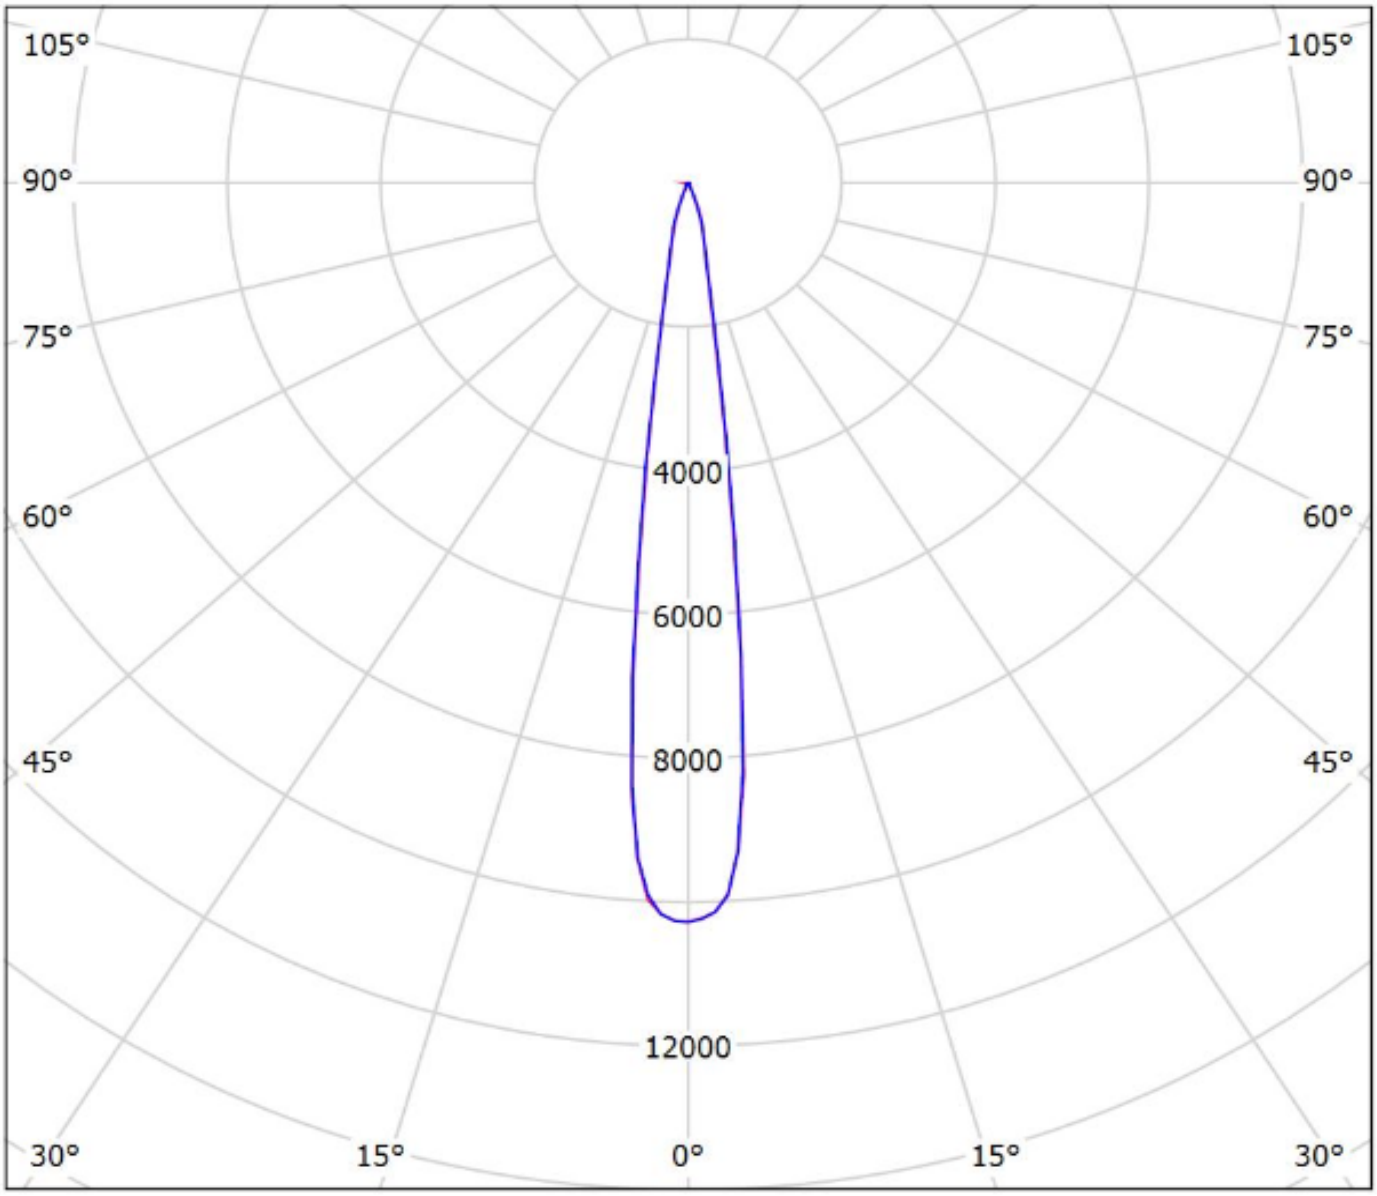

Luminaire: Ledil CS14895_HB-IP-2X6-RS_(Z8Y22_PLUS)
Lamps: 1 x Seoul_Z8Y22_PLUS_2X6_(SZ8-Y22-W0-C7P)1489.65lm@250mA_P=8.30675W_I=0.250A

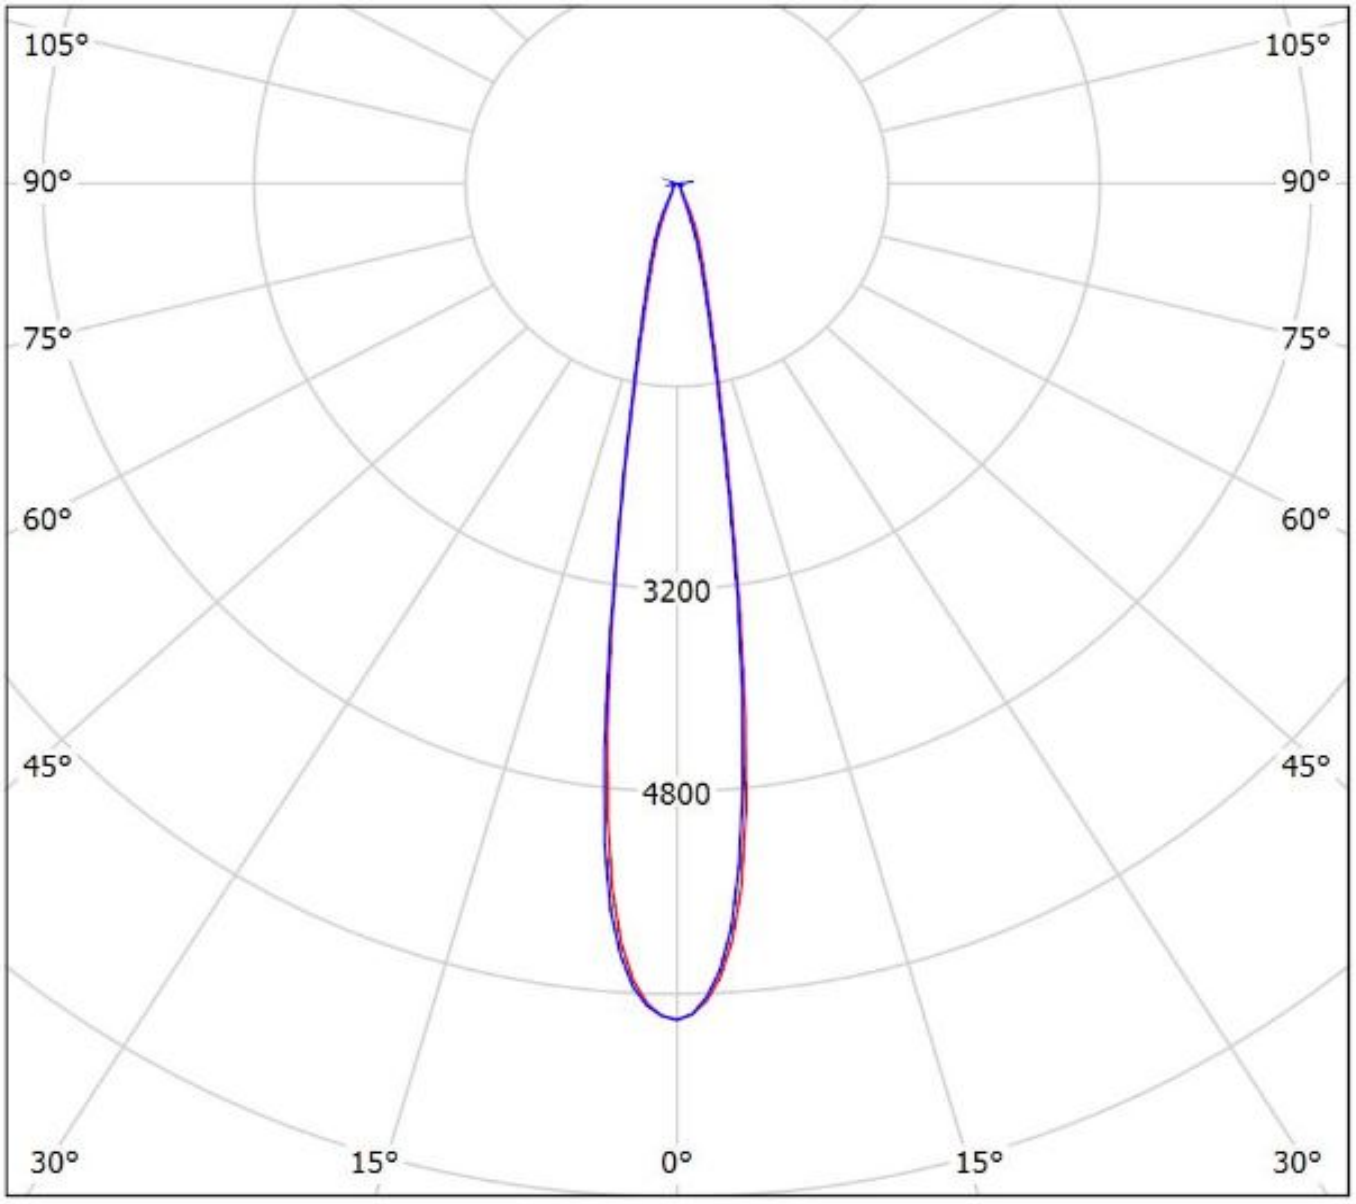

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.